

Instant Replay

Instant Replay II

Demonstrations Tutorials Presentations Proto Types Menus Music

Build tutorial replays of actual programs, or animated proto types. Memorize and replay keystrokes and pause times. Has the unusual ability to insert prompts, pop-ups, proto types, user involvement, music, and branching menus into replays.

Includes Screen Maker, Keystroke/Time Editor, Proto Typer, Text Editor, Music Maker, Menu Maker, Screen Grabber, Animator, Control and Insertion Guides.

"I highly recommend Instant Replay." Computer Language

"Indispensable...A clear improvement over Dan Bricklin's Demo Program." PC Magazine

"Instant Replay brings new flexibility to prototypes, tutorials, and their eventual implementation." Electronic Design

"When replayed it will appear that the tutorial was part of the program." PC WEEK

"Incredible...we built our entire Comdex Presentation with Instant Replay." Panasonic

250 Page Manual, Online Tutorial, 60 day satisfaction money back guarantee.
(Not Copy Protected)

Call or Write. We accept Visa, Amex, Master Card, COD, PO. Dealer Inquiries Welcome. Outside US pays postage.

_____ Instant Replay II (tm) \$ 149.95 _____ Demo Diskette \$ 5.00 ____ Dealer Poster \$ 3.00 Nostradamus Inc.
3191 South Valley Street (ste 252)
Salt Lake City, Utah 84109
(801) 487-9662

"No Royalties"

The most up-to-date training in the UNIX System, from the people who keep the UNIX System up-to-date.



AT&T. Created to train AT&T's own professionals, our curriculum is the most comprehensive available—including C language as well as UNIX. And every course is practical and job-related.

Training for everyone

- ☐ Systems developers
- ☐ Applications programmers ☐ Technical specialists
- ☐ System managers and users Whatever your specialty, AT&T has the right curriculum, from basic overviews to programming to business applications and data communications. And every course is kept up-to-the-minute with such recent advances as System V Release 3.0.

Individual attention

Classes are limited in size, so that each student can be given individual instruction and supervision. In laboratory classes, each student is assigned his own terminal. Instruction is by AT&T UNIX veterans and is personal, thorough, productive.

Classes forming now

Reserve as quickly as possible for preferred dates at our com-

pletely equipped training centers in Atlanta, Chicago, Dublin, OH, Los Angeles, Princeton, NJ, and Sunnyvale, CA. Or we'll arrange instruction on your site at your convenience. But don't wait—call or write now for information and seat reservations.

Free fact-packed training catalog: Call 1800 247-1212 or mail this coupon.




Registrar, AT&T Training, P.O. Box 45038, Jacksonville, FL 32232-9974

Please rush me your course catalog with information on: ☐ UNIX System training ☐ UNIX System video training ☐ Data communications and networking training

Address

Phone !


The right choice.

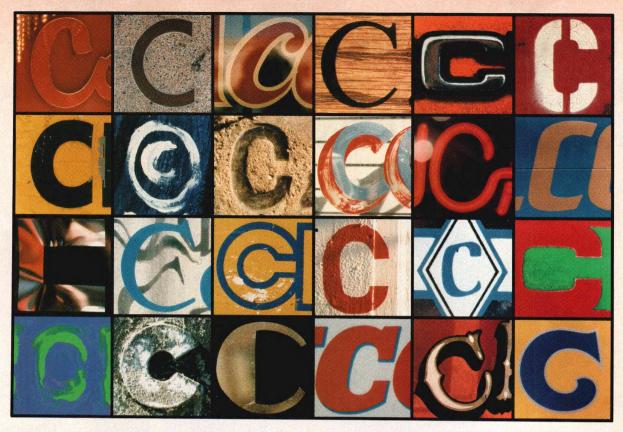

NEW! FROM BLAISE COMPUTING

Today's programmers need more than vesterday's tools. Requirements such as removable windows and "sidekickable"

pop-up utilities are changing the face of program design. You need to filter interrupts so that other resident programs still work. You



SOLID LIBRARY SUPPORT

Blaise Computing offers you solid library support that can meet all your demands and more. C TOOLS PLUS embodies the full spectrum of generalpurpose utility functions that are critical to today's applications.

Here's just part of the PLUS in C TOOLS PLUS:

- ◆ C TOOLS and C TOOLS 2 compatibility—two packages that receive rave reviews for quality, organization, usability and documentation.
- **♦ FULL SOURCE CODE**

C Tools Plus

For The Programmer Whose Alphabet Begins & Ends

With "C"

- ♦ WINDOWS that are stackable, removable, that support word wrap and that can accept user input.
- **♦ INTERRUPT SERVICE ROUTINE** support for truly flexible, robust and polite resident applications.
- ◆ MULTIPLE monitor and display support, including EGA 43-line mode.
- **◆ FAST DIRECT VIDEO ACCESS for** efficiency that will not constrain good program design.
- **◆ DOCUMENTATION, TE**

SUPPORT and attention to detail that have distinguished Blaise Computing products over the years.

C TOOLS PLUS supports the Microsoft (and IBM) 3.00 and Lattice 3.00 C compilers and is just \$175.00.

Also Available Are: C VIEW MANAGER —

A kit for building data entry screens and menus. Begin by designing onscreen what the operator will see; call upon our library functions from your program to display the screens and retrieve the data. Just \$275, in-

> cluding all library source code.

C ASYNCH MAN-AGER — provides the crucial core of hardware interrupt support needed to build applications that communicate. It

also includes the "XMODEM" file-transfer protocol and support for Hayes-compatible modems. All source code is included for \$175. C TOOLS & C TOOLS 2—an indispensable combination still available at a low price of \$175, including all source code. See review in PC Tech Journal, 6/85.


BLAISE COMPUTING INC.

2560 Ninth Street, Suite 316 Berkeley, CA 94710 (415) 540-5441


ORDER TOLL-FREE 800-227-8087!

INICAL	for
 YES, send me the PLUS I need! Enclosed is \$_C TOOLS PLUS. (CA residents add 61/2% Sales Tax. All do orders add \$10.00 for Federal Express shipping.)	mestic
Name: Shipping Address: City: VISA or MC #: State: Exp. Da	te:

	ARTICLES	
Computers > and music	MUSIC: Pushing the Sound Envelope by David Levitt A brief history of computer music and a look at some recent developments in MIDI programming, sampling, transient-oriented synthesis methods, and programs that compose and collaborate on original music.	16
Getting started > with MIDI	MUSIC: Designing a Music Recorder by Mark Garvin Mark shows how to design a software-based music recorder using MIDI.	22
Dimensional ▶ data types in Ada	SCIENTIFIC: Dimensional Data Types by Do-While Jones Using dimensional units as data types can facilitate the writing of clearer, more easily maintained code. Do-While presents example programs in Ada.	50
	COLUMNS	
C filters ▶ in statistics	C CHEST by Allen Holub Allen looks at statistical applications of digital low-pass filters, a set of subroutines that has applications in both scientific and music programming.	102
Command processors	16-BIT SOFTWARE TOOLBOX by Ray Duncan Ray looks at some "quality of life tools" for MS-DOS programmers, namely, Command Plus, and ProCED.	118
True BASIC and Modula-2	STRUCTURED PROGRAMMING by Namir Clement Shammas Namir analyses True BASIC modules and compares modules	124

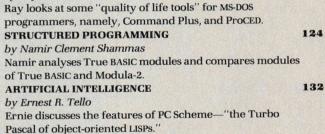

	FORUM		PROGRAMMER' SERVICES	S
	EDITORIAL by Michael Swaine	6	More on new BASIC	144
	RUNNING LIGHT	8	subroutines BOOKS:	146
	by Allen Holub ARCHIVES	8	Numerical Recipes: The A	
	LETTERS	10	Scientific Computing	
17	by you		OF INTEREST:	148
	VIEWPOINT by Philip J. Erdelsky	14	New products out there ADVERTISER INDEX:	151
	SWAINE'S FLAMES by Michael Swaine	152	Where to find those ads	



About the Cover

Programmers who have always longed to play (or play with) music and musicians with techie tendencies and a yen to create new sounds would feel right at home in the tableau pictured on this month's cover.

This Issue

What is it that draws so many programmers towards making music? Maybe it's the interactiveness of the process or the fact that a piece of music is something that can be shared with everyone (unlike a good piece of code, which only other programmers can appreciatel, or maybe it's because computer music is a new frontier. Most likely it is a combination of these factors, plus the fact that making tools for making music is as fun and interesting as the end result. Here we look at the roots of computer music and at some interesting work to be done in this area on today's microcomputers. We also look at scientific programming with an article on dimensional data types by Do-While Jones, and Allen Holub covers both music and scientific programming in C Chest.

Next Issue

We've planned some very practical pieces for June. The lead article presents an algorithmic solution to the problem of sharing on-line resources using large priority queuing. We'll also have how-to articles about an extended communications port driver and building a two-bit analog to digital convertor.

computers can

Object-oriented

Ignoble and

mercenary motives

Things

never do

LISP

The fastest C

Your search for execution speed is over. The new Microsoft® C Compiler Version 4.0 is here. With blazing performance. We've added common sub-expression elimination to our optimizer that produces code that rips through the benchmarks faster than ever before.

"...the Microsoft performance in the benchmarks for program execution is the best of the lot overall." -William Hunt, PC Tech Journal, January, 1986.*

But speed isn't the only edge you get with Microsoft C. Other advantages include a variety of memory models like our new HUGE model that breaks the 64K limit on single data items. Plus our NEAR, FAR and HUGE pointers, which provide you greater flexibility. All this allows you to fine tune your program to be as small and fast as possible.

"Excellent execution times, the fastest register sieve, and the best documentation in this review ... Microsoft Corporation has produced a tremendously useful compiler."-Christopher Skelly, Computer Language, February, 1986.

> No more debugging hassles. Introducing CodeView. Free.

Now, for a limited time, we'll give you an unprecedented programming tool when you buy Microsoft C, free. New Microsoft Code-View™offers the most powerful tool yet in



the war on C bugs. Forget the hex dumps. Now you can view and work with programs at any level you want. Use the program source, the disassembled object code, or

Microsoft C Compiler Version 4.00

Microsoft C Compiler

- Produces fast executables and optimized code including elimination of common sub-expressions.
- Implements register variables.Small, Medium and Large Memory model libraries.
- Compact and HUGE memory model libraries.
 Can mix models with NEAR, FAR and the new HUGE pointers.
 Transport source and object code between MS-DOS® and XENIX®.
- operating systems. Library routines implement most of UNIX™ System V C library.
- Start-up source code to help create ROMable code.
 Full proposed ANSI C library support (except clock) NEW! NEW!
- · Large number of third party support libraries available Choose from three math libraries and generate in-line 8087/80287
 - instructions or floating point calls: floating point emulator (utilizes 8087/80287 if installed).
 - 8087/80287 coprocessor support.
- alternate math package extra speed without an 8087/80287.
 Link your C routines with Microsoft FORTRAN (version 3.3 or
- higher), Microsoft Pascal (version 3.3 or higher) or Microsoft Macro Assembler.
- Microsoft Windows support and MS-DOS 3.1 networking support.
 Supports MS-DOS pathnames and input/output redirection.

Microsoft Program Maintenance Utility. NEW!

- Rebuilds your applications after your source files have changed.
- Supports macro definitions and inference rules.

Other Utilities

- Library Manager.
- · Object Code Linker.
- EXE File Compression Utility.
- EXE File Header Utility.

C Benchmarks

In seconds

	Microsoft C 4.0	Lattice C 3.0	Computer Innovation C 2.3	Aztec C86 3.2	Wizard C 3.0
Sieve of Eratosthenes					
(register) Copy Block	82.9 86.9	151.4 231.7	172.3 199.0	88.0 123.8	91.9 189.5

Run on an IBM PC XT with 512K memory

Microsoft CodeView Window-oriented source-level debugger. NEW!

- · Watch the values of your local and global variables and expressions as you debug.
- Set conditional breakpoints on variables, expressions or memory; trace and single step.
- · Watch CPU registers and flags as you execute.
- Effectively uses up to four windows.
- Debug using your original source code, the resulting disassembly or both intermingled.
- Use drop-down menus to execute CodeView commands.
- · Access the on-line help to lead you through CodeView's options
- and settings.

 Easily debug graphics-oriented programs since program output is kept separate from debugger output.

 Keyboard or optional mouse support.

 Enter in familiar SYMDEB or DEBUG commands.

you've ever seen.

both at the same time. Open a window to view CPU registers and flags. Watch local and global variables as well. All while your

program is running.


CodeView gives you complete control. Trace execution a line at a time—using source or assembly code. Or set conditional breakpoints on variables, memory or expressions. CodeView supports the familiar SYMDEB command syntax, as you'd expect. Commands are also available through dropdown menus. Combine the new windoworiented interface with our on-line help and debugging has never been easier. Or quicker.

Take the \$5 CodeView tour.

You may find it hard to believe our debugger can do all we've claimed. So we're offering test drives. Five bucks will put you behind the wheel of a Microsoft C demo disk with CodeView.† See for yourself how fast debug-

ging can get.

For more information about the Code-View demo disk, the new Microsoft C Compiler, a list of third party library support or the name of your nearest Microsoft dealer, call (800) 426-9400. In Washington State and Alaska, (206) 882-8088. In Canada call (416) 673-7638.

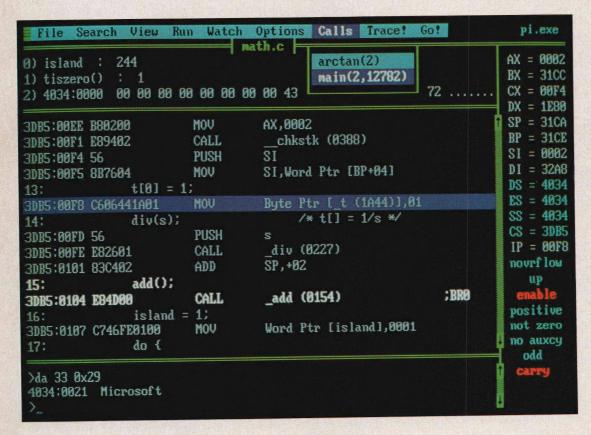

Microsoft C Compiler

The High Performance Software

Microsoft, MS-DOS and XENIX are registered trademarks and CodeView is a trademark of Microsoft Corporation. UNIX is a trademark of AT&T Bell Laboratories. IBM is a registered trademark of International Business Machines Corporation. †Offer expires 12/31/86.

EDITORIAL

hen giants sneeze, they set the sod ashiver and shake the sedentary stones.

When the Lotus Development corporate nose got irritated by products that copied the look and feel of its successful spreadsheet product, it blew up a lot of dirt, and from


under scattered rocks slithered and scuttered the hungry lawyers.

At press time, things were looking bad for the lawyers.

Lotus had brought suit against Paperback Software and Mosaic Software over alleged copyright infringement of Lotus 1-2-3 by these companies' products, VP-Planner and The Twin, respectively. Lotus was not contending that these companies copied Lotus code but rather that their products, in being keystroke-for-keystroke compatible with 1-2-3, infringed on the copyrighted "look and feel" of 1-2-3.

Now that the copyright office has determined that there is no copyrightable look and feel to 1-2-3, Lotus' case is much weaker, but the issues the case raised will not go away. Critics such as Dan Bricklin, who created VisiCalc, the first electronic spreadsheet, have argued that to protect the keystoke sequences of a product denies competitors access to perhaps the most compelling feature a commercial software product can have: familiarity.

The suit, or one like it, could have enormous implications for innovation and advance in software development. Although VP-Planner and The Twin are anything but innovative, a decision against the imitators in such a case could make even truly innovative developers more cautious in bringing products to market. It also would remove one incentive to improve existing products. As Bricklin put it, "you won't have to do ver-



sion two, because nobody else will be able to.

At least one editor has questioned the motives of Lotus executives, but surely their motives are beyond question. In this particular instance, the motives of the executives at Lotus and Paperback and Mosaic were

ignoble and mercenary. Innovation issues have been raised by the Lotus look-and-feel case, to be sure, but the actions and motivations of the corporations involved had to do not with innovation but with profits.

These executives were undoubtedly behaving appropriately in this. Corporations exist to make profits for their stockholders, not to innovate, pioneer, or upgrade products, except as such actions may seem to them to be necessary steps to profits. These corporate executives smelled wealth in the well-trod ground of the Lotus 1-2-3 user interface. If the companies involved in the Lotus suit did not take a particularly high-minded view, it was because they were keeping their eyes on the turf.

As a market, the 1-2-3 turf is rich indeed, but, surveying it technologically, the ground these companies chose to squabble over is played out. The pace of technological development in personal computer software has left Lotus 1-2-3 behind, even though it is still healthy as a product.

But what-can-be still can drive what-will-be in the software market, and before long someone will bring the spreadsheet market up to date with the technology. I look forward to some innovative competitor leaving Lotus 1-2-3 and its archaic interface in the dust-even if it has to be Microsoft.

-Michael Swains

Michael Swaine editor-in-chief

Dr. Dobb's Journal of **Software Tools**

Editorial

Editor-in-Chief Michael Swaine Managing Editor Vince Leone

Assistant Editors Sara Noah Ruddy Levi Thomas

Technical Editor Allen Holub Consulting Editor Nick Turner Contributing Editors Ray Duncan

> Michael Ham Bela Lubkin Namir Shammas Ernest R. Tello

Copy Editor Rhoda Simmons Production

Production Manager Bob Wynne Art Director Michael Hollister Assoc. Art Director Joe Sikoryak Typesetter Jean Aring Technical Illustrator Frank Pollifrone

Cover Artist Michael Carr Circulation

Circulation Director Maureen Kaminski Newsstand Sales Mgr. Stephanie Ericson Book Marketing Mgr. Jane Sharninghouse Circulation Coordinator Kathleen Shav

Administration Finance Director Kate Wheat Business Manager Betty Trickett Accounts Payable Supv. Mayda Lopez-Quintana Accts. Receivable Supv. Laura Di Lazzaro

Account Managers Lisa Boudreau (415) 366-3600 Garv George (404) 897-1923 Michael Wiener (415) 366-3600 Cynthia Zuck (718) 499-9333 Promotions/Srvcs. Mgr. Anna Kittleson Advertising Coordinator Charles Shively

M&T Publishing Inc.

Chairman of the Board Otmar Weber Director C. F. von Quadt President and Publisher Laird Foshay Associate Publisher Michael Swaine

Dr. Dobb's Journal of Software Tools (USPS 307690) is published monthly by M&T Publishing Inc., 501 Galveston Dr., Redwood City, CA 94063; (415) 366-3600. Second-class postage paid at Redwood City and at additional entry points.

Article Submissions: Send manuscripts and disk (with article and listings) to the Editor.

DDJ on CompuServe: Type GO DDJ

Address Correction Requested: Postmaster: Send Form 3579 to Dr. Dobb's Journal, P.O. Box 27809, San Diego, CA 92128. ISSN 0888-3076

Customer Service: For subscription problems call: outside CA (800) 321-3333; in CA (619) 485-9623 or 566-6947. For book/software order problems call (415) 366-3600

Subscriptions: \$29.97 per 1 year; \$56.97 for 2 years. Canada and Mexico add \$27 per year airmail or \$10 per year surface. All other countries add \$27 per year airmail. Foreign subscriptions must be prepaid in U.S. funds drawn on a U.S. bank. For foreign subscriptions, TELEX: 752-351.

Foreign Newsstand Distributor: Worldwide Media Service Inc., 386 Park Ave. South, New York, NY 10016; (212) 686-1520 TELEX: 620430 (WUI)

Entire contents copyright © 1987 by M&T Publishing Inc. unless otherwise noted on (ABC specific articles. All rights reserved.



People's Computer Company Dr. Dobb's Journal of Software Tools is published by M&T Publishing Inc. under license from People's Computer Company, 2682 Bishop Dr., Suite 107, San Ramon, CA 94583, a nonprofit corporation.

Our thanks to NASA for supplying this computer enhanced ultraviolet photo taken by Skylab IV of a solar prominence reaching out 350,000 miles above the sun's surface

Genius Begins With A Great Idea ...

But The Idea Is Just The Beginning

What follows is the time consuming task of giving form and function to the idea.

That's why we concentrate on building into our software development systems functions and features that help you develop your software ideas in less time and with less effort.

We've started 1987 by releasing new versions of our MS-DOS, Macintosh, Amiga, ROM, and Apple // C development systems. Each system is packed with new features, impressive performance, and a little bit more genius.

Aztec C86 4.1 New PC/MS-DOS • CP/M-86 • ROM

Superior performance, a powerful new array of features and utilities, and pricing that is unmatched make the new Aztec C86 the first choice of serious software developers.

Aztec C86-p Professional System \$199
• optimized C with near, far, huge, small, and large memory + Inline assembler + Inline 8087/80287 + ANSI support + Fast Float (32 bit) + optimization options • Manx Aztec 8086/80x86 macro assembler
• Aztec overlay linker (large/small model) • source level debugger • object librarian • 3.x file sharing & locking • comprehensive libraries of UNIX, DOS, Screen, Graphics, and special run time routines.

Aztec C86-d Developer System\$299
• includes all of Aztec C86-p • Unix utilities make, diff, grep • vi editor • 6 + memory models • Profiler.

Aztec C86-c Commercial System. \$499
• includes all of Aztec C86-d • Source for library routines • ROM Support • CP/M-86 support • One year of updates.

Aztec C86 Third Party Software

A large array of support software is available for Aztec C86. Call or write for information. The following is a list of the most requested products: Essential Graphics • C Essentials • C Utility Library • Greenleaf Com. • Greenleaf General • Halo • Panel • PClint • PforCe • Pre-C • Windows for C • Windows for Data C terp • db Vista • Phact • Plink86Plus • C-tree.

CP/M • TRS-80 • 8080/Z80 ROM

C compiler, 8080/Z80 assembler, linker, librarian, UNIX libraries, and specialized utilities.

Aztec C II-c (CP/M-80 & ROM)	\$349
Aztec CII-d (CP/M-80)	.\$199
Aztec C80 (TBS-80 3&4)	

Aztec C68k/Am 3.4 New Amiga Release

Amiga user groups across the USA voted Aztec C68k/Am release 3.3 the best Software Development System for the Amiga. Release 3.4 is more impressive.

Aztec C68k/Am-p Professional \$199
A price/feature/performance miracle. System includes: optimized C • 68000/680x0 assembler • 68881 support • overlay linker • UNIX and Amiga libraries • examples.

Aztec C68k/Am-d Developer\$299
The best of Manx, Amiga, and UNIX. System includes: all of Aztec C68k/Am-p • the Unix utilities make, diff, grep and vi.

Aztec C68k/Am-c Commercial \$499 Aztec C68k/Am-d plus source for the libraries and one year of updates.

Aztec C68k/Mac 3.4 New Macintosh Release

For code quality, reliability, and solid professional features, Aztec C for the Macintosh is unbeatable. This new release includes features and functions not found in any other Macintosh C development system.

Aztec C68k/Mac-p Professional \$199
• optimized C • 68000/680x0 assembler • 68881 support • overlay linker • UNIX and Macintosh libraries • examples.

Aztec C68k/Mac-d Developer \$299
The best of Manx, Macintosh, and UNIX. System includes: all of Aztec C68k/Am-p • the Unix utilities make, diff, grep • vi editor.

Aztec C68k/Mac-c Commercial \$499 Aztec C68k/Am-d plus source for the libraries and one year of updates.

Aztec C65 New ProDOS Release

Aztec C65 is the only commercial quality C compiler for the Apple II. Aztec C65 includes C compiler, 6502/65C02 assembler, linker, library utility, UNIX libraries, special purpose libraries, shell development environment, and more. An impressive system.

Aztec C65-c Commercial \$299
• runs under ProDOS • code for ProDOS or DOS 3.3

Aztec ROM Systems 6502/65C02 • 8080/Z80 • 8086/80x86 • 680x0

An IBM or Macintosh is not only a less expensive way to develop RCM code, it's better. Targets include the 6502/65C02, 8080/Z80, 8086/80x86, and 680x0.

Aztec C has an excellent reputation for producing compact high performance code. Our systems for under \$1,000 outperform systems priced at over \$10.000.

Initial Host Plus Target							.\$750
Additional Targets							
ROM Support Package							

Vax, Sun, PDP-11 ROM HOSTS

Call for information on Vax, PDP-11, Sun and other host environments.

C' Prime PC/MS-DOS • Macintosh Apple II • TRS-80 • CP/M

These C development systems are unbeatable for the price. They are earlier versions of Aztec C that originally sold for as much as \$500. Each system includes C compiler, assembler, linker, librarian, UNIX routines, and more. Special discounts are available for use as course material.

C' Prime\$75

Aztec Cross Development Systems

Most Aztec C systems are available as cross development systems. Hosts include: PC/MS-DOS, Macintosh, CP/M, Vax, PDP-11, Sun, and others. Call for information and pricing.

How To Become An Aztec C User

To become a user call 800-221-0440. From NJ or international locations call 201-542-2121. Telex: 4995812 or FAX: 201-542-8386. C.O.D., VISA, MasterCard, American Express, wire (domestic and international), and terms are available. One and two day delivery available for all domestic and most international destinations.

Aztec C is available directly from Manx and from technically oriented computer and software stores. Aztec Systems bought directly from Manx have a 30 day satisfaction guarantee.

Most systems are upgradable by paying the difference in price plus \$10. Site licenses, OEM, educational, and multiple copy discounts are available.

To order or for more information call today.

1-800-221-0440

1-800-221

MS is a registered TM of Microsoft Inc. CPIM TM DRI HALO TM Media Cybernetics, PANEL TM Roundhill Computer Systems, LM PHACT Associated Computer Systems, LM PHACT Associated Computer Systems, LM Register Systems, LM Register Systems,

RUNNING LIGHT

ost of the content of this issue has to do with either scientific programming or music. Scientific programming yes, but why music in a programmers' magazine?

Maybe you think the connection needs no explanation, particularly if you, like many professional programmers, are a musician. It seems that just as visual artists often support themselves doing paste-up, many musicians earn a living as programmers. In any case, there is a remarkably large overlap between computer programmers and musicians.

But more to the point, the application of computers to musical problems is often fascinating from a pure programming perspective. A truly interactive music system has to understand what's happening musically—a nontrivial problem in artificial intelligence. Moreover, music programs have some of the most complex, and most interesting, user interfaces going. They use graphics to a higher degree than most programs do and have to do sophisticated things on the output side, juggling the control of several other computers and synthesizers. What is MIDI if not a multiprocessor system communicating over a network?

What I'm saying here is that the problems of computer music are most often programming problems, of interest to the musician and non-musician alike.

This issue covers the music theme with three music-related articles. David Levitt's piece discusses some of the newer trends in music-related hardware and software. It may pique the curiosity of even tone-deaf coders enough to get them interested in solving some of the programming



problems David presents. Mark Garvin discusses MIDI, but from the not-often-taken perspective of how to store and retrieve the staggering amount of data that comes across

the network. Finally, this month's C Chest discusses digital low-pass filters and demonstrates the universality of music software by applying these filters to statistical applications.

The one sour note in this issue, to my ear at least, is that there's not a whole lot of code. I'm hoping that those of you who are both programmers and musicians will send us articles about some of the programs you've written. If you have something useful you'd like to share, send it in.

Maybe together we can advance the state of the music software art.

Allen Holub technical editor

ARCHIVES

Math in DDJ

"My experiences during the the last few months vividly illustrate the fact that there are plenty of good mathematical problems still waiting to be solved almost everywhere you look—especially in areas of life where mathematics has rarely been applied before. Mathematicians can provide solutions to these problems, receiving a double payoff—namely the pleasure of working out the mathematics, together with the appreciation of the people who can use the solutions. So let's go forth and apply mathematics in new ways."—"Mathematical Typography," Donald E. Knuth, DDJ, March 1980.

"I use a Polymorphic 8813 as a home system. As a precision buff, I was delighted by their newest release of BASIC which among the many other features, has a variable precision 'settable' from 6 to 26 digits. By the way, this precision holds for all of the trigonometric and other math functions unlike so-called double precision calculations in some other BASICS."—Letter to the Editor, John W. McGraw, DDJ, March 1980.

"I trust that anyone with even the slightest love for mathematics (however deep) will want to see how mathematical tools can be applied to the problems of programming."—"An Introduction to Algorithm Design," Jon Louis Bentley, DDJ, April 1980.

Ten Years Ago in DDJ

"Computers are considered to be useful tools with which to achieve a specific end result such as processing a payroll or calculating a trajectory. This view of computers has often been carried over into educational applications with the computer cast in the role of teacher/tutor. The low-cost home/school system described here (called FRED—Flexible Recreational and Educational Device) is intended as a plaything which encourages experimentation and stimulates a desire to learn.—"A Practical, Low-Cost, Home/School Microprocessor System," Joe Weisbecker, DDJ, May 1977.

"One difference from other versions of [computer game] CHASE—if two robots collide in my version, they do not annhialate [sic], but travel as a pair—with some strangly unpredictable consequences! (This was originally a 'bug' in my program, but it was so cute I decided to leave it in!)"—"Video Chase for 8080/VDM," Joseph Jay Sanger, DDJ, May 1977.



Microsoft Avoids Challenge

We challenged Microsoft to a C compiler duel-to-the-finish, comparing compile, link and execution times, and we offered to stop advertising for two months if they won...

by Roy Sherrill, President, Datalight

Microsoft purchased our C-compiler during February 1987 and we still haven't heard from them. OK, Microsoft, we are extending our challenge deadline from April 1, 1987 to May 15, 1987. After all, the Microsoft ad claims "the fastest C you've ever seen." Your reply, Microsoft!

Walter says Optimum-C is better

Walter Bright, the developer of Optimum C, says that Optimum C would win 7 out of 10 benchmarks as compared to Microsoft C, V.4.0. Walter explained to me that Optimum C includes a unique global optimizer that helps create compact code while increasing execution speed up to 30%. By the way, Borland, Walter is still waiting for his copy of Turbo C, V.1.0. Borland's ad claims "the fastest, most efficient and easy-to-use C compiler at any price."

After reviewing Borland's benchmarks, Walter claims that Optimum C is faster. And, as for ease of use, all Datalight C compilers have been shipped with a free Learn C program for the last six months. Also, our new EZ Interactive Editor will show you each syntax error in your source code, then compile or "make" and run your program, all from within the editor. OK, so let the Microsoft challenge begin...

We only ask the following...

The benchmark suite will consist of the set of programs that Microsoft supplied to Computer Language for their February 1987 C compiler review issue. Microsoft will make available the programs to Datalight at least two weeks prior to the benchmarking. The benchmarking will be between Microsoft C 4.0 and Optimum-C. It will occur at a mutually agreed upon time and place. Interested individuals will be allowed to attend. The benchmarks will be compiled and run on a standard IBM PC-AT.

There will be two separate tests for each program: compile and link speed, and execution speed. For each test, a representative from each company will set up the compiler so that it performs at its best.

The benchmarks will be adjusted so that they take sufficiently long to run, that the tolerance involved in timing them is insignificant. The winner is determined by the compiler with the faster execution times for the majority of the benchmarks. We'd like an answer from Microsoft no later than May 15, 1987.

So what's a global optimizer?

A global optimizer looks at an entire function at once, analyzing and optimizing the whole function. A technique called data flow analysis is used by Optimum-C to gather information about each function. This enables your compute-bound programs to execute as much as 30% faster after global

optimization. But, there is one catch...because the global optimizer ruthlessly searches for ways to speed-up execution speed and minimize memory usage, it has relatively slow compile times. No need to worry, though, because you can merely turn the global optimizer off. In fact, you can select all, none, or part of the following optimizations: constant propagation, copy propagation, dead assignment elimination, dead variable elimination, dead code elimination, do register optimizations, global common subexpression elimination, loop invariant removal, loop induction variables, optimize for space, optimize for time, and very busy expressions.

Choose from five memory models

Speed your programs by selecting the memory model that best suits your application.

Model	Code	Data		
Compact	64k total co	de & data		
Small	64k	64k		
Program	1M	64k		
Data	64k	1M		
Large	1M	1M		

Compiling, one step...

Now with the one step DLC program you can create .OBJ, .EXE and .COM files. Also, DLC can handle multiple files and run MASM on your assembly files.

Try Optimum-C risk free

Try Optimum-C for 30 days and if you are not 100% satisfied return it for a full refund. Also available is a C tutorial which is a combination workbook and floppy disk to help lead you through the C language with tutorials, quizzes, and program exercises.

O.K. Microsoft, it's up to you. We've put two months of advertising on the line that says you can't beat Optimum-C to a real test. Your answer, please?

PRICES

Developer's Kit w/ C Tutorial	\$ 99
Optimum-C w/ C Tutorial	\$139
(both with library source)	

Add \$7 for shipping in US/\$20 outside US COD (add \$2.50)

Not Copy Protected

ORDER TOLL-FREE TODAY! 1-800-221-6630

ATTENTION OEMs!

Contact us regarding arrangements.

Microsoft and MS-DOS are registered trademarks of the Microsoft Corporation. Turbo C is a registered trademark of Borland International.

Magazine Reviewers Shocked by DATALIGHT's Performance...

"Reviewing this compiler was quite a surprise for us. For such a low price, we were expecting a "lightweight" compiler. What we got was a package that is as good as or better than most of the "heavyweights." Datalight C implements a complete C language. It also compiles quickly, doesn't take up much disk space, and looks impressive in the benchmarks."

DR. DOBBS, August 1986

"This is a sharp compiler!... what is impressive is that Datalight not only stole the compile time show completely, but had the fastest Fibonacci executable time and had excellent object file sizes to boot!"

COMPUTER LANGUAGE, February 1986

Optimum-C Version 3.0

EZ Interactive Development Environment

NEW! Inline 8087/80287 Math Support

- Full UNIX System 5 C language plus ANSI extensions
- Fast/tight code via powerful optimizations including common sub-expression elimination
- DLC one-step compile/link program
- Multiple memory model support
- UNIX compatible library with PC functions
- · Compatible with DOS linker and assembler
- · Third-party library support
- Automatic generation of .COM files
- Supports DOS pathnames, wild cards, and Input/Output redirection
- Compatible with Lattice C version 3.x
- · Interrupt handling in C
- Debugger support
- ROMable code support/start-up source

MS-DOS® Support Features

- Mouse support
- Sound support
- Fast screen I/O
- Interrupt handler

MAKE Maintenance Utility

- Macro definition support
- MS-DOS internal commands
- Inference rule support
- TOUCH date manager

Tools in Source Code

- cat-UNIX style "type"
- diff-Text file differences
- fgrep-fast text search
- pr-Page printer
- pwd—Print working directory
- wc-Word count

Datalight

17505-68th Avenue NE, Suite 304 Bothell, Washington 98011 USA (206) 367-1803

LETTERS



BASICO9 and OS-9

Dear DDJ.

Brian Capouch was mistaken when he asserted in "The OS-9 Operating System" (January 1987) that the language BASIC09 and the operating system 0S-9 "appeared together in 1981, a few months after the 6809 came into production." For example, the May 1979 issue of *Byte* contained an ad from Southwest Technical Products offering both an MP-09 Processor Card and a 68/09 Computer w/48K. As I recall, these products were being shipped in the second half of 1979.

This confusion is especially misleading because the reason for the

BASIC09 project (which came to include OS-9) was to promote the 6809 processor: BA-SIC09 was to have provided an example of efficient coding, fast execution, and also a language-on-a-ROM for use by OEMs. I was the supervising engineer for the project. and it was especially unfortunate for me that it had still failed to terminate by early 1981, two years after the 6809 was introduced. The 8bit 6809 was competing with the 16-bit 8088 and often came up "a day late and a dollar short" by paper comparison. BASIC09 would have helped, but by 1981 the newdesign window for the 6809 had pretty well closed.

BASIC09 was to be composed of dynamically replaceable memory modules; OS-9 was to be multitasking, real-time, reentrant, and dy-

namically reconfigurable. Of course, these are great buzzwords now, but consider how different these concepts are from the current MS-DOS system and how much better off we'd be if MS-DOS had been forced, by competition, to include these features.

Terry Ritter 2609 Choctaw Trail Austin, TX 78745

Hashing

Dear DDJ,

In response to Edwin T. Floyd's "Hashing for High-Performance Searching" (February 1987), I present the following items:

1. A hash code "qualifier" can be stored (along with the physical address of the data) in the hash bucket. The qualifier can be derived by a function similar to the hash function. When the hash bucket is searched for the desired key, the qualifier will most likely be unique for each different key. A physical read of the actual data item is then required to ensure a correct match; however, a hash miss becomes far less likely using this method. Because the data is kept sep-

arate from the index, it has to be read anyway (especially in the case of a duplicate key), so this method involves extra overhead only in the case of a hash miss or because of the presence of a duplicate key. The major advantages of this method are that the index space required is greatly reduced and the search time for lengthy keys is minimized. For 32-byte keys, for example, a linear index (for binary search) would require at least 34 bytes per entry (32 for the key, 2 for the data address). Assuming a 4-byte hash code qualifier, however, an index entry in a hash bucket would occupy a mere 6 bytes, with the search taking correspondingly less time.

2. Hashing techniques used as a disk database indexing scheme are not much different from the RAM-resident symbol table implementation presented by Floyd. Depending upon the size of the hash table, all or part of the table can be kept in memory, with some kind of buffering technique being an integral part.

A quick-access, hash-indexed database using the technique described above is available from us. It is a disk

database offering hashkeyed and associative (relational) access simultaneously, which hints at the extreme versatility of hash indexing techniques. Although it does not make use of the move-to-front technique, there is no reason why this optimization could not be used. It seems to me that MTF optimization would be especially useful when duplicate keys are involved.

Dave Joy Joy Research & Development 9403 Wallingham Dr. Spring, TX 77379

Dear DDJ.

I was pleased to see hashing discussed in two places in the February issue. It is my experience in developing practical commercial pro-



but MIDI makes the job a lot easier."

Building a Custom Operating System

With Operating System Toolbox you can design your own custom operating system.

Last month, we gave an introduction to the features of Wendin's Operating System Toolbox, a software construction set for IBM PC's and compatibles. This month we'll describe how to write a shell and link it with the Toolbox to create a custom operating system. If you haven't got one already, pick up a copy of the Toolbox from Wendin and follow along. The source code to the examples in this column is available on our own bulletin board at (509) 624-8093, 1200 baud.

The Shell

The shell is one of the most important parts of the operating system, since it determines how the system will interact with the user. The shell is simply a function written in C. Whenever a new process is created, it starts executing the shell. The shell can examine the status of the current process by referencing fields in the *process control block*, an internal data structure maintained by the Toolbox kernel. Such fields include the *process status longword* (PSL), its priority and its state.

Our example allows two kinds of processes: user processes, which accept commands from a terminal and execute them; and subprocesses, which just execute one program and quit. The shell can distinguish between them by examining the PSL_SUBPROC bit in the current process' PSL. A user command can create a process with this bit set to run a single program, or with it clear, to create another user process. This is as easy as giving a different number in one parameter of a create process system call, CREPRC.

Shell Structure

A user process basically performs two tasks over and over again: read a command from the user, and process that command. This is done until a command to exit the operating system is given. Input is read from the user with a QIO or RMS system call on the standard input device. A batch file will just have a filename instead of the name of a terminal here. Optionally, the shell can allow editing of input with function keys and arrow keys; this requires that the input function dif-

ferentiate between file and non-file input devices.

Once the input is read, it is ready to be processed. For simple shells, an if...else if...else structure with string comparisons will suffice. For larger shells with more commands, it is easier to build a table of strings and an accompanying table of pointers to functions, so the shell can scan through the table and execute the corresponding function when it finds a match.

A very important command to include in your shell is the command to run a program. You can run a program in your own process with an EXEIMG call, or as a separate process by calling CREPRC. In our example, CREPRC is used to illustrate the use of PSL__SUBPROC to differentiate between processes. When CREPRC is called, you give it the name of a program to execute, the names of its standard input, output, and error devices, and several other parameters. The new copy of the shell that is executed when the new process starts is responsible for opening the standard devices and loading the program.

If you want the user process to wait until the program finishes before reading another command, you have to wait for the process to delete itself. When this occurs, an event flag will be set for the current process. To wait for this to happen, just use the WAITFR system service. If you want the program to run concurrently, just leave off the wait, and your shell will continue as soon as the other process has been created.

The Example Shell

Our example shell contains two internal commands and the ability to run programs. The PS command gives a list of the processes currently in the system. The EXIT command calls the kernel function *terminate*, which exits the operating system and returns to DOS. If a command the user types doesn't match either of these, the shell will create a subprocess to execute that command as a program. A sample dialogue with this shell is given in Listing 1.

It's easy to add a command to this shell. All you have to do is add another

else if clause to compare the input with the new command name, and appropriate code to process the command. For example, a newuser command could be added to the example shell with only a few lines of code. All it has to do is create a process without the PSL__SUBPROC bit set, and give a communications port as the standard input device. This allows another user to access the system from a remote terminal.

C>example
Welcome to the example shell.
>PS
Our process ID is 3
The priority is 5
>myprog
This is a sample program running
under the example shell. This
program happens to be written in
C, but it could have been written
in any language.
>EXIT
C>

Listing 1. A sample of dialogue with the example shell.

When you write your own shell, you can decide exactly how you want the commands to work. If you want, your *dir* command can just accept filenames or directory names like DOS does. You can just as easily write the *dir* command to accept complicated options for selecting files, like VAX/VMS does. Or you can call it *ls* and have it accept different one-character switches, like UNIX.

Next month, we'll get into the internals of Operating System Toolbox. If you'd like to learn more about operating system design, or if you'd like to build your own custom operating system, get a copy of Operating System Toolbox from Wendin today. For examples of more complex shells, you can buy PCVMS or PCNX, both of which demonstrate the power and flexibility of Operating System Toolbox.

Operating System Toolbox: \$99 Wendin, Inc. P.O. Box 3888 Spokane, WA 99220 (509) 624-8088

CIRCLE 112 ON READER SERVICE CARD

(continued from page 10)

grams that indirect hashing consistently outperforms such often discussed techniques as binary trees as a means for organizing data that is accessed by name (that is, by the value of a string associated with the data).

Although not explicitly stated, the techniques described by Floyd and Holub are types of indirect hashing; indirect hashing consists of the use of a fixed-size array of pointers (the hash table) pointing to chained lists of buckets, each bucket containing a data item and its name. The buckets are allocated dynamically from a heap. The name of each bucket in a given chain hashes to the index of the array element that points to the beginning of the chain. (Floyd incorrectly defines buckets as the elements of the hash table array.)

Any bucket is reached by getting a pointer to the first bucket in a chain from the hash table and then traversing the chain from the first bucket. It is thus easy to keep a pointer to the previous bucket as each bucket is probed. Therefore, it is not necessary to associate a back pointer with each bucket, as Holub does.

Because only one pointer need be associated with each bucket, the space overhead associated with indirect hashing can be held to H + N pointers, where H is the hash table size and N is the number of data items (that is, the number of buckets). The average number of probes is (1 + N)/2H. The space overhead for a binary tree with N data items is 2N pointers, and the average number of probes is at least log(N/2) (base 2 logarithm).

As a specific example, with 1,000 data items and a hash table size of 250, the indirect hashing technique's space overhead is 1,250 pointers and the average number of probes is 3. The binary tree's space overhead is 2,000 pointers and the best average number of probes is 9.

Floyd states that hashing is effective when ordering (for example, alphabetical ordering) is not important. In fact, I have been using a hashing algorithm that permits alphabetical ordering: the hashing algorithm consists of taking 256 times the ASCII value of the first character of the name, adding the ASCII value

of the second character, and dividing the result by 16. (This works with a 4,096-element hash table.) Each chain of buckets is maintained in alphabetical order by inserting each new bucket at the proper place in the chain.

To read out all data items in alphabetical order, then, you simply loop over the hash table elements and, for each nonnull element, read out the buckets of the chain it points to as the chain is traversed. Our products-Source Print and Tree Diagrammerboth use this hashing technique. The simple hash code gives rise to a moderate amount of clustering, but I do not think the clustering is severe enough to seriously degrade probing speed. In fact, Source Print can index all variables within a source code file at about 6,000 lines per minute, and very little of this time is spent dealing with the hashing operations.

Larry R. Miller Aldebaran Labs. 3339 Vincent Rd. Pleasant Hill, CA 94523

Baby Ducks

Dear DDJ,

The wish list for the ultimate editor ["Text Editors," February 1987] surprised me a bit, as the one I use for word processing (simple stuff, such as this letter) and mostly for programming has virtually everything on the list. The package is KEDIT from Mansfield Software Group. It has everything from the Must Haves list, and then some. In the Not Necessary..., it also covers all. In fact, in the entire list of wishes, the only thing it cannot do is edit files larger than memory.

I program in C, and I have macros to do things such as comment or uncomment a line (same key) and my Can't Live Without: given an if or for (while, until . . .) statement, I press a key combo (Ctrl-F2) and it indents and puts an open bracket, blank line, and close bracket followed by a comment (the first 20 characters of the if or loop statement), then positions me at the first indented position of the blank line. I go from:

for(i=0; i<100; i++)

to:

```
for(i=0; i<100; i++)
{
} /* for (i=0; i >100; i++)...*/
```

in one keystroke.

KEDIT has many other features, and for \$125 it is one of the best buys around. No, I don't sell KEDIT or know the firm, but I love to share knowledge about excellent software with others.

Flip Nehrt 1209 N. Topeka Whichita, KS 67214

Dear DDJ.

I read with great interest the article on word processing [February 1987]. I agree with Thomas and Turner about the baby duck syndrome. I wish to offer a wish list in reply:

- 1. Text buffered to mass storage. Wait time should be minimal. Anticipatory loading and dumping could be implemented.
- 2. Response to keyboarding should be adequate, so fast typists do not feel impeded by the computer.
- 3. Reduced command set that works quickly.
- 4. Wordwrap and left and right justification.
- 5. Screen should display the printed page. Special fonts such as italics are unnecessary. After all, who wants to change a daisy for two words. Cute code is expensive.
- 6. Block move, copy, delete, fetch, and store to disk.
- 7. Search and replace globally with case insensitivity.
- 8. Multifile and multiwindow.

What I really want is an editor that can be tailored to the task at hand.

As the good Doctor has always been at the forefront of new developments—providing us with Tiny BASIC and Small-C—perhaps it or its readers could provide us with an editor that is machine independent and extensible.

Robert B. McCormick 11 East Chestnut St. Bordentown, NJ 08505

DDJ

Why Are So Many People Switching to Smalltalk/V?

Why are scientists, engineers, and professionals switching to Smalltalk/V? Because it lets them do amazing things on their PCs, with a Mac-like interface and an easy-to-use objectoriented language. And with Smalltalk/V you get an unsurpassed array of problem-solving tools. You can even personalize the entire system to suit your needs.

Smalltalk/V is the programmable environment that gives you total control of vour computer and makes it what it was meant to be, a truly personal tool for your mind.

"This is the real thing, folks. A super Smalltalk like this turns your PC into a hot workstation. It's fantastic . . . Highly recommended."


> John C. Dvorak, Contributing Editor, PC Magazine

"My background is in physical chemistry, not in programming. I like Smalltalk/V because I can use objects in the computer to represent objects in the physical world."

Dr. Paul Soper, Senior Specialist E. I. du Pont de Nemours & Co.

"Smalltalk/V is a productive programming environment that allows us to quickly develop sophisticated medical applications."

Dr. Mike McCoy, Dean for Instructional Computing **UCLA School of Medicine**

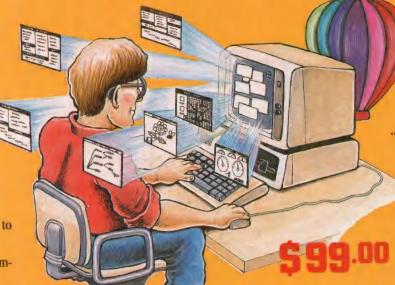

Smalltall

The Programmable Environment

"Smalltalk/V, with its visual interface and class structure, is a perfect way to simulate the complex interactions of natural systems.'

> Lee A. Graham, Research Assistant Institute of Ecology, University of Georgia

"I solve problems quickly using Smalltalk/V because its classes and objects help me organize my thinking. And besides, it's fun to use.'

> Dr. Barry Fishman, Sr. Project Engineer Hughes Aircraft Company

BYTE and BIX are trademarks of McGraw-Hill, Inc. IBM, IBM-PC, and IBM PC-AT are trademarks of International Business Machines Corporation. Unix is a trademark of Bell Laboratories

"Smalltalk/V is the highest performance object-oriented programming system available for PCs."

Dr. Piero Scaruffi, Chief Scientist, Olivetti Artificial Intelligence Center

"Smalltalk/V is an excellent buy and makes a good alternative to other programming languages for the development of complex applications."

> Bill Wong, Director, PC Labs PC Magazine

Other Smalltalk/V **Features**

- Object-oriented Prolog integrated with the Smalltalk environment
- Supports exploratory programming and prototyping
- Class hierarchy with inheritance creates highly re-useable source code
- Smalltalk source code included, with browser windows for easy access and modification
- Object-swapping creates a virtual memory on hard or RAM disk
- Bit-mapped graphics with bit and form editors
- A sophisticated source-level debugger
- Automatic change log for easy recovery from errors
- Powerful directory/file browser system for organizing DOS files
- Access to other languages and DOS functions
- 500 page manual with comprehensive tutorial and reference sections
- Optional add-on modules
 - · RS-232 communications interface with UNIX™ and TTY windows
 - · EGA color graphics
 - · "Goodies" diskette, including multiprocessing, music, zoom, object loader, and more

Vest	I wa	ent to	turn	my	PC	into	2	hot	workstation!	Send	me .	

Smalltalk/V-The Programmable Enviro	onment \$99
Communications Option	\$49
EGA Color Option	\$49
"Goodies" diskette	\$49
Shipping and Handling	
CA residents add applicable sales tax	<u> </u>
TOTAL	\$
Shipping and Handling	
U.S., Canada, Mexico	\$ 5.00
Fleawhore	\$15.00

I enclose □ Check □M	oney Or	der
☐ Credit card information	□ мс	□ VISA
Number:		
Expiration:		
Signature:		
Name:		
Street Address:		
City/State/Zip:		
Phone:		

CIRCLE 127 ON READER SERVICE CARD


NOT COPY PROTECTED, 60-DAY MONEY-BACK GUARANTEE ON-LINE USER-SUPPORT CONFERENCE ON BYTE'S BIX™

Smalltalk/V requires DOS and 512K RAM on IBM PCs (including AT) or "compatibles," and a CGA, EGA, Toshiba T3100, Hercules, or AT&T 6300 graphic controller. A Microsoft or compatible mouse is recommended.

digitalk inc.

5200 West Century Boulevard (213) 645-1082 Los Angeles, CA 90045

VIEWPOINT



Things Computers Can Never Do

Anyone who has witnessed the enormous improvements in computers in the last 40 years may get the impression that computers will eventually be able to solve every well-defined problem. Progress in language understanding and other forms of artificial intelligence has been disappointing, but human language is full of ambiguities, so that's not a well-defined problem. Chess, on the other hand, is very well defined. Although it was once considered the epitome of intelligent activity, computers can now play chess better than all but a few human players.

Some problems, although well defined, are too large to be solved in a reasonable time even on our largest computers. But surely, if a computer could be freed from all limitations on time and memory, couldn't it solve any well-defined problem?

The surprising answer to this question, which was known to mathematicians even before the first real computers were constructed, is no. There are some things no computer can ever do because it can be proved that

by Philip J. Erdelsky

there are no algorithms to do them just as there is no way to square a circle with a compass and straightedge.

These things are not mere mathematical curiosities. They are things that programmers would like to have their computers do for them and

Philip J. Erdelsky, Data/Ware Development Inc., 4204 Sorrento Valley Blvd., San Diego, CA 92121. Philip is a software manager.

things that the suppliers of software development tools would like to incorporate into their debuggers. Computer science curricula usually include the subject of uncomputable functions, but programmers who are not computer science majors sometimes ask for the impossible without realizing it.

Alan Turing in 1935 asked whether there is a method by which a computer program can determine whether any other computer program will halt. This is the famous "halting problem." Turing showed that it has no solution.

A debugger with this ability would certainly be useful. Failure to halt normally is a common form of program failure. Moreover, the debugger could be applied successively to parts of the failed program to isolate the part that is hanging up.

It is not obvious that such a debugger is impossible. Of course, the debugger can't just single-step the program to see if it halts. If the program doesn't halt, the debugger could run forever without determining that this is the case. Or it might give up just as the program is about to terminate, as human programmers sometimes do. At some point, the debugger would have to be able to say, "Aha! This loop is infinite!" It seems as though a cleverly written debugger, having all the tools of modern highlevel languages at its disposal, might be able to do that.

The impossibility proof is based on the following argument. If you have a debugger that can solve the halting problem, given unlimited time and memory, then you can use the same code to make the debugger do other things, some of which are self-contradictory and hence impossible.

The particular computer language is not important. If you can solve the halting problem for one language, you can solve it for another. Just use a compiler or other translation program before solving the halting problem. Notice that translating an assembly-language program to a higher-level language is quite easy, although the object program is bound to be inefficient. The goal, however, is to show that a solution to the halting problem is impossible, not merely

inefficient.

Turing himself proposed a minimal machine that has come to be called the Turing Machine. Its memory was supposed to be infinitely long but only one bit wide, and the machine had only sequential access to it, as with a tape. The programming language was essentially a flowchart, with only a few basic commands. Nevertheless, Turing showed that his machine was able to emulate any other machine, given enough time and a suitable program. Such a construction is not necessary for our purposes—you can imagine that the computer is programmed in some familiar high-level language.

Now consider the problem of determining whether a program can print out a specified string S (with or without other output). If you can solve the halting problem, you can solve this problem. Just replace every print statement in the program with a routine that does not send the output to the printer but keeps track of the output and halts when the string Sappears. Then, to keep the program from halting for any other reason, replace all the halt statements in the program with endless loops. Then solve the halting problem for the result.

Such a program would be useful in itself because many run-time errors produce distinctive messages, and it would be helpful to predict in advance that such errors will occur.

Because this applies to any string S, you can also determine whether a program prints out a copy of itself. This is not as curious as it appears at first glance. It is easy to write a 1,000-character program that prints out all combinations of 1,000 characters including itself. In fact, 1,000 characters is probably an over estimate of the number of characters required in most high level languages.

Now you can write a program to do the following things. First, generate, one by one, all possible programs. The easiest way to do this is to generate all strings and check each one to see whether it is a program. Compilers do this when they check syntax. Then check each program to see whether it prints out a copy of itself.

(continued on page 140)



ONLY ECCELL— THE ECC-PROTECTED MEMORY CARD— CAN KEEP YOU FROM BECOMING THEIR NEXT VICTIM.

If you're a serious AT user, you live in constant fear of seeing this memory error message:

PARITY CHECK 2

That's your friendly AT's way of saying, "All your long hours of hard work just went down the tubes."

About then you start suspecting gremlins in your AT's memory. The fact is, these errors can be caused by a *single* bad RAM bit out of a possible 256 million.* The odds are against you.

Whatever the cause, these memory crashes become more common when you add a lot of AT memory or leave your system on day and night—like you do for network file servers, bulletin boards or host emulation.


*Based on 16 megabytes of RAM.

Now the good news. One memory card offers a solution to this potentially disastrous problem: Orchid's ECCELL." And *only* ECCELL.

KEEP WORKING WHEN THE CHIPS ARE DOWN.

With ECCELL, you're protected against losing all your valuable work due to AT memory crashes. Only ECCELL uses an ECC (Error Correction Code) mechanism to continuously check for errors—and actually correct them before they can do any harm. No other AT memory card does this.

ECC protection has been available on mainframes and minicomputers for years. Now ECCELL brings this sophisticated technology to the AT user.



MANDLE DOS, PROTECTED MEMORY AND EMS.

memory up to 640K. Extended memory that supports protected mode DOS. And expanded memory conforming to the Lotus*/Intel/Microsoft* EMS standard. Plus ECCELL can be used with other AT memory expansion cards.

DON'T PAY EXTRA FOR I/O PORTS YOU DON'T NEED.

If you need to connect more peripherals, ECCELL offers optional serial/parallel or dual serial ports. Unlike other cards, if you don't need them, you don't pay for them.

ADD 3 MEGABYTES OF RAM PER CARD.

Using multiple ECCELL cards, you can install up to 12 Megabytes of ECC-protected RAM. Installation takes only minutes, guided by an intelligent set-up program.

So don't become the next victim of the AT memory gremlins. Protect yourself with ECCELL. Call (415) 490-8586 today. Or contact your local dealer. ECCELL is a trademark of Orchid Technology All other product names are trademarks of their manufacturers.

ORCHID TECHNOLOGY
45365 NORTHPORT LOOP WEST
REEMONT CA 94538
(415) 490-3865 TLX 709289.

ORCHID (EUROPE) LTD.,
UNIT 9A, INTEC-2.
WADE ROAD,
BASINGSTOKE, HANTS,
RG24 ONE.
GREAT BRITAIN:
TL 0256-479998;
TLX 946240.
TLX 936240.

CIRCLE 130 ON READER SERVICE CARD



Pushing the Sound Envelope

by David Levitt

his year heralds an exciting time for music software. Developments during the past few years have pushed the first grand visions of music software enthusiasts rapidly toward reality. Moreover, the wide adoption of MIDI and

These programs make it easier for musical novices to make music.

decreasing hardware costs mean that discoveries move quickly from laboratories into recording studios and homes. In fact, today's music algorithms originate both in research labs and in the dens of readers of journals such as this one.

This article includes a brief history of computers in music and then focuses on recent developments in several areas: MIDI, sampling, transient-oriented synthesis methods such as the Karplus-Strong algorithm, and programs that compose and collaborate on original music.

Ada Augusta's Vision

Countess Ada of Lovelace speculated thus on musical applications of the first computer—Charles Babbage's unfinished Analytical Engine—in the 1840s: "Supposing, for instance, that the fundamental relations of pitched sounds in the science of harmony and of musical composition were susceptible of such expression and adaptations, the Engine might compose and collaborate scientific pieces of music of any degree of complexity or extent."

It took more than a century before Babbage's vision was realized in the first electronic computers; today, after more than 30 years of experiments with computergenerated sound, Ada's vision is finally close at hand. In the interim, "computer music" has taken on the role played by atonal and "experimental" music in the first

David Levitt, 117 Harvard #3, Cambridge, MA 02139. David is a research scientist in the Entertainment Group at the Massachusetts Institute of Technology's Media Laboratory. half of this century.

Timbre

In the 1950s, Max Mathews of Bell Laboratories was among the first to explore the computer as a generator of as yet unheard sounds. At night, Bell Labs' computers became

generalized timbre generators, and Mathews' FORTRANbased MUSIC V language became the first digital signal generation language intended for composers.

Mathews experimented with composing algorithms, too. In one funny piece the computer "interpolated" between two traditional melodies, gradually replacing the notes of one melody with notes from the other. Still, MUSIC V was primarily a timbre-generation language; it wasn't useful to people who wanted to deal primarily with pitch and meter, such as professional composers and musicians who use standard music notation. For decades, MUSIC V and its relatives (including MUSIC 360 and MUSIC 11 from MIT's Barry Vercoe) defined a field by providing semiportable software laboratories for exploring timbre.

Timbre experiments fall into two categories: efforts to imitate (or somehow, improve upon) familiar sounds—for example, the realistic synthetic piano or violin—and efforts to create new kinds of sounds, or transitions between sounds, that are unfamiliar but intrinsically interesting. It was harder than people thought to approximate some natural sounds and not especially easy to build a synthetic orchestra that sounded as good as a real one. On the other hand, the possibilities for new sounds, and pieces based on them, beckoned. Computer music quickly became the new digital branch of electronic, experimental music.

This trend continued into the 60s and 70s when Stanford's Center for Computer Research in Music and Acoustics (CCRMA) laboratory gained prominence. John Chowning, cofounder of CCRMA (pronounced "karma"), showed



that frequency-modulating a simple audio signal with a second signal in the audio band resulted in rich timbres—the idea that became Yamaha's DX/TX FM synthesizers almost 20 years later. More recently, CCRMA scientist Marc LeBrun generalized the FM algorithm, creating a more powerful method known as nonlinear waveshaping. In the 70s, former CCRMA students such as Andy Moorer and F. Richard Moore founded the IRCAM music research lab in Paris, Lucasfilm's audio lab, and University of California at San Diego's computer music program. These groups developed special signal-processing hardware to synthesize timbres quickly, often in real time.

Despite such advances, many people still liked sounds made by banging, plucking, and blowing into physical objects as much as or more than synthetic sounds. This wasn't simply a matter of familiarity or cost; something was missing from most of the synthetic sounds and still is.

Gesture and Graphics

Part of the problem is the absence of gesture. Today's timbre software is best at controlling the loudness, pitch, and timing of a sound *independently* of timbral parameters. In natural instruments, the timbral details are often *nonlinearly coupled* with loudness, pitch, and even timing. How would you describe the different ways and speeds in which a violinist can move a bow? Or the different ways a flautist blows a flute? Most software doesn't try. Not only do most input devices have too few degrees of freedom but also the software doesn't provide easy access to the right parameters.

Other natural instruments have more high frequencies when you strike them harder. So even a percussive instrument such as the piano has a nonlinear, velocity-coupled component that will be missed in a synthetic instrument with a linear loudness model. The gestural subtleties in natural instruments are poorly understood, but evidently they are important to many listeners, and they make it hard for synthetic timbres to compete.

Gesture has always been a central concern for William


Buxton and his students at The University of Toronto. In the 70s, Buxton's lab gained prominence by focusing on the quality of interaction with the computer while making music with it. Buxton's work made extensive use of pointing devices, graphics, and other innovations.

In the same period, Alan Kay's group at Xerox PARC, which also held user interaction sacred, made a music system with FM, graphical timbre design, and simple score editing. This was followed by Mockingbird, an interactive music editing program by John Maxwell III and Severo Ornstein, also from Xerox PARC. Mockingbird allowed users to edit a rough transcription of a keyboard performance with the mouse, using traditional music notation. Its capabilities still exceed those of today's commercial music editing software. Meanwhile, Don Byrd at the University of Indiana produced SMUT, the most versatile program for printing standard musical notation.

Transients

Lack of gesture is only part of the problem with today's synthetic timbres. Most timbre algorithms provide control over the steady-state frequency spectrum of the sound, but that is not the best way to control its subjective effects. Listeners are especially sensitive to transients—short (50 milliseconds or less) periods of sudden change—especially in the initial attack. We have no trouble recognizing a piano on cheap speakers, though most of the low and high frequencies are missing, because the changes in the parts we do hear are correct. In fact, experiments show that, if a steady violin tone is preceded by the attack from a trumpet, most people hear a trumpet. Transients dominate. But traditional timbre creation methods such as additive synthesis (adding up harmonics with different amplitudes) and FM don't provide direct control over them.

In 1983, Stanford student Alex Strong invented a simple method for controlling attack transients. He didn't use the fancy signal processors from up the hill at the CCRMA lab; instead he hunted for a way to make more interesting sounds on his 8080 homebrew computer, the size of a

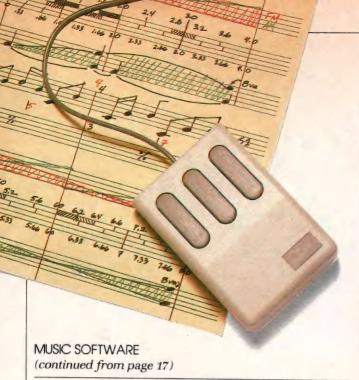

shoebox. He toggled in an 8080 program (the machine had no keyboard), and in real time it generated what sounded just like a plucked guitar string.

Strong teamed up with Kevin Karplus, another Stanford student, to create the Karplus-Strong algorithm and a new approach to synthetic timbre design. The algorithm is simple: one cycle of the sound is stored in a memory buffer and is played repeatedly through a digital/analog converter. The pitch is determined by the size of the buffer and the rate at which samples are played:

pitch=samprate/bufsize

This is the way wave tables work in many simple synthesis programs. But with Karplus and Strong's scheme, each time the waveform is played, a filtered version is computed and stored back where the previous waveform was. Thus the algorithm defines a feedback loop in which a filter is used over and over to transform the waveform data.

If the buffer waveform is initially white noise, and the filter is a simple, first-order low-pass filter, we have Strong's basic guitar algorithm. Intuitively, we see that each time through the loop, more and more of the high frequencies are filtered out, so the sound changes quickly from a sharp scratch to a pure tone at the frequency samprate/bufsize. This is the plucklike guitar attack. Strong implemented the low-pass filter by averaging adjacent samples—simply adding and right-shifting pairs of samples on the 8080—and was able to produce two guitar voices in real time with no special hardware. With slight changes in parameters, the algorithm also produced convincing banjo sounds.

Algorithms such as Karplus-Strong have not yet been fully explored. Still, the essential idea is important: designers can gain control over the attack and other transients by creating a filter that describes relative rates of change in the sound's frequency components. A low-pass filter in the feedback loop means the higher frequencies

fade, as in a "pluck" attack; a high-pass filter means the higher frequencies grow, as in a horn or other brass instrument attack. (I am not aware of attempts to produce brass sounds with Karplus-Strong; this is a research topic.)

So, timbre designers are still learning new ways to create synthetic sounds that listeners find realistic or appealing. Some day we may yet have synthetic sounds that unquestionably improve on their physical predecessors.

Sampling

Until then, we're being rescued by falling memory costs. If we can't easily improve on natural sounds, we can record them into digital samples, then resample (scale the frequency) and loop, playing them back with a different pitch, loudness, and duration. The digital recording means the whole sound—including transients—is faithfully captured. We still have to account for nonlinear scaling, usually by recording several samples over a range of pitch and loudness values. To make an instrument based on a human voice, for example, we sample several voices in different ranges; then when we play a high note, it will sound like a soprano, not like Alvin the Chipmunk.

Sampling memory is at the heart of the Kurzweil, Emulator II, Prophet 2000, and many other recent synthesizers; the samplers are sure to decrease in cost and increase in popularity. Today 8-bit samplers are available for less than \$2,000. Within a few years the 16-bit, 44.1-kHz per channel format used in audio compact discs is likely to become the standard for computer sound sampling, too.

MIDI

Of all these innovations, the introduction of the MIDI (Musical Instrument Digital Interface) standard in 1984 is having the greatest effect on modern music software. MIDI has several limitations, covered in more detail in Mark Gavin's MIDI article in this issue, but the very existence of an interface standard has helped programmers focus on issues that are independent of the synthesis technology—that is, on music composition and user interaction rather than timbre design.

On the plus side, MIDI has the necessary rudiments for gestural control: velocity and aftertouch for keyboard instruments and other linear control options (for example, for pedal and breath control). MIDI even includes space for instrument makers to invent their own new codes. MIDI's demerits include no standard codes for polyphonic pitch bending (so most MIDI synthesizers have a fixed chromatic tuning) and a 31.25-kilobit/sec data rate that is simply too slow for some dense polyphonic pieces.

Despite its flaws, MIDI is making event-level recording and computer control the rule rather than the exception in new instruments. Companies such as Yamaha have even begun to include MIDI outputs in their acoustic pianos.

This means a welcome end to computer music, which we needn't distinguish from "real" music for much longer. Presumably other media suffered an early period in which the technology was so peculiar it dominated the perceptions of both artists and audiences. Still, we don't consider the hardcover novel a separate art form, and it's hard to imagine a book so dull that our first comments would be about the paper it's printed on. Now that virtu-

ally every music studio has a MIDI synthesizer and will soon have a computer, computer music will fade into the past and innovative composers will find new ways to distinguish themselves. Thus MIDI is nudging us nerds away from timbre design and toward composition software —the rhythm, melody, and harmony problems that have remained the backbone of music theory, the music business, and musical communication.

Algorithmic Composition

The rest of this article touches on the current state of this exciting musical field: representing the knowledge of the composer and improvisor in software. This is what the countess dreamed of when she wrote that "the Engine might compose and collaborate scientific pieces of music..." Algorithmic composers write programs that determine what notes to play and when. This has little in common with timbre design; algorithmic composers might even dislike synthetic timbres, preferring to print the scores their programs generate so they can be read and performed on natural instruments by human musicians. Thus, algorithmic composers are a small, almost separate subculture of music programmers—often working independently in the same laboratories as their timbral counterparts.

I have been writing programs that improvise jazz and arrange a melody in a given musical style for about ten years. My graduate work in the MIT Artificial Intelligence Lab entailed writing LISP programs that represent chords, melodies, and relationships between them—much as I do when I improvise jazz, invent a new exercise, or solve a musical problem at the piano. I have developed style templates that use a given melody and chord progression and create simplified parodies of bass players, bebop, ragtime, and New Orleans jazz ensemble improvisation.

Others in the field include Fry, who also wrote jazz improvisation programs at MIT. His most advanced programs could write an additional chorus for John Coltrane's famous Giant Steps solo or Iron Butterfly's "In a Gadda da Vida." David Wessel, now in Paris at IRCAM, writes programs that produce convincing, often overimaginative, blues solos. Peter Langston of BellCOR has produced three-part rock harmonies and pieces based on organic "growth" algorithms.

Laurie Spiegel was a composer/scientist in Max Mathews' area at Bell Labs and today makes her living as a composer in New York City. Her programs reflect her interest in folk melodies and traditional harmony. Spiegel's programs are sufficiently subtle and musical that people assume her pieces weren't written with a computer.

Bill Schottstadt developed the Pla composing language at CCRMA, where he and others use it for algorithmic composition of relatively traditional pieces. For instance, when CCRMA student David Jaffc extended the Karplus-Strong algorithm to simulate a particularly realistic banjo and guitar, he used Pla algorithms to build a parody of Kentucky bluegrass arpeggios in an arrangement he called "Silicon Valley Breakdown."

Roger Dannenberg of Carnegie Mellon University has been pioneering a different area: software that accompanies a live performer, following the tempo and playing all the other parts. Barry Vercoe and Miller Puckette of

MIT have a similar program, which also learns to anticipate the performer on subsequent rehearsals.

In short, we are seeing a renaissance of knowledge-based music composition and collaboration software. Although most of these projects are based in university research labs, the software can also run on personal computers. For instance, we have several such programs running on the Macintosh at the MIT Media Lab. Moreover, several algorithmic music software titles have appeared on the market in 1986 and 1987.

In Laurie Spiegel's Music Mouse for the Macintosh, a performer controls the overall motion of up to four voices using the mouse, while the program fits the performer's gestures into a selected scale (for example, Major, Pentatonic, or Middle Eastern). Notes are also constrained to change only on metrical time boundaries, so every gesture is automatically both tonal and rhythmically "musical." Typewriter keyboard switches provide control over a range of other musical parameters.

In Bob Campbell's Instant Music for the Amiga, the performer can control pitch with the mouse while seeing harmonic and rhythmic information on the screen. Important harmonic relationships are indicated cleverly by color. In one mode, you collaborate with the computer on a lead line: you control pitch while the program controls rhythm. When your ideas conflict, you can hear and almost feel the tension—again without losing "musicality."

David Zicarelli's Jam Factory, also for the Mac, segments your MIDI performance into phrases and plays them back—either with new accents or stochastically scrambled (using a Markov algorithm) into a sort of musical wall-paper that's like what you played. For each of up to four performances, you control about a dozen playback parameters with the mouse and can play along with them.

Zicarelli also contributed to Joel Chadabe's M, an interactive composing and performing system. Chadabe has been making composing algorithms for years; I haven't had a chance to try his program yet.

Most of these programs make it much easier than ever for musical novices to make a piece of music that sounds good. The knowledge in the program provides a substitute for musical virtuosity. As computer scientist Alan Kay likes to ask: Is it an intelligence amplifier or just a prosthetic? To the author of the program, it's an amplifier; she or he already knows the musical concepts and is controlling them with greater leverage. For some users, it might be a crutch; but programs that provide graphic or other feedback can show novices what the computer is doing and what knowledge it is using. Then the programs can be more like "training wheels," temporary stabilizers that can eventually come off. Ultimately, users themselves will decide.

Notes

1. Robert Taylor, ed., Scientific Memoirs, Vol. III: Ada Augusta, Countess of Lovelace (Johnson, 1943).

DDJ


Vote for your favorite feature/article.
Circle Reader Service No. 2.

Gold Hill delivers Gold Works.

Now you can build and deliver serious expert systems on advanced PCs.

Introducing GoldWorks, formerly code-named Acorn.

GoldWorks is Gold Hill's premiere product for serious expert system building on 286- and 386-based PCs. It's designed for professional software developers who need to integrate expert systems with conventional applications running on conventional hardware. And it combines the best features of high-end expert system tools into a new standard for expert system development and delivery on advanced PCs.



GoldWorks is the most comprehensive expert system tool available for advanced PCs.

Works like a shell.

GoldWorks gives you the best features of an expert system shell. With the easy-to-use menu interface, you can rapidly prototype and build expert system applications without knowing the underlying programming environment. And you get the GoldWorks tutorial, the San Marco LISP Explorer® tutorial, an on-line help system, and example applications to get you started quickly.

Works like a toolkit.

GoldWorks gives you the best features of an expert system toolkit. You can access the underlying pro-

gramming environment to extend and customize the system for your specific applications. And you can address up to 15 MB of extended memory on the PC AT (and even more on 386-based PCs).

Works like expert system tools previously available only on high-end workstations . . . at a fraction of the cost.

GoldWorks sets a new standard for expert system development and delivery on advanced PCs. You get frames with multiple inheritance for flexible knowledge representation. Rules supporting integrated forward and backward chaining for powerful inferencing. Object programming for developing modular applications. Plus advanced features for controlling the inferencing process, including rule sets, sponsors, rule priorities, certainty factors, and extensive rule inspecting and debugging facilities. All on conventional hardware the PC you already use.

Works to develop <u>and</u> deliver your expert systems.

GoldWorks is the only tool that lets you develop and deliver serious expert systems on PC ATs. And GoldWorks also takes advantage of PCs based on Intel's powerful 80386 processor, including the COMPAQ DESKPRO 386 and Gold Hill's 386 LISP System.

Works to integrate expert systems with conventional PC applications.

With **GoldWorks**, you can integrate expert system applications with dBASE III and Lotus 1-2-3 . . . integrate C routines and libraries into your expert systems . . . and build and deliver expert systems in network environments.

Works the way you want an expert system builder to work.

GoldWorks from Gold Hill sets the standard by which all other expert system tools will be measured. It was extensively field-tested by developers in dozens of major corporations. And GoldWorks is backed by Gold Hill's comprehensive customer support, training and consulting programs.

Now you have the expert system builder that works the way *you* want to work—GoldWorks. To see how it works, order our unique Demonstration Kit, including full color video and complete User's Guide. It's only \$49 postpaid, refundable with your GoldWorks purchase. To order, call toll-free:

1-800-242-5477. In Mass., call (617) 492-2071.

GoldWorks from Gold Hill. The expert in AI on PCs.

Gold Hill Computers, Inc. 163 Harvard Street Cambridge, MA 02139

GOLDHIL

© Copyright 1987, Gold Hill Computers, Inc. Gold Hill, GoldWorks, GCLISP, and 386 LISP System are trademarks of Gold Hill Computers, Inc. San Marco LISP Explorer is a registered trademark of San Marco Associates. Lottus is a registered trademark of Lotus Development Corporation. dBASE is a trademark of Ashton-Tate. IBM and IBM PC-AT are registered trademarks of International Business Machines Corporation. Intel is a registered trademark and 80286 and 80386 are trademarks of Intel Corporation. COMPAQ and DESKPRO 386 are trademarks of COMPAQ Computer Corporation.

Designing a Music Recorder

by Mark Garvin

magine designing products for a changing microcomputer market without hardware and software standards. Standard architectures such as IBM PCs and Apples have led to a proliferation of new microcomputer products, and the development of MIDI (Musical Instrument Digital Interface) has resulted in a similar revolution in the music industry. By providing common ground for communication, MIDI allows software engineers and musicians to access a wide range of synthesizers, computers, and musical controllers.

MIDI has become virtually uncontested as a means to link synthesizers and computer equipment and is now finding acceptance in many related industries such as lighting control, film editing, and automated audio mixing. By supporting real-time access to so many devices, MIDI has opened new dimensions for recording, composition, and live performance. Now musicians can generate orchestral scores with banks of rackmounted synthesizers, coordinate sound and visual effects, and even transmit stored musical data over phone lines.

In this article I outline several applications of MIDI and I suggest several ways to get started writing your own MIDI software. I have listed some of the current products and manufacturers, but these listings are by no means complete. They are given only to provide a starting point for obtain-

Mark Garvin, Xymetric Productions, 211 W. Broadway, New York, NY 10013. Mark has worked in both music and electronics for 15 years. He recently designed an eight-port MIDI controller that runs on the IBM PC/AT. Here are ways to get started writing your own MIDI software.

ing additional information.

Overview

The MIDI specification has remained reasonably intact since it was first proposed by synthesizer manufacturer Sequential Circuits in 1982. It is sufficiently specialized to handle most direct musical communication, yet its generality has allowed it to adapt to applications that were not foreseen when it was originally drafted.

MIDI entails both a hardware and a software specification: the hardware consists of a relatively fast optically isolated serial loop with separate cables for send and receive; the software provides detailed methods for transmitting note-control data and looser specifications for handling interaction between products from different manufacturers. MIDI works in much the same way as an RS-232 modem protocol, but it is optimized for musical data. Modern MIDI record/ playback systems could be regarded as a type of multiprocessor network because an intelligent master (keyboard or computer) controls a series of devices, each with its own onboard intelligence.

MIDI commands include NOTE-ON and NOTE-OFF, response MODE for filtering received signals, REAL-TIME messages for coordinating events, and SYSTEM COMMON and EXCLUSIVE

commands for setting up songs or addressing a particular brand of synthesizer. This simple instruction set allows enough flexibility to accommodate most synthesizer architectures while providing much needed universal music commands. As more manufacturers have realized the advantages of communicating with a wide array of musical equipment, MIDI's popularity has mushroomed. Few synthesis instruments are sold today without MIDI interfaces.

All MIDI documentation is now handled by the International MIDI Association (IMA). (See the box on page 48.)

Products

Fortunately, the high level of competition among musical instrument manufacturers has been offset by specialization: small companies can offer transmit-only devices, such as high-quality keyboards with no sound output, or receive-only devices, such as sound generators that respond only to MIDI input. Undoubtedly, the broadest new field is that of software-based controllers. These usually connect between a keyboard (or other source) and a sound generator, where they monitor and control MIDI communication. Some of the newer MIDI-based products include guitar, voice, and even xylophone-to-MIDI converters (Roland, Fairlight), software-hardware retrofits for playing digitized notes from personal computers (Hybrid Arts), MIDI-controlled reverb and echo units (Lexicon, KORG), and MIDI-controlled audio mixing consoles (AKAI).

Synthesizers

Early synthesizers—used for scoring

so many old science-fiction movies were assembled from several modules that were interconnected manually by patchcords. These and other voltage-controlled instruments have now attained a certain vintage status.

New instruments use computerized signal routing, and modern sound-generating techniques range from additive synthesis (Kawai), FM synthesis (Yamaha), and phase-distortion synthesis (Casio) to actual digital recording, or sampling, of natural sounds (Sequential Circuits, E-Mu, Kurzweil).

Additive synthesis uses the addition of several sine-wave components to produce an output waveform. Theoretically, any waveform can be broken down into sine-wave components by using a process known as Fourier analysis. It follows, then, that any waveform can be recreated by adding these same sinewave components. In actual application, the process is not so simple; the human ear quickly becomes bored with the static, or unchanging, waveform that is created. It is this static characteristic of early synthesizers that contributed to the stereotyped monotonous or bland sound.

The waveforms generated by traditional acoustic instruments change as notes are being played, so recreating the natural timbres of these instruments requires real-time control over the amplitudes, or envelopes, of the sine-wave components. In early synthesizers, this was approximated by the use of an envelope generator that cycled through Attack-Decay-Sustain-Release (ADSR) states in response to key-down and key-up events. Patching the ADSR generator into voltage-controlled filters and voltage-controlled amplifiers provided a primitive level of control over the harmonic structure of the waveform. Newer machines sometimes use a separate programmable envelope for each sine-wave component of the waveform. With sufficient control of the amplitudes, any conceivable sound can be recreated without having to use digitized wave samples. This is the objective of the resynthesis or adaptive synthesis machines, such as Roland's digital piano.

FM synthesis uses a limited number of sine-wave oscillators with individual envelopes, so in this respect it

bears some resemblance to resynthesis methods. One significant departure is in the way the oscillators are configured: different algorithms can be chosen to allow oscillators to intermodulate, creating rich and sometimes enharmonic frequencies. The resulting output can range from clangorous-sounding bells to human-sounding voices, but FM machines are relatively unpredictable and difficult to program.

Phase-distortion synthesis involves scanning a simple (usually sine) wave

MIDI works
in much
the same way
as an
RS-232
modem protocol.

and varying the scan rate as the wave is being replayed. In other words, the leading edge of the sine wave can be scanned rapidly so it appears to be a nearly vertical edge; the trailing edge can be scanned more slowly so it has a tapered slope. The resulting sawtooth waveform is much richer in harmonics than the flute-like sine wave. Dynamic variation of the scan rate can change the shape and timbre of the waveform as a note is being played.

Some of these methods of sound generation may seem to make the use of waveform sampling unnecessary, but in fact samplers can usually do much more than recreate natural sounds. For example, precise (up to 16-bit) digitizations of orchestras, drums, waterfalls, or human voice can be altered and played back at any pitch. The elite of the sampling synthesizers (Fairlight, New England Digital) can cost hundreds of thousands of dollars, but they eliminate the need for a lot of expensive equipment in a recording studio. New England Digital even advertises a tapeless studio that records audio tracks directly to a high-capacity hard disk.

Optical Media offers prerecorded sound libraries on CD ROMs. Such systems are becoming more affordable as the cost of mass storage continues to drop.

Patch Editors and Librarians

These diverse methods of sound synthesis have introduced a new class of problems: a few potentiometers on a front panel are no longer sufficient to program (that's right, program) a synthesizer. One manufacturer claims that, if all of its front-panel functions were to be made available at once, its synthesizer would be 17 feet long. Instead of overlaying the limited set of front-panel controls with multiple modes, synthesizer front-panel functions can usually be accessed by sending a special set of MIDI SYSTEM-SPE-CIFIC commands from a computer outfitted with MIDI ports.

Synthesizer programming has be-

come an art in the same sense as actual performance of music, and album covers frequently give credit to sound programmers, even if they do not perform on the album. The sound programs, which can make or break the sound of a synthesizer, are known as patches. Good programmers frequently make a living solely by selling their patches, either in the form of instruction sheets that simply explain how to recreate the original sounds or in a downloadable binary form on floppy disks. Diskbased systems require the use of a patch librarian program to organize and access patch files. Most patch librarians allow two-way communication between the synthesizer and computer, so patches can be sent to a synthesizer, modified with the use of the synthesizer's controls, and sent back to be archived on disk. Some sophisticated librarians (Voyetra) can handle several different types of syn-

Patch editor programs differ from patch librarians in that they can actually alter the sound of a patch. Just as the term implies, MIDI system-specific messages usually are specific to a certain brand and type of synthesizer, so most patch editors are designed to work with only one or two types of machines. The system-specific messages that are sent by these edi-

thesizers or even download rhythm


to

patterns

machines.

electronic drum

If lightning still scares you, you're using the wrong file manager.

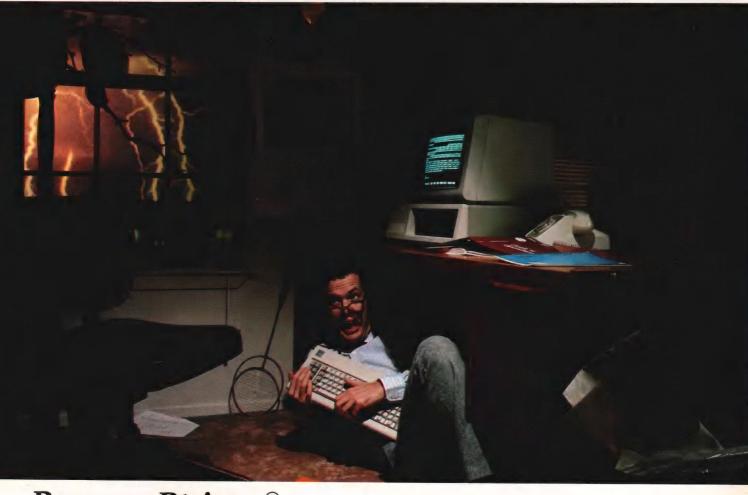

Be sure. Btrieve.®

Lightning may strike. But it doesn't have to destroy your database.

Btrieve® file management offers automatic file recovery after a system crash. So accidents and power failures don't turn into database disasters. Your Btrieve-based applications will come up when the lights come back on.

Fast. Btrieve is lightning fast, too. Its b-tree file structure automatically balances—you never waste time reorganizing the index. And Btrieve is written in Assembly language especially for the IBM PC. The result: electrifying speed on file maintenance routines. Applications that run fast. Users who don't waste time waiting.

The standard for networking. When your application requires multi-user file sharing, Btrieve (network version) sets the standard for the industry's most popular LANs: Novell, IBM, and 3COM, to name a few. Btrieve offers safe multi-user file management that

coordinates simultaneous updates and protects against lost data.

Fully-relational data management. Using SoftCraft's entire family of products gives you a complete, fully-relational database management system. Xtrieve® speeds users through database queries with interactive, onscreen menus—no command language or special syntax. And you can add our report writer to Xtrieve to generate the reports you need.

For professional programmers. Btrieve is the fast, reliable answer for all your application development. In any development language—BASIC, Pascal, Cobol, C, Fortran and APL. With multikey access to records. Unlimited records per file. Duplicate, modifiable, and segmented keys. Variable length records.

With Btrieve, you can develop better applications faster. And know they'll be safe if lightning strikes.

NO ROYALTIES

Suggested single/multi-user prices: Btrieve: \$245/\$595 Xeporter: \$145/\$345 Requires PC-DOS or MS-DOS 2.X or 3.X.

Btrieve and Xtrieve are registered trademarks of SoftCraft, Inc.



P.O. Box 9802 #917 Austin, Texas 78766 (512) 346-8380 Telex 358 200



Fast, Free Product Info

Take this card with you as you read through this issue of Dr. Dobb's.



Title _ Phone Company -Address -

City/State/Zip. May 1987 #127 Expiration Date: August 31, 1987

Please circle one letter in each category:

- I. My work is performed:
 - A. for in-house use only B. for other companies.
 - for end users/retailers
 - D. in none of the above areas.
- II. My primary job function:
 A. Software Project Mgmt/Spvr
 B. Hardware Project Mgmt/Spvr
 C. Computer Consultant
 D. Corporate Consultant
 E. Other

III. My company department performs:

- A. software development
 - B. computer system integration.
 - computer manufacturing.
- E. computer research. F. none of the above.

IV. This inquiry is for:

- A. a purchase within 1 month.
 B. a purchase within 1 to 6 months.
- C. product information only.

V. Corporate Purchase Authority:

- A. Final Decision-maker B. Approve/Recommend C. No Influence

VI. Personal Computer Users at my

- Jobsite: A. 10,000 or more B. 500 to 9,999
- C. 100 to 499 D. 10 to 99
- E. less than 10

VII. On average, I advise others about computers:

- A. more than once per day.
 B. once per day.
 C. once per week.
 D. less than once per week.

VIII. In my job function, I:

- A. design software and/or write code
 B. design software.
- design software.
- C. write code.

 D. don't design software or write code

	1	2	3	4	5	6	7	8	9	10	
	11	12	13	14	15	16	17	18	19	20	
	21	22	23	24	25	26	27	28	29	30	
	31	32	33	34	35	36	37	38	39	40	
	41	42	43	44	45	46	47	48	49	50	
	51	52	53	54	55	56	57	58	59	60	
	61	62	63	64	65	66	67	68	69	70	
	71	72	73	74	75	76	77	78	79	80	
	81	82	83	84	85	86	87	88	89	90	
	91	92	93	94	95	96	97	98	99	100	
•	_	102	103	104	105	106	107	108	109	110	
	101	112	113	114	115	116	117	118	119	120	
	111	122	123	124	125	126	127	128	129	130	1
		132	133	134	135	136	137	138	139	140	1
	131	142	143	144	145	146	147	148	149	150	1
	141			_	155	156	157	158	159	160	1
ı	151	152	153	154	165	166	167	168	169		١
l	161	162	163	174		176	177	178	179	180	1
l	171	172	173	184	185		187	188	189	190	1
	181	182	183	194			197	198	199		1
١	191	192	193		_		_	_	_		1
١	201										١
١	211										1
	221										١
	231										1
	241	242	2 243			-		_	_		٦
	25	252	2 253								١
	26		2 263								١
	27	1 27									-
	28	1 28									
	29	1 29	2 29	3 29	4 29				_		-
	30	1 30	2 30	3 30							
	31				4 31					9 320	
	32			3 32	4 32					9 330	
	33			3 33	4 33						
	34				4 34	5 34	6 34	7 34			_
	-	_	_	3 35	4 35	5 35					
	35		32 36		34 36	35 36	36 36	37 36			
	36		72 37			75 37	76 37	77 37		79 380	
	37						36 38			89 390	
	38		92 3	93 3			96 39		98 3	99 999)
	3	31 3	32 3	-		_					

be received by their own revision number, system version number, or specified date.

* Efficient disk storage. PVCS uses a very intelligent difference detection technique that minimizes the amount of disk space required to store a new version.

PVCS Maintains System Integrity

PVCS prevents system corruption that could ordinarily result from security breaks, user carelessness or malfunctions. The levels of security can be tailored to meet the needs of your project.

ners most of the power and flexibility of the Corporate PVCS, but excludes the features necessary for multiple-programmer projects.

Corporate PVCS — Offers additional features to maintain source code of very large and complex projects that may involve multiple programmers. Includes "Branching" to effectively maintain code when programs evolve on multiple paths (e.g., new versions for different systems, or a new program based on an existing program). Single user.

Network PVCS — Extends Corporate PVCS for use on Networks. File locking and security levels can be tailored for each project. 5-Station License \$1,000. Call (503) 645-1150 for pricing on Licenses for more than 5 Stations.

TO ORDER: VISA/MC 1-800-547-4000, Dept. No. 325. Oregon and outside US call (503) 684-3000. Send Checks, P.O.s to: POLYTRON Corporation, 1815 NW 169th Place, Suite 2110, Dept. 325, Beaverton, OR 97006.

High Quality Software Since 1982

(continued from page 23)

tors are prefixed by an address code that tells other types of machines to ignore the data that follows, so patches can be sent to one device in a MIDI network without problems resulting from other machines misinterpreting the data. System-specific codes are usually published along with other technical data in a synthesizer's instruction manual.

Some vendors, such as Bacchus Software, specialize in patch editor programs. Bacchus' IBM PC-based editor is a SideKick-style memory-resident program that pops up over another running music program. Its main function is editing and archiving patches for the popular but difficult to program Yamaha DX-7 synthesizer. It is usually in the best interests of manufacturers to either write their own micro-based editors or to hire third-party software writers to support their products. For example, DigiDesign's waveform-editing programs allow data to be downloaded from sampling synthesizers, displayed, altered, and sent back to a sampler to be played. They support several brands of synthesizers, and manufacturers value their support because they make the samplers much more accessible and marketable. Some manufacturers even feature DigiDesign's software in their own ads and exhibits.

Sequencers

One of the many advantages MIDI affords is the ability to intercept and record musical events. The recorded data can be manipulated in ways that were impossible using standard audio tape recorders. Transposition (pitch shift), copying, and rearranging can be accomplished with software alone, and errors made during the recording process can be corrected without having to do retakes. Compositions can even be replayed while changing synthesizer patches, so a part that was originally written for a cello-type voicing could be tried out with a piano sound.

MIDI-based recorders or composition programs are sometimes known as sequencers (a carry-over from old analog instruments). In the modern context, a sequencer might be visualized as being much like an audio tape machine. Concepts such as multitracking, fast-forward, and rewind can be translated to software to ease the transition from conventional tape-oriented studios. New concepts such as quantization (automatic timing correction), real-time transposition, and complex looping constructs would be nearly impossible with the use of audio tape alone.

Sequencers are currently available for the IBM PC (Jim Miller, Voyetra), Macintosh (Southworth, Mark of the Unicorn), Amiga (Mimetics), Atari ST (Hybrid Arts), and Commodore-64 and Apple II (Doctor T, Passport). One of the original entries in the IBM field is Jim Miller's Personal Composer, which can record a performance in real time or let you enter data with a mouse or keyboard. Musical data can then be rearranged and edited using traditional staff-line notation and scores can be printed on common dot-matrix printers. Personal Composer includes a built-in patch editor for DX-7 synthesizers, a small graphics editor, and even a user-accessible LISP interface.

Personal Computer Interfaces

If you already own one of the computers mentioned, getting started in MIDI composition is as simple as purchasing the standard interface. You will then have access to a broad range of software packages that you can expand and update via disk (just like you do compilers and word processors). Some of the more common interfaces come from Passport (Commodore-64 and Apple II), Opcode (Macintosh), Mimetics (Amiga), and Roland (IBM PC and Apple II). The Atari ST series has a built-in MIDI interface. Most of these interfaces consist of little more than a UART for handling serial communication. The Roland MPU-401, however, includes an on-board microprocessor and timer for providing you with preprocessed, buffered data packets.

What MIDI Does (and Doesn't Do)

First of all, MIDI does not solve all existing problems in interfacing sound-generating equipment. For example, it is easy to send instructions for turning particular notes on and off, and sending a NOTE-ON command usually

results in a predictable pitch from any two synthesizers. There is no standard for a violin sound or an oboe sound, however. Patches that are stored internally in the synthesizer can be requested via MIDI, but it is up to the individual programmer or manufacturer to devise the violin or oboe sound and assign a patch number to it. Manufacturers of lighting controls or mixing boards are on their own; system-specific commands tell other devices to ignore codes they won't understand, but there is no standard spec for how lights should respond to music commands.

Some parameters are standardized by MIDI-for example, voice messages include NOTE-ON and NOTE-OFF events. Notes are assigned numbers from 0-7fh and simply turned on and off. Velocity information is included with the command and can be interpreted as loudness. Channel addresses designate a particular oscillator or synthesizer that will respond to the command-bytes from 90h to 9fh turn on notes for channels 0-0fh; bytes from 80h to 8fh turn the same notes off. For example, the 3-byte command to turn on note number 32h, on channel 3, at velocity 22h is 93h, 32h, 22h; the command to turn off the same note with a turn-off velocity of 10h is 83h, 32h, 10h, Velocity is usually not relevant when turning a note off, so sometimes a NOTE-ON command with a velocity of zero is used as a NOTE-OFF. Other voice commands include key pressure and pitch bend, but these are not sent as part of the NOTE-ON or NOTE-OFF message packets.


MODE MESSAGES control the response characteristics of the receiving device. Synthesizers can be told to listen to a specific channel (OMNI-OFF) or to respond to messages on all channels (OMNI-ON). In addition, provision is made to address one oscillator per channel (MONO MODE) or to allow the synthesizer's internal software to assign its own voices so messages can be sent over one channel (POLY MODE). Combinations of these yield four modes.

SYSTEM-REAL-TIME and CLOCK MES-SAGES allow synchronization of all machines in the chain by sending a periodic software clock tick over the MIDI bus.



Fast, Free Product Info

Take this card with you as you read through this issue of Dr. Dobb's.



A reader service number appears on each advertisement.	Circle the	e
corresponding numbers at right for more info. Circle 999	to start a	a
12 month subscription at the price of \$29.97		

Name	
Title	
Company	Phone
Address	
City/State/Zip	
May 1987 #127 Ex	piration Date: August 31, 1987
Please circle one letter in	each category: V. Corporate Purchase Authority:

- I. My work is performed:
 - A. for in-house use only. B for other companies.
 - C. for end users/retailers.
 - D in none of the above areas
- II. My primary job function:

 A. Software Project Mgmt/Spvr
 B. Hardware Project Mgmt/Spvr

 - Computer Consultant D. Corporate Consultant
- III. My company department
 - A software development
 - B. computer system integration
 - D. computer consulting
- F. none of the above.
- IV. This inquiry is for:
 - A. a purchase within 1 month B. a purchase within 1 to 6 months. C. product information only.
- performs:
 - A. more than once per day. B. once per day.
- C. once per week. C. computer manufacturing. D. less than once per week
 - computer research. VIII. In my job function, I:
 - A. design software and/or write code

A Final Decision-maker

C. No Influence

A. 10,000 or more

B. 500 to 9,999

C. 100 to 499

10 to 99

E. less than 10

computers:

Jobsite:

B Approve/Recommend

VI. Personal Computer Users at my

VII. On average, I advise others about

- B. design software. write code.
- D. don't design software or write code

- 14 15 16 12 25 26 27 37 35 36 75 76 73 74 84 85 86 87 92 93 94 95 96 101 102 103 104 105 106 107 108 109 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140
- 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200
- 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250
- 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300
- 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350
- 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390
- 391 392 393 394 395 396 397 398 399 999

Fast, Free Product Info



BUSINESS REPLY MAIL

FIRST CLASS PERMIT #217, CLINTON, IOWA

POSTAGE WILL BE PAID BY ADDRESSEE

Dr. Dobb's Journal of Software Tools

P.O. Box 2157 Clinton, Iowa 52735-2157 NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES





Take this
card with
you as you
read through
this issue of
Dr. Dobb's.



Clarify and document your source listing and get an "organization chart" of your program's structure

with two NEW utilities from Aldebaran Laboratories, for C. BASIC, d-BASE.® Pascal and Modula-2 programmers.

"Occasionally, a utility comes along that makes a programmer's life much easier. SOURCE PRINT is such a program. It contributes to the programmer's job by organizing code into a legible format and by helping to organize the documentation and debugging process."

- PC Magazine Sept. 16, 1986

Source Print and Tree Diagrammer both have easy-to-use menus with point-and-shoot file selection, and let you search for files containing a given string. For IBM PC and compatibles with 256K.

Ioin thousands of programmers who are working more efficiently using Source Print and Tree Diagrammer. Order these indispensable tools today. We ship immediately, and there's no risk with our 60-day money-back guarantee. Order both and save. Only \$125.00.

800-257-5773 Dept. 55

800-257-5774 Dept. 55

MasterCard, VISA, American Express, COD. Add \$5 for shipping/handling.

Source Print and Tree Diagrammer are trademarks of Aldebaran Labs. dBASE is a trademark of Ashton Tate. Prices subject to change without notice.

Source Print™

organizes your source code, simplifies debugging, and makes documentation a snap! It lists one or more source files with informative page

headings and optional line numbers, while offering invaluable features:

The Index (Cross-Reference

list) saves you time by showing exactly where variables are

used and where functions, procedures, and routines are called.

Before (iar < nres && ares[iar][0] == [if ((d = ares[iar][1]) == 0) -{
 p = &(ares[iar][1]);
 while (d = *p)

BASIC After

	43=1820			
intext	4.193	9=395 45=1902	43.1796	43.1815
ins	53.2293 54.2331 54.2354	53=2309 54.2332 54.2364	53=2319 54.2336 54.2365	53.2325 54=2346 54.2366
inrecord	4.191 21.889 23.990	9=396 22.922	19.825	19=826 23=978

Locations where new values may be assigned to

variables are shown, making it easy to track down that mysterious value change.

Structure Outlining solves the problem of hard-tosee nested control structures by automatically drawing lines around them.

Automatic Indentation of source code and listings reduces your editing time and ensures indentation accuracy.

Plus... Source Print generates a table of contents listing functions and procedures. Keywords can be printed in boldface on most printers. Multi-statement BASIC lines can be split for readability. Functions and procedures can be drawn by name from one or more source files to form a new file.



Y


Co

A Ci

Tree Diagrammer

shows your program's overall organization at a glance. Ordinary program listings merely display functions, procedures, and subroutines sequentially, but do not display the relationships between these routines. Our revolutionary new Tree Diagrammer automatically creates an "organization chart" of your program showing the hierarchy of calls to functions, procedures, and subroutines. Recursive calls are indicated and designated comments in the source code will appear on the chart.

Tree Diagrammer helps you organize your program more logically. And you'll be amazed at how easy it is to debug when you see how your routines interact.



Aldebaran Lab	oratorie	s 3339 Vince	nt Rd. Pleasant Hill, (CA 94523 415-930-	8966
YES! Rush Both \$125. Ship/	n me□ Handling\$	Source Print @ \$ 5. For CA add 6%	375 🗆 Tree	Diagrammer @ \$55 Total	
Name Company					
Address			State	Zip	
Card #	□VISA	☐ MasterCard	American Express Exp. Date		
Signature			Phone #		55

(continued from page 26)

SYSTEM-SPECIFIC commands address synthesizers from a specific manufacturer. These commands are used to send patches and other data that has meaning only to certain types of synthesizers. Each manufacturer must apply for its own identification byte (Sequential Circuits = 1, Kawai = 40h, and so on). An END OF EXCLUSIVE (EOX) or another status byte tells deselected devices to resume listening to bux data.

SYSTEM COMMON messages address all synthesizers on line. They are used primarily for setup information, such as selecting songs or telling synthesizers to tune their oscillators.

The first byte of all MIDI commands has its most-significant bit (MSB) set to 1, so command bytes are always between 80h and 0ffh. Data bytes have their MSBs reset (0), so their range is 0 to 7fh. If a given block of data contains values greater than 7fh, all bytes in the block are broken into 7-bit nibbles and sent in two parts. This keeps the MSBs reset so that receivers can always stay in sync—even if a byte is lost.

MIDI Hardware Specification

The original MIDI specification made some trade-offs between speed, economy, and efficiency, which inevitably resulted in performance compromises. It is easy to point out shortcomings now that the interface has become widely known, but the low cost had a lot to do with its initial acceptance.

MIDI is a serial protocol that communicates on a 31.25-kHz, optically isolated current loop. The odd baud rate resulted from the reluctance of earlier manufacturers to install special crystals when they usually had a 1–4-MHz processor clock available (31.25 kHz=1 MHz/32). Use of a convenient single-chip binary divider yields the 31.25-kHz UART clock.

Optical isolation is required for eliminating ground loops and isolating sensitive audio equipment from the high frequencies in computer gear. An optically isolated parallel interface could have been specified, but serial interfacing decreases the cost for the isolators and simplifies cabling. The penalty, of course, is speed. Clock rates are limited by cable capacitance and by response times for economical optos and UARTS. Some manufacturers are now using 62.5 -kHz (double frequency) rates for downloading waveform samples or other data-intensive applications, but it is unlikely that the baud rate standard will change in the near future.

The optos at the receiving end of each MIDI link require about 5 mA to turn on. Because the loop sends a current (like old Teletype machines do). it is relatively immune to noise as long as cables don't extend more than 50 feet. The built-in current limit resistors prevent star-network configurations (only one receiver can be hooked to a transmitter), so a third port (the MIDI THRU port) is included on most synthesizers to allow daisychaining of receivers. The MIDI THRU port duplicates the data coming from the MIDI IN port and retransmits it to the next machine in the chain.

Speed Considerations

Most MIDI NOTE-ON or NOTE-OFF commands require 3 bytes at 320 microseconds per byte, so turning on a note on the synthesizer takes approximately 1 millisecond. The human ear is more sensitive to starting (attack) transients than to ending (decay) timings-for psychoacoustic reasons and simply because the played notes usually start off sharply and taper off before their final decay. This means that even in best-case circumstances when no other events are being sent over the MIDI bus, starting transients for ten NOTE-ON events will be spread apart by 10 milliseconds. This approaches the threshold of audible delay, and additional notes may have a slap-echo effect. Similarly, large chords may be audibly arpeggiated.

To avoid objectionable delays, some MIDI hardware now features multiple MIDI OUT ports. The computer sends parallel commands to each port to avoid daisy-chaining delays. These should not be confused with MIDI THRU ports, which track the MIDI IN port. Multiple MIDI IN ports are less common but certainly helpful when recording events coming from more than one source. Because MIDI is a multibyte protocol, merging and recording two sources can be fairly complex if only one input port is

available.

Designing a Sequencer

MIDI control software can be written in any language, but fast queuing of serial data is important. The majority of software writers I know use a mixture of C and assembly language. It may be convenient to use a compiler such as Wizard C, which allows dropping into assembly language for I/O access or speed.

Small computers can be used, but be aware that RAM can be used up quickly. If storage for a single note uses 8 bytes, an eight-finger chord will use 64 bytes, and playing eight of these chords in one measure will use 0.5K RAM. Linear address space is easy to allocate and control, and segmented architectures present no large problems because a segment is usually more than enough to record any single sequence of note events (a track in recording terminology). Bank-select RAM is usually a problem when several tracks are played back in parallel. If the tracks are stored in separate banks, the switching overhead may be cumbersome.

Most of my current designs use IBM PCs and ATs, so some of the examples focus on 8088 designs, but the design principles will adapt easily to other computers.

Designing Hardware

Custom hardware affords some measure of software security and may provide functions not available on existing interfaces. Because some designers prefer using their own hardware, I will provide a few guidelines.

MIDI's serial protocol requires no hardware handshake signals, so 40-pin UARTs are not necessary. The only small UART that may cause trouble is the Intel 8251. I have used Motorola 68B50s in several designs with good results. On 8088 systems, Motorola's E (enable) signal can be developed by ANDing the port read and write signals together.

Timers get tricky when multiple devices are hooked to one interrupt line. I have used Intel 8253s, but I usually connect the output line to a flipflop so that the output pulse can be trapped and identified. Flip-flops are not necessary if the timer interrupt is isolated because the 8259 interrupt controller has edge-triggering.

Most MIDI programs that run on the IBM PC use Roland's MPU-4OI interface. Timers are not required on IBM PCs that use this interface, but if you are designing your own, try to include an on-board timer. The PC's internal timers do not provide the accuracy necessary to deal with highresolution music timing. For lowresolution applications, IRQ 0 from the PC motherboard can be readjusted to run at a multiple (X) of its normal speed. Then, every X pulses, the old interrupt service routine is run. The interrupt acknowledge should be skipped when jumping to the old routine. Remember to reset the interrupt vectors before exiting to DOS. Disk head loads use timer 0 for timeouts, so problems with this routine usually cause the drive light to stay

Slower clock rates for hardware timers obviously result in decreased resolution. Not so obvious, though, is the way that tempo resolution and note-timing accuracy combine to make even tougher demands on the system timer's crystal frequency. I try to clock the timer at around 2 MHz so that I can record with a resolution of about 96 divisions per quarter note while maintaining sufficient accuracy in specifying tempos.

In most applications, the divisor sent to the hardware timer is used to trim the tempo, which is set in increments of beats-per-minute (BPM). An easy way to control tempo is to index into a table of divisors by the desired number of BPMs. I normally generate the tables with a C program that does the calculations and prints out the tables exactly as they should appear in the sequencer program. When the values are verified, I redirect the output of the program into a file that is then compiled.

Interrupts

The interrupt service routine (ISR) is responsible for prioritizing interrupts and coordinating all incoming data. Obscure problems with the ISR can propagate through the entire system. A flowchart will probably help to clarify possible timing errors or bottlenecks before the ISR is coded.

It might appear that a system using only serial ports would pose no problems in I/O handling, but MIDI baud rates are high, and there may be mul-

tiple ports. Input interrupts should be serviced as quickly as possible because losing a byte may result in losing an important NOTE-OFF message. When the recorded events are retransmitted on playback, the synthesizer will play a stuck note until the operator can figure out a way to generate a NOTE-OFF (sometimes leaving an embarrassed performer desperately groping for the power switch). Output interrupts are less critical; a momentary delay is the only penalty for slow output response times. Be particularly careful how these two interrupt sources are handled when

UART hardware lines are shared.

On the IBM PC, the first instruction in the ISR can be an STI (the BIOS does this) for reenabling higher-priority interrupts. Lower-priority interrupts can be enabled by masking the present interrupt and sending an acknowledge (EOI) to the interrupt controller. The pending interrupt cannot be retriggered until the source of the interrupt is reset (UART is read and so on). Make sure that the pending interrupt line is high (active) when sending the EOI because obscure problems can result with the 8259 when it cannot find the source

BSW-Make

A practical and efficient

software configuration manager for MS-DOS, VAX/VMS, and VM/CMS

At The Boston Software Works, we routinely work with a number of different operating systems and development environments. One tool we have found to be indispensable is BSW-Make. BSW-Make is a complete implementation of the UNIX make utility. It automates the tedious task of rebuilding your software after an editing session; BSW-Make does only the minimum work required to update your program after a change, saving time and preventing missed compiles.

We carefully constructed BSW-Make to be portable, and have used it successfully under MS-DOS, PC-DOS, VAX/VMS, and VM/CMS. We wouldn't want to start a major software project without it, and we think you won't either, once you've tried it.

Highlights of BSW-Make:

- Works with any compiler, assembler, linker, or text processor
- Not copy protected
- Indirect command file generation facility overcomes operating system command length limitations
- Macro facility for parameterized builds
- Syntax compatible with UNIX make
- 30-day unconditional money-back guarantee

MS-DOS \$89.95

VAX/VMS from \$395.00 VM/CMS call us

BSW-Make for MS-DOS runs on any MS-DOS machine. It requires MS-DOS or PC-DOS version 2.00 or later, and is shipped on IBM PC 54 inch diskettes.

runs on any VAX or for VM/CMS runs on any MicroVAX running VMS IBM 370-series, 43xx, 308x, version 4.0 or later. It is shipped on 9-track magtape, RX50 diskette, or TK50 9-track magtape. tape cartridge

BSW-Make for VAX/VMS (Available soon) BSW-Make or 309x system running VM/CMS. It is shipped on

All prices include shipping within the United States and Canada. Foreign orders (except Canada) add \$10.00 handling; actual shipping cost will be billed. We accept checks, MasterCard or VISA, or company purchase order.

> The Boston Software Works, Inc. 120 Fulton Street, Boston, MA 02109 (617) 367-6846

CIRCLE 384 ON READER SERVICE CARD

ISR Timer? Service for Other Process Increment Semaphore Get a Copy of Semaphore Re-enable Interrupts N Semaphore-Copy = = 1?Increment Timer Chain Event Ready? Do Event Decrement Semaphore N Semaphore $=\emptyset$? Exit from Interrupt

Figure 1: Flowchart for timer interrupt using semaphore

MUSIC RECORDER

(continued from page 29)

of the interrupt being acknowledged. It may also help to poll the 8259 registers to make sure that the interrupt line is low before exiting from the ISR. This will help to avoid difficulty with the PC's edge-triggered hardware.

Timer interrupts are important, but they can generally be considered a lower priority than UART interrupts. The timer routine itself is usually short, consisting of little more than incrementing a series of software counters, but at some point compares must be made with target values and a long series of events may be triggered.

The timer interrupt conveys no actual data aside from a flag, so normal queues are not necessary. The best way to enqueue timer interrupts is with a semaphore, which allows the ISR itself to be interrupted. When the timer tick occurs, the semaphore is incremented and timer interrupts are re-enabled. If the semaphore has been incremented to 1, no interrupts are nested and normal processing can resume. If the value is greater than 1, this means that the timer interrupts have stacked up, so the interrupt is exited and control is returned to the timer ISR that was interrupted. Before the timer ISR exits, the semaphore is decremented, and if the value is still nonzero, the interrupts must have been nested. In this case, control is returned to the top of the timer ISR, which loops until the semaphore returns to zero. This allows the ISR to catch up with lost interrupts without losing any timer pulses or **UART** interrupts.

The flowchart in Figure 1, left, is simplified; it may help to refer to the code listing (Example 1, page 31) for more subtle details. Make sure the semaphore is initialized to zero at start-up or the timer ISR will never run.

Timing Notes

The MIDI sequencer usually uses a hardware clock for its main timing reference, but it may be necessary to synchronize to an external software clock provided by a drum machine or timing converter. I will refer to these as internal and external sync,

respectively. MIDI software clocks occur at a standard rate of 24 per quarter note, which provides musical resolution to within a 64th note triplet. This sounds as though it would keep up with even the fastest musicians, but remember that you are dealing with timing edges. Trimming these edges to the nearest 24th of a quarter note may cause the recorded notes to sound too symmetrical, or mechanical

Conversely, it may seem that slowing the system clock could correct the timing of inaccurate note values. This rounding (quantization) is sometimes used to advantage, but overuse removes the human signature and creates a metronomic, mechanical sound. Uneven qualities are most often missed on parts such as solos, which appear up front in a composition. Obviously, all devices synchronized with MIDI real-time clock signals will be quantized to some extent.

Time Stamps

In order to maintain precise timing of events while allowing interrupts to proceed at full speed, I store a time stamp with each event coming into the UART receive queue. Very simply, if a received byte is greater than 7fh (MSB is set on all commands), the current time is enqueued after the byte. This provides freeze-frame timing; the time record travels with the received data until the program is ready to process it. Only the leading byte needs to be time-stamped. Follow-up data (with MSBs reset) are assumed to have been received at the same time. This technique can provide accuracy better than that obtainable by waiting for the complete record and processing it instantly. Usually the sending device intends that all bytes be received simultaneously, so stamping the leading byte will more accurately reflect the actual event timing, even if the transmitter lags in sending the follow-up data.

Real Time

The MIDI specification calls for two basic types of software clocks. Clockin-stop (0fch) allows receivers to phase-lock to the clock frequency prior to start-up. When the transmitter switches to clock-in-play (0f8h), all synchronized receivers switch to their active state (usually playback or

```
TIMER ISR
 This partial listing will help to model a timer int. based on semaphores
        segment para public 'dseg'
dsea
t sem
        dw
                                  ; make sure this value always starts at
dsea
        segment para public 'cseq'
        assume cs:cseg, ds:dseg
        public int vector
int vector proc far
        sti
                 si
        push
                                  ; save all registers
        push
                 di
        push
                 ax
        push
                 hx
        push
                 CX
        push
                 dx
        push
                 ds
        push
                 es
                                  ; set up for access to data seg in this
                 di, dseg
                                                                    module
                 ds.di
        mov
                                  ; loop point for retries if more ints hit
 again:
        mov
                 si, [t sem]
                                  ; 'sample' the semaphore before increment !
                 [t_sem]
        inc
        mov
                 al. 20h
                                  ; this will acknowledge interrupts on IBM
        out
                 20h, al
        call
                 reset_timer_ff ; toggle flip-flop hooked to the timer chip
        ; Interrupts are now re-enabled
                                  ; Check the 'sampled' semaphore
        or
                 si, si
                 i loop
                                 ; If semaphore was zero, execute tmr
                                                                routine
         Skip the main timer routine if this is a nested int - check for
                si,200
                                 ; Too many interrupts stacked-up?
        cmp
                                                         (overflow?)
                                 ; If not, exit directly.
                skip
        ic
        ; Interrupts have overflowed -- stop and check timer values
        call
                 emergency stop ; semaphore overflow! timers are set too
        jmp
                skip
i loop:
        ; Execute the main timer routine - then check for stacked interrupts
        call
                 timer routine
                                 ; run main timer chain
                                  ; if sem dec's to zero, no ints are nested
        dec
                 [t sem]
                 i loop
                                  ; if ints ARE nested, loop back to catch up
        jnz
skip:
        non
                 es
        pop
                 ds
        pop
                 dx
                 CX
        pop
        gog
                 bx
        pop
                 ax
        pop
                 di
                                  ; restore registers and return
        pop
                 si
        iret
int vector endp
        ends
```

Example 1: A MIDI interrupt service routine with a semaphore

(continued from page 31)

record). To maintain accuracy, realtime messages are transmitted at any time—even in the middle of other multibyte messages. Receivers must account for this possibility even if the real-time messages are not used. Both clocks are always sent at the rate of 24 per quarter note. Altering the clock frequency changes tempo, not accuracy.

Other real-time messages include START-FROM-BEGINNING (Ofah). which resets internal song pointers; CONTINUE (0fbh), which tells receivers to resume from the current location; and ACTIVE SENSING (0feh). which just lets the receivers know that the transmitter is still there. The latter is optional and used notably by the Yamaha DX-7 synthesizer. When using a DX-7, you will probably want to discard the 0feh bytes because they will be received constantlyeven when not recording. They can fill up the input queues if the input interrupts are enabled.

The last real-time message, SYSTEM RESET (0ffh), is dangerous because it could start a regenerating condition in which every component in the system sends resets to each other. It is usually reserved for linkage to a hardware reset switch or used judiciously by the master controller.

Storage Formats

There is no standard yet for either RAM- or disk-based storage for MIDI events. I have heard rumors of a standard for disk storage that would allow one manufacturer's software to read files written by someone else, but intermediate RAM storage is another story. The storage formats used throughout the industry are diverse and usually so complex that changing internal formats would require extensive rewrites.

Most internal storage methods fall into one of four categories that I call

end-point-relative, end-point-absolute, single-point-absolute, and barand-note storage. All storage formats involve storing data in a linear data stream. Relative timing implies that timing is encoded as a distance from the previous event. Absolute timing uses a global time reference, such as beats and bars. End-point storage refers to separate storage locations for NOTE-ON and NOTE-OFF events (usually with their own time stamps). Single-point storage requires that a pointer be aimed at the NOTE-ON record in the data stream, and when the NOTE-OFF event is received, it is stored at the same location (better yet, the note duration can be computed and stored). The bar-and-note method parallels the way music is normally notated. Each method has advantages, and there is a lot of overlap between categories.

I try to carry MIDI's philosophy of setting MSBs of leading bytes when encoding data for storage in the stream. This allows resyncing if a byte is missed and makes data streams easier to edit. Many software writers use this method for internal storage.

End-Point-Relative Storage

MIDI data is received as a stream of bytes with high bits (MSBs) set on commands and reset on data. Why not store the bytes just as they are received? Embedded MIDI clock messages provide the proper spacing for NOTE-ON, NOTE-OFF, and other events. Replaying the data requires setting up a series of play pointers into the data stream (one for each track to be played). When the start command is received, the data is sent to the output UARTs just as it was received, waiting for a 24th of a beat every time a clock command is encountered in the stream. Unfortunately, this method uses RAM storage even if no events are being transmitted, and multiple channels store multiple copies of all unnecessary timing bytes.

In Example 2, below, it is assumed that an external MIDI clock provides the timing. Even if an internal timer is used, 0f8h bytes can be inserted into the input queue to simulate the MIDI software clock. A refinement of this method conserves storage by counting all received clock bytes. When an event is received, the accumulated count is stored before the event and then the counter is reset.

End-Point-Absolute Storage

Time stamping requires a system timer that is incremented every time a MIDI clock or timer interrupt is received. When MIDI data is enqueued, the system timer is copied into the queue as the time stamp. When the data is dequeued for storage, the time stamp is stored with the data record to provide an accurate absolute timing reference. Unlike relative timing, this allows you to locate any spot in the data stream without counting all embedded timing bytes. To replay time-stamped data, restart the system timer and wait until it matches the timing bytes of the first item in the data stream. Then send the data (without the time stamp), and advance the stream pointers.

Example 3, page 37, uses only 2 bytes for the time stamp and for the system timer. More practical systems use 3 bytes to allow more than two hours' recording time before the timer overflows (at 96 pulses per quarter). The low-order byte is incremented until it reaches 96 (or 24 for MIDI clock timing). Then the byte is reset and the count propagates through the other two timer bytes. The top timer bytes turn over at 127, so the MSBs are always zero.

Single-Point-Absolute Storage

Single-point storage requires maintaining a list of pointers to access active notes in the data stream. When a NOTE-ON is received, it is enqueued and stored in the data stream in the

```
- f8h ----- f8h 94h 46h 32h ------ f8h 84h 46h 16h ----- f8h | wait 24th | wait 24th | then | wait 24th | then | output a NOTE-OFF on ch.4 | for note no. 46h | for note no. 46h | velocity = 32h | OFF velocity = 16h
```

Example 2: End-point-relative storage

PHANTASTIG! A SUPER SALE ON PHOENIX PROBLEM PR

Plink®86plus

Plink86plus lets you go beyond your personal computer's 640K memory limitation. This highly advanced DOS overlay linker provides capabilities that are unmatched by any other DOS linker.

Large, Efficient Programs

With Plink86plus, you can create very large programs that use very little memory — programs as large as 16 megabytes run in as little as 192K! And advanced memory management features ensure that even the largest programs will execute efficiently.

Automatic Overlays

The automatic overlay technique of Plink-86plus lets you get your programs up and running fast. You can divide your program into as many as 4095 tree-structured overlay areas and change its structure anytime without modifying the program source code. You can store the overlays in separate files, separate directories or on separate disks. You have complete flexibility.

Wide Support

Plink86plus supports any compiler or assembler producing standard Intel or Microsoft OBJ files. It works with all popular language systems including FORTRAN, COBOL, Lattice C, CI C-86 and any Microsoft or IBM language.

Pfix®86plus

Pfix-86plus is an easy-to-use, menu-driven, symbolic debugger that works with any Microsoft or IBM compiled language.

Symbolic Debugging

Pfix86plus automatically handles Plink86plus overlaid or resident programs. It can also access the full symbol table provided by MS Link. Source code, assembly language translations, stack, data areas and breakpoints all appear simultaneously on the multiwindow display.

Full-featured

Pfix86plus features include an in-line assembler, breakpoint settings, full speed or trace modes, user-assignable variables, dual-monitor support, traceback, debug log, synchronized source code display, breakpoints in source code, disassembly to disk and much more.

PforCe™

PforCe is a comprehensive library of over 400 easy-to-use C language functions designed to significantly reduce your program development time.

Complete C Library

PforCe provides high-level subsystems for B-tree databases, windows, field editing, screen editing, time/date calculations, directory management, error-trapping, etc. It also provides low level functions that can interface directly to your hardware. It has interrupt-driven communications, string handling, menus, keyboard background tasking and complete DOS control. Other features include disk management, archiving, compilation, library management utilities and much more. PforCe comes with full library source code and demo programs.

And for C++ Users

PforCe++ is an alternate version of PforCe that's specifically designed for object-oriented programming with C++.

Pfinish™

Pfinish is a high performance execution profiler that helps you locate inefficiencies in programs which slow execution or waste memory space.

Execution Snapshot

Pfinish provides you with a complete statistical snapshot of your program in execution. Its comprehensive output reports may be displayed or printed in either tabular form or histograms. The results can be sorted in many ways. By examining these reports, you can determine the number of times various sections of code in your program have been executed.

Pinpoint Accuracy

Pfinish lets you pinpoint execution down to the exact subroutine line number. By inserting markers inside executable programs, you can track the number of times your program passes each marker and determine which other routines were affected by individual calls.

Overlay Support

Pfinish fully supports overlaid programs created with Plink86plus.

Pfantasy Pac*

Phoenix combination package consisting of Plink86plus, Pfix86plus, Pfinish, Pmaker, Pmate and Ptel.

CIRCLE 98 ON READER SERVICE CARD

Make the Connection . . .

Phoenix Technologies is well respected in the world of personal computer programming. We at Programmer's Connection are pleased to be your complete source for these high quality software products.

phoenix products

Pasm86 Macro Assembler Version 2.0	195	108
Pdisk Hard Disk & Backup Utility	145	89
Pfantasy Pac Phoenix Combo Sale	1295	799
Pfinish Execution Profiler Sale	395	209
Pfix86plus Symbolic Debugger Sale	395	209
PforCe Comprehensive C Library Sale	395	209
PforCe++ Library for Guidelines C++ Sale	395	209
Plink86plus Overlay Linker	495	279
Pmaker Make Utility.	125	78
Pmate Macro Text Editor	195	108
Pre-C Lint Utility	295	154
Ptel Binary File Transfer Program	195	108

List Ours

Prices include **FREE** UPS surface shipping to all U.S. customers. Express services are also available at the shipping carrier's standard rate.


Please refer to our main advertisement in this journal for ordering information and the largest advertised selection of programmer's development tools for IBM personal computers and compatibles.

CALL TOLL FREE

U.S	800-336-1166
CANADA	800-225-1166
OHIO and ALASKA	216-877-3781
(Call Collect)	



Programmer's Connection 136 Sunnyside Street Hartville, Ohio 44632

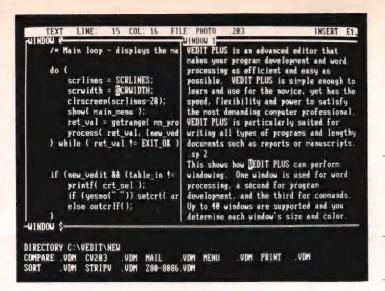



PROGRAMMABLE EDITOR

(Call for FREE DEMO disk)

Stunning speed. Unmatched performance. Total flexibility. Simple and intuitive operation. The newest VEDIT PLUS defies comparison.

Try A Dazzling Demo Yourself.

The free demo disk is fully functional - you can try all features yourself. Best, the demo includes a dazzling menu-driven tutorial - you experiment in one window while another gives

The powerful macro programming language helps you eliminate repetitive editing tasks. The impressive demo/tutorial is written entirely as a 'macro' - it shows that no other editors macro language even comes close.

Go ahead. Call for your free demo today. You'll see why VEDIT PLUS has been the #1 choice of programmers, writers and engineers since 1980

Available for IBM PC. TI Professional, Tandy 2000, DEC Rainbow, Wang PC. MS-DOS. CP/M-86 and CP/M-80. (Yes! We support windows on most CRT terminals, including CRT's connected to an IBM PC.) Order direct or from your dealer. \$185

- manage factures

Compare features				
and speed	BRIEF	Norton Editor	PMATE	VEDIT PLUS
Off the cuff macros	No	No	Yes	Yes
Built-in macros	Yes	No	Yes	Yes
Keystroke macros	Only 1	No	No	100 +
Multiple file editing	20 +	2	No	20 +
Windows	20 +	2	No	20 +
Macro execution window	No	No	No	Yes
Trace & Breakpoint macros	No	No	Yes	Yes
Execute DOS commands	Yes	Yes	Yes	Yes
Configurable keyboard				
Layout	Hard	No	Hard	Easy
Cut and paste buffers	1	1	1	36
Undo line changes	Yes	No	No	Yes
Paragraph justification	No	No	No	Yes
On-line calculator	No	No	No	Yes
Manual size / index	250/No	42/No	469/Yes	380/Yes
Benchmarks in 120K File:				
2000 replacements	1:15 min.	34 sec.	1:07 min.	6 sec.
Pattern matching search	20 sec.	Cannot	Cannot	2 sec.
Pattern matching replace	2:40 min.	Cannot	Cannot	11 sec.

VEDIT PLUS FEATURES

- · Simultaneousy edit up to 37 files of unlimited size.
- · Split the screen into variable sized windows.
- · 'Virtual' disk buffering simplifies editing of large files.
- · Memory management supports up to 640K.
- · Execute DOS commands or other programs.
- · MS-DOS pathname support.
- Horizontal scrolling edit long lines.
- Flexible 'cut and paste' with 36 'scratch-pad' buffers.
- Customization determine your own keyboard layout, create your own editing functions, support any screen size.

 Optimized for IBM PC/XT/AT. Color windows. 43 line EGA.

EASY TO USE

- Interactive on-line help is user changeable and expandable.
- · On-line integer calculator (also algebraic expressions).
- Single key search and global or selective replace.
- Pop-up menus for easy access to many editing functions.
- Keystroke macros speed editing, 'hot keys' for menu functions.

FOR PROGRAMMERS

- · Automatic Indent/Undent for 'C', PL/I, PASCAL, etc.
- Match/check nested parentheses, i.e. '{' and '}' for 'C'.
- · Automatic conversion to upper case for assembly language labels, opcodes, operands with comments unchanged.
- Optional 8080 to 8086 source code translator.

FOR WRITERS

- · Word Wrap and paragraph formatting at adjustable margins.
- Right margin justification.
- · Support foreign, graphic and special characters.
- · Convert to/from WordStar and mainframe files.
- · Print any portion of file; selectable printer margins.

MACRO PROGRAMMING LANGUAGE

- If-then-else, looping, testing, branching, user prompts, keyboard input, 17 bit algebraic expressions, variables.
- Flexible windowing forms entry, select size, color, etc.
- · Simplifies complex text processing, formatting, conversions and translations.
- · Complete TECO capability.
- Free macros: Full screen file compare/merge Sort mailing lists • Print Formatter • Menu-driven tutorial

VEDIT and CompuView are registered trademarks of CompuView Products. Inc. BRIEF is a trademark of UnderWare. Inc. PMATE is a trademark of Phoenix Technologies Ltd. Norton Editor is a trademark of Peter Norton Computing Inc.



Meridian Software Systems, Inc. announces the world's first pre-validated Ada compiler for PC-class machines requiring no additional hardware. The Meridian AdaVantage" compiler hosted on IBM PC/XT/AT and compatibles running MS-DOS was pre-validated using ACVO version 1.8.

The introductory price is \$395.00. After July 1, 1987, the list price will be \$795.00.



23141 Verdugo Drive, Suite 105 Laguna Hills, California 92653 714/380-9800

THE DOCTOR MAKES HOUSECALLS!

Get the diagnosis from the Doctor in your own home.



Subscribe to *Dr. Dobb's Journal* and enjoy the convenience of having your personal copy delivered to your home or office each month.

And you'll save over \$5 off the cover price!

Every issue of *Dr. Dobb's* will bring you indispensable programming tools like algorithms, coding tips, discussions of fundamental design issues, and actual program listings. You'll find regular coverage of:

- Popular languages such as C, Assembly, Forth, Pascal, Ada, Modula-2, BASIC, FOR-TRAN, and Cobol.
- 68000 and 80x86 architectures
- The MS-DOS, and Unix operating systems
- Usable techniques and practical applications of AI and object-oriented programming research.
- New product reviews, and lively discussion of professional issues in software design.
- Compilers, cross assemblers and much more!

Dr. Dobb's Journal of Software Tools... the magazine that has lived up to its reputation as the foremost source of technical tools since 1976. One year (12 information-packed issues) is just \$29.97—to subscribe simply mail in the attached card. But do it today...you won't want to miss any of the exciting issues we have planned.

DR. DOBB'S **JOURNAL**

OF SOFTWARE TOOLS

THE

FOR PROGRAMMERS

SUBSCRIBE NOW AND SAVE **OVER** 15%

OFF THE NEWSSTAND PRICE!

SUBSCRIBE & SAVE

Subscribe to DR. DOBB'S JOURNAL and save over \$5-a 15% savings off the cover price!

☐ Please charge my: ☐ Payment enclosed	☐ Visa☐ Bill me later	☐ MasterCard	American Express
Card #		Exp. date	
Signature			
Name			
Address			
City		State Z	ip

ONLY \$29.97! YOU SAVE OVER \$5.00

Savings based on a full one-year cover price of \$35.40. Canada and Mexico add \$10 for surface mail per year. All countries add \$27 for airmail per year. All foreign subscriptions must be prepaid in U.S. dollars drawn on a U.S. bank. Please allow 6-8 weeks for delivery of first issue

A Publication of M & T Publishing, Inc.

3446

SUBSCRIBE & SAVE

Subscribe to DR. DOBB'S JOURNAL and save over \$5—a 15% savings off the cover price!

Please charge my: Payment enclosed	☐ Visa☐ Bill me later	∐ MasterCard	American Express
Card #		Exp. date	
Signature			
Name			
Address			
City		State Z	ip

ONLY \$29.97! YOU SAVE OVER \$5.00

Savings based on a full one-year cover price of \$35.40. Canada and Mexico add \$10 for surface mail per year. All countries add \$27 for airmail per year. All foreign subscriptions must be prepaid in U.S. dollars drawn on a U.S. bank. Please allow 6-8 weeks for delivery of first issue

A Publication of M & T Publishing, Inc.

3446

-Ed

COMMENTS & SUGGESTIONS

May 1987, #127 Dear Reader, Dr. Dobb's has a long tradition of listening to its readers. We like to hear when something really helps or, for that matter, bothers you. In this hectic world of ours, however, it is often difficult to take the time to write a letter. This card provides you with a quick and easy way to correspond and, if you include your name and address, we may use appropriate comments in The Letters column. Simply fill it out and drop it in the mail. Which articles or departments did you enjoy the most this month? Why?

Comments or suggestions: Name. Address: .

BUSINESS REPLY MAIL

FIRST CLASS PERMIT 790, REDWOOD CITY, CA

Postage Will Be Paid By Addressee

Dr. Dobb's Journal of Software Tools

Box 3713 Escondidio, CA 92025-9843

Halanddllamblididididialadadadadbbidd

No Postage Necessary If Mailed In The United States

No Postage

Necessary
If Mailed
In The
United States



OF SOFTWARE TOOLS

THE

R

FOR PROGRAMMERS

BUSINESS REPLY MAIL

FIRST CLASS PERMIT 790, REDWOOD CITY, CA

Postage Will Be Paid By Addressee

Dr. Dobb's Journal of Software Tools

Box 3713 Escondidio, CA 92025-9843

Halambillian blabbbbbbbbbbbbbbbbbbbbbbbbbbbbbb

PLACE STAMP HERE SUBSCRIBE NOW AND SAVE OVER 15%

OFF THE NEWSSTAND PRICE!

Dr. Dobb's Journal of
Software Tools

501 GALVESTON DR. REDWOOD CITY, CA 94063

MUSIC RECORDER (continued from page 32)

same way as in end-point-absolute storage, but zeros are stored afterward in a compartment reserved to keep track of the note's duration. A pointer to the zero bytes is stored in a list to allow access to the duration. Every time a MIDI clock byte or timer interrupt is received, the list is checked and the pointers are used to increment duration bytes. When the NOTE-OFF event is received, the pointer is removed from the list-no other action is necessary. The duration will be frozen as part of the note record. Single-point-absolute storage provides advantages in editing (notes can be moved easily) and display (it is easy to tell whether a note is a quarter note, half note, and so on).

In Example 4, below, during play-back *NOTE-ON*s are derived in the usual way (wait until the system timer reaches the embedded time stamp), but this time the duration bytes are retrieved and stored in a time-out list. They are decremented with every timer tick, and when they reach zero, a *NOTE-OFF* is transmitted. The time-out list must keep a copy of the note number so that the proper note can be turned off. The single-point method affords another

advantage: it is unlikely that notes will get stuck. *NOTE-OFF* events cannot be missed. Any reasonable value in the time-out list will eventually decrement to zero and cause a *NOTE-OFF* to be sent.

Bar-and-Note Storage

So far. I have discussed playing notes but not rests. Of course, rests are simply the spaces between notes, but the storage formats outlined do not provide a way of tracking down these spaces for correlation with written music. Rests can be stored in the same way as notes, but note numbers and velocities are not needed. This seems to be a reversion to the original relative timing method when you consider that rests are similar to the old embedded relative timing markers. Now the NOTE-ON time stamps become redundant-where one note or rest stops, the next will start. Without some frame of reference, though, it is difficult to find a designated spot in the data stream. I have borrowed another device from written music: bar lines. There is no MIDI equivalent for a bar line, so I use Obah. The bar marker is followed by 1- or 2-byte bar numbers to allow absolute locations to be found. This combines some of the better features from all the methods outlined earlier. I use 0a0h as the token for a rest (see Example 5, below).

Some storage formats are better suited to certain approaches to editing or to certain looping constructs or display formats. Choose a format that suits your application, but remember to take as general an approach as possible. You will undoubtedly want to expand later to incorporate new ideas.

Quantization

I first mentioned quantization in the context of scaling down the system clock. If a section of music was recorded using a clock with 96 pulses per quarter note, the system clock could simply be slowed to 24 pulses per quarter note. Each timer interrupt would then increment the system timer by 4 instead of 1. This method works, but it has one main drawback. If there is no frame of reference (an unquantized track, for instance), it may not be noticed but all notes will effectively be shifted late by the quantize interval. This is like truncating a number when the real intention is to round it.

To quantize events so that the notes fall on the beat rather than after the beat, the timing target must be anticipated by half the amount of the quantization period. This causes

Example 3: End-point-absolute storage

Example 4: Single-point-absolute storage

Example 5: Bar-and-note storage

(continued from page 37)

events to be processed in the center of a quantize window. To accomplish this, the system timer contents are copied to a look-ahead timer and incremented so that it leads the actual system time by half the quantize interval. Using look-ahead timers for compares will trigger events ahead of time. Remember just to run the clock routine every Nth clock tick and to add N/2 to the current time to derive the look-ahead timer.

The same result can be accomplished by first running the clock routine N/2 times consecutively (this accounts for look-ahead). After this initial look-ahead, the clock cycle consists of waiting for N clock periods and then running the clock routine N times consecutively.

Quantization cleans up notes whose timing is slightly frayed at the edges, but some mistakes can actually be accentuated. If the mistake is severe enough to fall outside the intended quantize window, note timing will be rounded in the wrong

direction, as in note 3 of Figure 2, left.

I mentioned that the trailing edges of notes are usually much less timing critical than the leading edges. One of my favorite techniques for avoiding a mechanical sound is quantizing the leading edges of notes but leaving the lengths intact. This can be accomplished by using a look-ahead on the clock that pulls the NOTE-ON event and note length from the data stream. The unprocessed note length is stored in a time-out list, where it is decremented on each tick of the high-resolution clock. The appropriate NOTE-OFF is sent when it reaches zero.

The timing of recorded music is easily altered or quantized, but random timing information from human input is difficult to add later (you could try it). Some synthesizer systems, such as Fairlight, use high-performance hardware to derive timing clocks as high as 384 clocks per quarter note, but be wary of micro-based software that claims this level of accuracy. By attempting performance beyond the capability of the machine, the software can actually sacrifice accuracy.

Pilot Track

Most musical compositions have verses, choruses, and other types of sections. Sections are usually recorded or written separately. When all the sections are completed, they are rearranged, repeated, and so on by the use of what I call a pilot track. The pilot track in this type of system operates outside the time frame of the composition. In fact, it may be the only timing stream that moves in a linear fashion. Macro commands, such as play section 3, five times, can pilot the interpreter through the appropriate series of pointer loads, plays, and reloads to accomplish the task. (See Figure 3, page 39.)

The start of each section now becomes the main point of reference for note timing. At the end of a section, the system timer is usually reset and the pilot track is consulted to find the next section to be played. Each section is treated as if it were a separate composition, so each can continue up to the maximum length allowed by the system timer.

Some pilot-track schemes use a Forth-type stack to hold reiterative

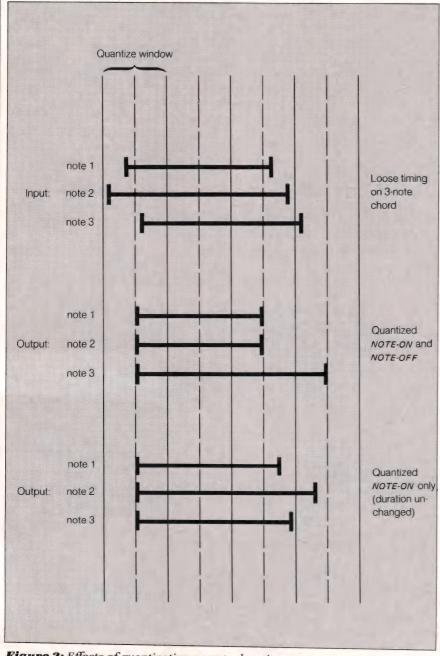


Figure 2: Effects of quantization on note durations

constructs and section or data references. I have even seen a sequencer that allows English statements such as SECTION 3 = VERSE 1 + CHORUS. In any case, the section is treated as a subroutine, with control returning to the pilot track when the section has completed.

Advanced Features

If you've made it this far, you may be interested in some of the extensions to MIDI protocol that allow more rapid transmission of event triggers. Running status says that the receiver keeps the most recently received command byte. If additional data

bytes are received without a leading command byte, the old command byte is used.

To transmit *NOTE-ONs* on channel 3 for note numbers 22h, 33h, and 44h with velocities of 55h, 66h, and 77h, the bytes shown in Example 6, page 41, could be sent. Duplicating the

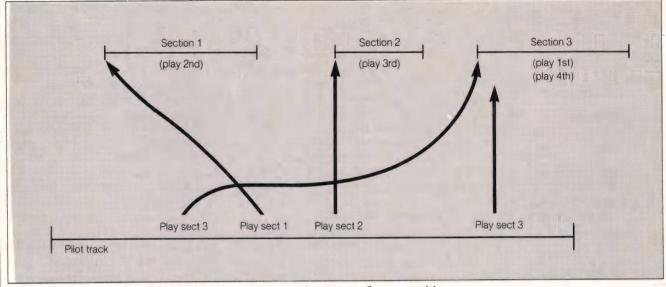


Figure 3: Relating the pilot track to previously stored sections of a composition

Solve Your Scientific Computing Problems with Springer-Verlag

Forthcoming in 1987.

Algebra by Computer: Using REDUCE

G. Rayna

REDUCE is a computer program for algebraic computation that is in world-wide use by thousands of scientists, engineers, and mathematicians. This new book offers in-depth case studies and examples of the use of REDUCE as a problem-solving tool in such areas as quantum electrodynamics, numerical analysis, and general relativity.

Contents: Introduction. Overview. A Harder Look. Setting Modes and Options. Procedures. Case Studies. Running REDUCE. Index.

1987/approx 329 pages/Hardcover (Symbolic Computation)

Programming with Sets: An Introduction to SETL

J.T. Schwartz, R.B.K. Dewar, E. Dubinsky and E. Schonberg

This new volume presents SETL, a very high level programming language based on the concepts and notations of the standard mathematical theory of sets. The language exemplifies the concept of "rapid software prototyping" which has been of strong recent interest in the programming community. Designed as a reference and a text, this book contains extensive examples illustrating the use of the language.

1986/493 pp/54 illus/Hardcover \$45.00 (Texts and Monographs in

Computer Science)
ISBN 0-387-96399-5

To order by credit card, use this toll-free number: (800) 526-7254 or send a check or money order (plus \$1.50 for shipping) to: **Springer-Verlag New York, Inc.**,



New York Berlin Heidelberg London Paris Tokyo

Error-Free Polynomial Matrix Computation E.V. Krishnamurthy

This companion volume to Methods and Applications of Error-Free Computation examines algebraic computations with an emphasis on polynomial matrix computations. With exercises provided after each chapter, this book describes topics such as the application of interpolation-evaluation techniques and related Fourier techniques over finite fields for polynomial matrix computations. A treatment of p-adic techniques is also provided.

1985/154 pp/Hardcover \$35.00 (Texts and Monographs in Computer Science)

ISBN 0-387-96146-1

Methods and Applications of Error-Free Computation

R.T. Gregory and E.V. Krishnamurthy

This is the first book to examine error-free computation as an alternative to standard floating point arithmetic. Much of this material appears here for the first time in book form.

1984/208 pp/1 illus/Hardcover \$36.50

(Texts and Monographs in Computer Science)

ISBN 0-387-90967-2

ATTENTION DATABASE DEVELOPERS

If you have the need for relational database management within your application programs

TURBO-DB™

is the programmer's tool you have been waiting for!

TURBO-DB offers a number of features for the software developer:

SMALL AND LARGE DATABASE MANAGEMENT

> AUNIQUE PROGRAMMATIC

INTERFACE FOR CUSTOM APPLICATION DEVELOPMENT

IN ASM, 'C', FORTRAN AND PASCAL

QUEL-TYPE **QUERY LANGUAGE**

INTEGRATED DATABASE **ADMINISTRATION**

DATABASE RECOVERY AND BACKUP UTILITIES

WRITTEN ENTIRELY IN 'C'-UNIX COMPATIBLE

For the IBM PC/XT/AT or compatible computers (256K RAM, DOS 2.0+, diskette or hard disk)

Software Developer Package I

- Interactive Query Writer
- **Database Administration**
- Database Backup and Recovery Utilities
- User Tutorial
- User Reference Manual

\$145

Software Developer Package II

- Software Developer Package I
- 'C' Object Code Interface
- Programming Interface Reference Manual

\$395

UPLAND SOFTWARE CO.

P.O. BOX 3136 • REDWOOD CITY, CA 94064 (415) 876-7636

MasterCard, Visa, Checks Accepted

MUSIC RECORDER (continued from page 39)

same series with an 83h as the first byte turns the notes off again.

To make this feature more useful, the special condition NOTE-ON with velocity = 0 is reserved to signal a NOTE-OFF operation. Its function is identical to the normal NOTE-OFF, but because it is actually a NOTE-ON command, the running status rule applies. The same notes could be turned on and off again by the bytes shown in Example 7, page 41.

Remember that NOTE-OFFs won't actually be sent immediately after NOTE-ONs. If any other command bytes are sent in between, the running status is interrupted and the command byte must be retransmitted.

Display Methods

Storage methods can be related to display methods in that the note events can be displayed at one spot (as a conventional music note) or they can be displayed as a (usually horizontal) band on the screen with the positions of the start and end points representing the start and end times of the note. The latter method, sometimes known as piano-scroll notation (because of the similarity to a player piano scroll), is analogous to the endpoint storage method I have outlined. So, do software designers who use single-point storage use conventional notation and designers who use endpoint storage use piano-scroll notation? Of course not. Strangely enough, some of the more popular software packages use exactly the opposite techniques from those you'd expect.

Both display methods have advantages: piano-scroll notation can be visible to musicians who are not accustomed to reading music, whereas conventional notation maintains high information density. Also, conventional notation always requires graphics capability. Piano-scroll can usually be done with text-mode

Displaying notes on staff lines requires at least 4 or 5 vertical pixels per line on the staff, for a total of 17-21 pixels for a complete staff line (4 lines times 4-5 pixels, plus an extra line). I have seen sheet music with

notes printed as far as six spaces above or below the staff, so it is wise to allow a lot of blank space on each side of a staff line. Allowing 60 vertical pixels total per staff should yield 5 or 6 staff lines on a high-resolution screen.

Horizontal formats are usually best handled and allocated by the byte. A screen 640 pixels across would divide into 80 horizontal compartments with screen objects treated somewhat like ASCII characters but with variable widths (a G clef requires two or three character widths).

Despite the popularity of IBM computers, the CGA's unfortunate lack of adequate screen resolution has limited its use for staff-line-oriented editors or forced earlier sequencers to use Hercules or other non-IBM graphics boards. The CGA screen produces square-looking notes, so conventional notation on this screen may not be worthwhile. I find the EGA graphics board extremely slow, but color is a valuable tool for displaying music. Notes on a staff line can be color-coded to designate channel numbers (to allow more than one channel per staff line). Monochrome editors sometimes allow selection between two channels per staff by directing note stems up or down.

Display formats will depend largely on the display devices you have on hand or wish to support. Although EGA boards have finally made the IBM PC competitive with other computers when displaying color, you may only want to enter musical notes and then print them out on paper. Some music transcribers are using Jim Miller's software without ever buying MIDI hardware for their computers. When doing black-and-white printouts, obviously a Hercules mono graphics card will suffice. The Hercules board has 720 horizontal pixels, which ends up looking a lot longer than the EGA's 640 pixels (sometimes a full bar of music).

Note-event editors take many different forms, but list-oriented editors are the easiest to design, followed by piano-scroll editors. List editors can simply convert a list of note numbers into NOTE-ON and NOTE-OFF events. This may be adequate if the main function of the software is to record live music being played on a synthesizer.

Most piano-scroll editors use strict binding between screen position and note events. The screen is sometimes partitioned into an even bar of music, for example. The x-axis position of the cursor then relates directly to the music's time domain.

Staff-line editors usually require a complex series of pointers to correlate records in the data stream with locations on the screen. Using a cursor to locate and change a point within the music data stream can be a difficult task because the screen spacing may be nonlinear when related to the time domain (a bar consisting of a single whole note will be shorter than a bar that holds a series of 16th notes). Many staff-line editors do require vertical alignment of synchronized events, such as left-and righthand piano parts that are written on separate staffs. This allows the screen to be swept from left to right with a single x-axis pointer, but strange timing errors are introduced by the converter when vertical alignment is not maintained. If you are writing this type of editor/converter, I recommend keeping a separate x-axis pointer for each staff line. Staff-oriented editors are further complicated by the need for multiple data representations. The on-screen symbols usually must be transformed into a format that is quite different in order to play them as MIDI notes.

A piano-scroll editor is a good starting point for experienced software writers who have limited knowledge of traditional musical concepts. Only the most experienced writers should attempt to write a staff-line editor, as it requires a thorough knowledge of both music theory and programming.

Writing Your Own Patch Editor

One of my current projects is a patch editor for the Kawai K-3 synthesizer, so I can explain exactly how patch editing works. The K-3 generates sound by building waveforms from sine-wave harmonics. These waveforms can be manipulated from the K-3's front panel, but the addition of a computer screen offers an enormous advantage in visualizing sounds as waveforms are being altered. In my wave editor, color-coded bars move to indicate harmonic numbers and amplitudes. As the operator tailors the waveform by adjusting the onscreen representation, an internal table of values is also adjusted. Just as in a text editor, different versions of the data can be saved to disk as the waveforms are being edited. The K-3 holds only 1 internal user-defined wave, but I hold up to 100 waves within one file so they can be compared and interchanged.

When a patch or wave is ready to be sent to the K-3, a MIDI SYSTEM EXCLUSIVE command tells the synthesizer to expect new patch information. No acknowledge is necessary—the harmonic numbers and amplitudes are sent out immediately. Transmit-

ted data can be of any length, but 8-bit data must be sent as two separate nybbles to ensure that the MSBs will be reset (0). Because of the potentially long data stream, Kawai requires a checksum for confirmation, but this is entirely up to the manufacturer. The data packet is closed by an *END OF EXCLUSIVE* byte, which lets the synthesizer get back to music processing. The bytes sent to the K-3 to set up a wave look like those shown in Example 8, below.

Data formats for send and for receive are identical, so two synthesizers can be hooked together for trading waveforms or waves can be sent to the computer, modified, and then sent back to the K-3.

Every manufacturer and synthesizer has a different format for system-specific commands. Consult synthesizer manuals for details.


Choosing a Synthesizer

If you will be testing your MIDI software by recording music in real time, you will need a keyboard or other source of MIDI note messages. If cost is a factor, look at Casio's CZ-101 (miniature keyboard) or CZ-1000 (larger version). In a slightly higher price bracket, the Kawai K-3 has a good performance-to-cost ratio. Yamaha has developed a wide range of FM instruments, and its DX-7 series is one of the best-selling series of synthesizers in the over-\$1,000 range. KORG also makes several affordable machines.

Example 6: Transmitting individual notes over MIDI

Example 7: A MIDI note stream

Example 8: Example data stream to initialize Kawai wave table

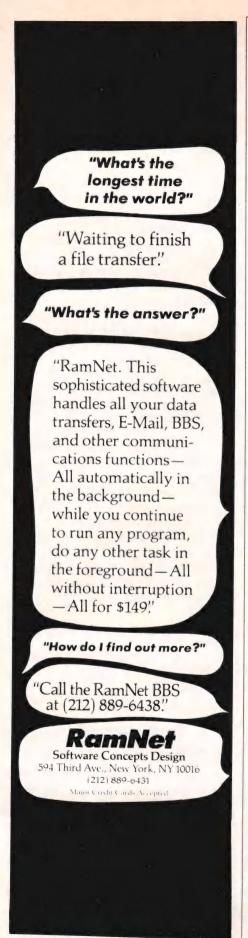

CIRCLE 393 ON READER SERVICE CARD

MUSIC RECORDER (continued from page 41)

If you are interested only in patch editors, or if you already own a MIDI keyboard, consider using a standalone sound generator. These are becoming more popular because one MIDI keyboard can control several slaved sound generators. Kawai has introduced a keyboardless version of its K-3 synthesizer, and Yamaha has just introduced a module (the FB-01) for less than \$400. Low-cost, rackmounted sampling units include the AKAI model S612 and the Ensoniq Mirage.

The eight-voiced FB-01 and the four-voiced Casio CZ-101 can both assign separate tone patches to each voice. In other words, a piano sound, a violin sound, and a horn sound can all be played at once. This is an advantage to software designers because the module can be made to respond like multiple synthesizers. It is difficult to assign or prioritize multiple voices with a single keyboard, so the Casio allows this MONO-MODE operation only when sounds are played and assigned by an external computer. The FB-01, of course, has no keyboard.

Synthesizer keyboards generally have nonweighted plastic keys. If you prefer a keyboard that feels more like an acoustic piano, you may want to invest in one of the higher-quality MIDI keyboard controllers, such as the Roland MKB-1000 or Yamaha KX-88. Because these are output-only keyboards (they have no sound-generation electronics), they must be used in conjunction with an external MIDI-controlled sound generator.

The sound of a synthesizer depends both on its electronics and on its programming, so it is impossible to categorize every type of instrument. There are some guidelines, however. Oscillators can be analog or digital. The difference is somewhat like comparing records and compact discs: digital oscillators are precise and they can produce a wide range of timbres, but some say that they lack the warmth of analog oscillators. Analog machines, such as the Roland, Moog, or Oberheim synthesizers, are known for producing rich string patches or resonant brass sounds.

Digital machines, such as the Yamaha line, excel at more percussive sounds, like pianos or bells. Samplers can capture breathy, human or flutelike voices. Musicians often use different types of synthesizers to cover different ranges of tonalities, but the ranges overlap quite a bit. Listen to as many patches as possible before making your choice.


SMPTE (and Other Time Codes)

Computerized recording is becoming popular, but the accepted medium for interchange of completed music is still audio tape. Tape is necessary for recording voices, guitars, and acoustic instruments and for transporting sounds between studios that have different types of synthesizers or drum machines. Synchronizing tape-based and computer-based recording media can be difficult. Fortunately, a solution to many of the problems already exists in the form of time code.

Time codes of various types have been in use for many years. They are used to lock audio recorders to video machines for movie sound tracks and for time stamping video tape for TV news. One of the most popular forms of time code was devised by NASA as a simple, fixed time reference for its experiments. It used recordable audio-range pulses in a format known as biphase modulation. Biphase uses clock transitions, rather than states of polarity, to encode binary data. This means that the output will never be a nonrecordable DC voltage. The 80-bit serial data stream encodes time as hours, minutes, seconds, frames, and subframes. The last two increments are arbitrary values that vary, depending on usage, but even this vague specification was sufficient to merit acceptance in a wide range of applications, especially video film. It has come to be known as SMPTE code, after the Society for Motion Picture and Television Engineers.

SMPTE code is based on a fixed timeof-day clock, rather than a variable rate, so it is not the ideal code for resolving the fine nuances of musical timing. Hardware synchronizers, incorporating complex frequency multipliers and phase-locking schemes, must be used to correlate MIDI tempo timing and SMPTE absolute timing.

HOW TO WRITE A WINDOWS APPLICATION IN TEN MINUTES.

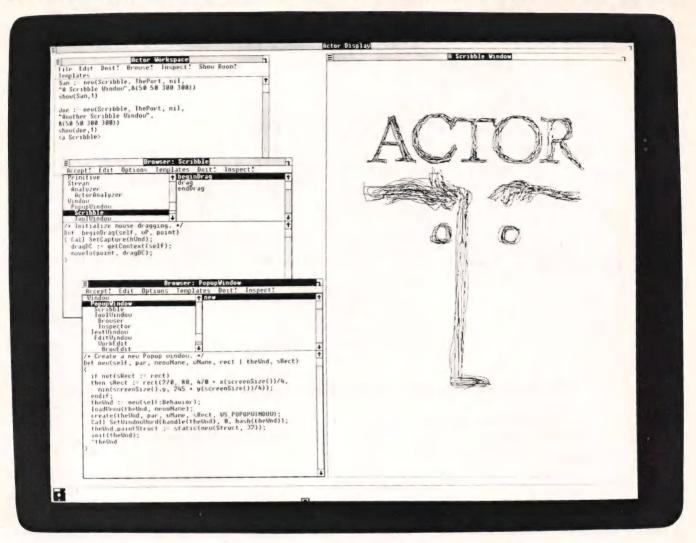

Actor™ is a new language that combines Microsoft® Windows with object-oriented programming. This means you can produce mouse and window applications very quickly.

For example, we created a simple "paint" program, and used it to draw the Actor logo you see on the screen. The whole program only took ten lines and ten minutes. Part of it is in the middle window on the left.

Above, you see the commands that initialized the paint window and made it appear on the screen. Below, some code that's built into Actor, specifying window behavior. Through a process known as "inheritance," it's called into play automatically.

Try programming in this new way, and you'll never go back.

Find out about Actor.
Call The Whitewater Group, (312) 491-2370.

Technology Innovation Center 906 University Place, Evanston, IL 60201

Turbo Tech Report Speaks Your Language.









The newsletter/disk publication for Turbo Pascal®users

Are you a devoted Turbo Pascal programmer, tired of reading about other languages? Are you looking for powerful utilities written in Turbo Pascal that you can use to develop software or incorporate into your programs? Are you interested in improving and expanding your Turbo Pascal programming skills?

Then you deserve a subscription to *Turbo Tech Report*. the bimonthly newsletter/disk publication from the publishers of *Dr. Dobb's Journal* and *Micro/Systems Journal*. Each issue delivers more than 250K of Turbo Pascal source code programs on disk, and 20+ pages of articles, Turbo Pascal software and book reviews, and analysis and commentary. It's the only publication delivering such focused technical articles with code on disk—and it doesn't waste your time with information about other programming languages. Each valuable issue contains:

- Articles on topics like speedy 3D graphics, mathematical expression parsers, creating global gotos, memory resident and AI applications and more—all written by Turbo experts.
- **Reviews** of the latest Turbo Pascal software programs from companies like Borland

International, Blaise Computing, Media Cybernetics, Nostradamus, TurboPower Software, and more!

- *News and commentary* detailing the latest products and developments in the Turbo Pascal programming community.
- A disk filled with Turbo Pascal code! You'll get the Turbo Pascal utilities and routines discussed in the newsletter's articles, as well as applications developed by Turbo users from around the world. You'll receive programs that make labels, generate menus, provide faster screen access, transfer files between CP/M and MS-DOS computers, and more!

If you're an expert Turbo Pascal programmer or a novice interested in expanding your Turbo skills, you need a publication that speaks your language: *Turbo Tech Report*. Subscribe today at the special price of just \$99—that's 33% off the regular price of \$150. To order by credit card, call toll-free 1-800-528-6050 ext. 4001 and ask for item 300. Or mail the attached coupon with your payment to *Turbo Tech Report*, 501 Galveston Drive, Redwood City, CA 94063.

Turbo Pascal is a trademark of Borland International Inc.

MUSIC RECORDER (continued from page 42)

Some of the first sync boxes for SMPTE-MIDI conversion were from Roland (SBX-80) and from Garfield Electronics. It is difficult to calculate rates and match-up points for the two time codes, so both of these units take the more practical approach of building a map of alignments as the time codes are received. The map is then stored to tape or to disk via MIDI.

An important step in the development of SMPTE-to-MIDI standards are the map formats being proposed by

If something is conspicuously absent on the sequencers you see, it is probably difficult to design.

SMPTE synchronizer manufacturers such as Adams-Smith. Adams-Smith's new Zeta 3 system allows commands from MIDI or RS-232 to control a tape machine or lets time codes from the tape machine be translated back to MIDI format. Two tape transports and a variety of sequencers and computers can be operated from a single Zeta 3 synchronizer. In actual operation, machines are synchronized by striping one of the tape tracks on each machine with SMPTE code. The tape controller reads these tracks and fine-tunes motor speeds on the transports. The Zeta 3 controller also outputs MIDI timing bytes to keep sequencers in step with the tape.

Another type of time code in common use is FSK, or frequency shift keying, which encodes 0s and 1s as two different frequencies. A major drawback to FSK is the lack of enough resolution to provide any form of embedded absolute time reference. FSK tapes must always be started from a known reference point because FSK is a relative timing reference.

Incorporation of SMPTE control or provision for some kind of sync-totape can be a big advantage when marketing software. It may only be necessary to stay compatible with support hardware marketed by other companies.

Summary

By providing a bridge between the music and computer industries, MIDI has sparked new interest in the design of innovative musical instruments. It has, in fact, created its own industry. Many competent software engineers are becoming interested in music because of this accessibility, and better products are being introduced every day.

Make sure you look at a few of the commercially available sequencers or patch editors before you start writing software. If you see something conspicuously absent on all the sequencers you encounter (such as a built-in universal patch editor), chances are that it is difficult to design. There are some imaginative designers working with MIDI, and some impossible things can be accomplished with a new approach or just a lot of work. Visit one of the larger music stores to find out what is currently on the market.

OASYS Solves the
Cross-Development Puzzle
Every Piece is in Place

68020+ 68881

Oasys offers the complete development solution Fast, Highly Optimized and Available

68020 + 68881 and 68000/10 Cross & Native Development Tools

COMPILERS

• C • C++ • Pascal • FORTRAN

MACRO ASSEMBLER/LINKERS

SIMULATORS

* SYMBOLIC DEBUGGERS

PERFORMANCE ANALYSIS TOOLS

* REAL-TIME OPERATING SYSTEMS

* LANGUAGE-SENSITIVE EDITORS

COMMUNICATIONS/DOWN-LOADING UTILITIES

Plus over 120 other software development tools including:

- Other Complete Tool-Kits Targeting:
 80386 plus 8086/186/286
 - NS32032
 - Fairchild Clipper
- C++ Object-Oriented C++ Translator
- OASYS PC Platform[™] 32-bit/2MB-16MB Co-Processor Board for IBM PC and Compatibles. 1-5 MIPS. UNIX and MS-DOS on the same System. Supports OASYS Tool-Kits.
- PC/Ada: Validated Ada® and APSE for IBM PC and Compatibles

TOOL-KITS

AVAILABLE FOR: OASYS

AVAILABLE FOR:
VAX/VMS/ULTRIX
SUN
APOLLO
GOULD
IBM PC
OASYS PC
PLATFORM™
...MANY MORE

- OASYS SERVICES:

 New ports easily arranged
- OEM, site and corporate licensing
- Training available

Let us help you solve your puzzle.

-A DIVISION OF XEL - 0 2 5 3 5

60 Aberdeen Avenue, Cambridge, MA 02138 (617) 491-4180

Trademarks are acknowledged to: U.S. Qovernment (AJPO), DEC, Microsoft, AT&T, and XEL, Inc.

Circle no. 254 on reader service card.

MICROWAY ACCELERATES YOUR PC!

FastCACHE-286™

Runs your PC Faster than an AT! Runs the 80286 at 9 or 12 MHz and the 80287 at 8, 9 or 12 MHz Includes 8 kbytes of 55ns CACHE



Compatible with Leading Edge Model D, Compag, and Turbo motherboards. Includes 8088 Reboot Switch, DCache, Print Spooler and Diagnostics... From \$449

LOTUS/INTEL EMS SPECIFICATION BOARDS

MegaPage™ The only EMS board which comes populated with two megabytes of cool-running, low power drain CMOS RAM installed Includes RAM disk, print spooler, disk cache and EMS drivers. For the IBM PC, XT and compatibles...\$549 MegaPage with ØK......\$149

MegaPage AT/ECC™ EMS card for the PC AT and compatibles includes Error Correction Circuitry. With ECC, 11 RAM chips cover 256K so the user never encounters RAM errors. Sold populated with 1 megabyte CMOS . . . \$699 or with 3 megabytes CMOS cool running low power drain RAM . . . \$1295. Optional serial/parallel daughterboard...... \$95

INTEL, JRAM, or Maynard..... CALL

NUMBER SMASHER/ECM™



12 MHz 8086/8087 Accelerator Plus

A Megabyte for DOS!


For the IBM PC, XT and compatibles PC Magazine "Editor's Choice"

8087 SOFTWARE

JOU JOI I WAI	
IBM BASIC COMPILER	. \$465
MICROSOFT QUICK BASIC	\$79
87BASIC COMPILER PATCH	. \$150
87BASIC/INLINE	. \$200
IBM MACRO ASSEMBLER	
MS MACRO ASSEMBLER	\$99
87MACRO/DEBUG	
MICROSOFT FORTRAN V4	
RM FORTRAN	. \$399
LAHEY FORTRAN F77 L	. \$477
MS or LATTICE C	
STSC APL★PLUS/PC	
STSC STATGRAPHICS	
SPSS/PC+	
87SFL Scientific Functions	. \$250
87FFT	
OBJ → ASM	
PHOENIX PRODUCTS	

AT8™

Turns your AT into a high speed, multiuser Xenix business system!



8 port, intelligent serial controller with 3% response degradation Includes 8 MHz 80186 with built in DMA \$1299

287 Turbo™-10/12



PC Magazine "Editor's Choice"

8087 UPGRADES

All MicroWay 8087s include a one year warranty, complete MicroWay Test Program and installation instructions.

8087 5 MHz.....\$114 For the IBM PC, XT and compatibles

8087-2 8 MHz.....\$154 For Wang, AT&T, DeskPro, NEC, Leading Edge 80287-3 5 MHz.....\$179

For the IBM PC AT and 286 compatibles

80287-6 6 MHz\$229 For 8 MHz AT and compatibles

80287-8 8 MHz\$259 For the 8 MHz 80286 accelerator cards and Compaq 386

80287-10 10 MHz.....\$395

PC-PAL[™] Programmer \$395 Call for great prices on V20, V30, 64K, 128K and 256K RAM

MICROWAY SOFTWARE FOR LOTUS 1-2-3™

FASTBREAK™ employs the 8087 to increase the speed of Lotus 1-2-3™ Version 1A or 1A*. Users are reporting speed ups of between 3 and 36 to 1. When run with our NUMBER SMASHER accelerator card, recalculation speed ups of 10 to 30 are being reported......\$79

PowerDialer® Add-In for Lotus 1-2-3 Release 2. Automated telephone dialing from within 1-2-3. Adds least cost routing, automatic carrier selection and automated phone book worksheet. Builds customized dialing applications. Can be used with DesqView \$79

HOTLINK™ adds easy linking of spreadsheets to Lotus 1-2-3 Version 1A., \$99

287 TURBO-PLUS™ Speeds up your AT

Adjustable 80286 Clock 6-12 MHz 10 MHz 80287 Clock Plus Full Hardware Reset.. Optional 80286-10..... \$175




287TURBO-PLUS

CALL (617) 746-7341 FOR OUR COMPLETE CATALOG

P.O. Box 79 Kingston, Mass. 02364 USA 617) 746-7341

You Can Talk To Us! MicroWay Europe 32 High Street Kingston-Upon-Thames Surrey England KT1 1HL Telephone: 01-541-5466



POWER TOOLS for SYSTEM BUILDERS™

1-800-543-6277

Ask for Operator 2053 California: 1-800-368-7600

TSF is owned and operated by programmers, so we understand your needs. We believe and practice integrity in all business dealings. We advertise real prices and offer the best possible terms to all customers. We provide prompt delivery of current product versions.

We carry only products which we have personally used or which come with strong recommendations from developers we respect. We have the technical capability and the interest to search for and find new products to meet your specific needs. We will gladly provide quotes for volume purchases or for products outside our normal product line. We consider it our job to help you get answers when publisher's technical support is unresponsive. At TSF service means more than a pushy sales pitch and a \$2 lower price.

We checks. Visa. accept Mastercard, American Express and COD. We charge your card only when we ship and do not add a surcharge. We provide free UPS delivery on software orders over \$100 (\$3 delivery charge on orders under \$100). Our COD fee is \$4. We allow return privileges on most products. Give us a try.

The Software Family

649 Mission Street San Francisco, CA 94 105 (415) 957-0111 1-800-543-6277 (U.S.) 1-800-368-7600 (Calif.) Askfor Operator 2053 on toll free calls

New! Supercharge Turbo Pascal

Mach2 from MicroHelp enhances Turbo Pascal with instant screen updates, windows, Ctrl-Break and DOS critical error trapping, flexible scrolling, Lotus-style menus and much more. Mostfunctions are written in assembler for lightning fast operation and low memory overhead. Mach2 gives Turbo Pascal programs the i/o performance and hardware error handling capabilities of well-written assembly language programs. No royalties. All source included. (List \$69) Only \$55 from TSF. 30 day money back guarantee.

New! Create Demos AND Applications

Screen Machine from MicroHelp lets you paint screens to create demonstration prototypes for selling and refining your programconcept. Any PC screen can be captured as a starting point or you can work from scratch. After finalize the concept, Screen Machine generates screen display code in Basic, Turbo Pascal, dBase II or III, or assembler (including support for Turbo Pascal and Basic Mach2 if desired). No royalties. All source included. (List\$79) Only \$63 from TSF. 30daymoney back guarantee.

New! Visual Command Language

Opalfrom The Software Factory lets you overcome MSDOS batch limitations. Run any sequence of MSDOS programs using control logic based on the system date and time, operator entry (including comprehensive prompting and editing), the existence of files or the contents of files. Acomprehensive but easy to use screen painter allows you to quickly generate menus providing cursor-key item selection with full control of display attributes. Complete with screen painter. Opal provides a cost effective alternative to custom written shells. Only \$79. 30 day money back quarantee.

New! Professional Hardware Diagnostics

Almost every PC user has wasted time and money due to mis-diagnosis, unnecessary hardware service calls or technicians arriving without necessary parts. Windsor Technologies now provides comprehensive, menudriven diagnosis software with detailed problem reports in English. With the Windsortools you can easily identify failed components and make sure that service technicians are called only when needed and that they know in advance what parts to bring. The service kits are used many national repair companies, work for IBM, clone and add-on components and inloude terminators for loopback testing of serial and parallel ports. The Windsor diagnostics let you provide the hardware expertise clients expect from you. Model T01 for PC/XT\$195. Model T51 for AT \$245, Model T91 for PC/XT/AT \$395, 30 day moneybackguarantee.

Send Or Call For Comprehensive Free Catalog

TSF carries a complete line of software and hardware tools for programmers and system engineers. We offer "big name" products at competitive prices and a large selection of hard-to-find products that save you hours of research, evaluation and development work. Our catalog includes hype-less product descriptions that explain what our products do to improve your productity and your product's quality. Call or send the coupon for your free copy.

munimum munimum m
Please send me a free catalog
Please send the following products:
Name: Address: City/State/Zip:
CreditCard: Exp:
Mail to: TSF, 649 Mission Street, San

mmmmmmmmmmm

MUSIC RECORDER (continued from page 45)

Availability

All the source code for articles in this issue is available on a single disk. To order, send \$14.95 to *Dr. Dobb's Journal*, 501 Galveston Dr., Redwood City, CA 94063 or call (415) 366-3600, ext. 216. Please specify the issue number and format (MS-DOS, Macintosh, Kaypro).

DDJ

Vote for your favorite feature/article. Circle Reader Service No. 3.

Resources

User's Groups

IMA (Intl. MIDI Association) 12543 Hortense Ave. Studio City, CA

IMUG (Intl. MIDI User's Group) P.O. Box 593 Los Altos, CA 94022

SMPTE (Society of Motion Picture and Television Engineers) 595 W. Hartsdale Ave. White Plains, NY 10607

Periodicals

Electronic Musician 2608 Ninth St. Berkeley, CA 94710 Subscription Dept.: 5615 Cermak Rd., Cicero, IL 60650

Keyboards Computers and Software 299 Main St. Northport, NY 11768

Keyboard Magazine P.O. Box 2110 Cupertino, CA 95015

Vendors

Adams-Smith 34 Tower St. Hudson, MA 01749 (617) 562-3801

AKAI Professional Div. P.O. Box 2344 Fort Worth, TX 76113

Casio Inc. 15 Gardner Rd. Fairfield, NJ 07006 (201) 575-7400

Doctor T's Music Software 220 Boylston, Ste. 306 Chesnut Hill, MA 02172 (617) 224-6954

E-Mu Systems Inc. 1600 Green Hills Rd. Scotts Valley, CA 95066 (408) 438-1921

Ensoniq Corp. 263 Great Valley Pkwy. Malvern, PA 19355 (215) 647-3930

Fairlight Instruments 2945 Westwood Blvd. Los Angeles, CA 90064 (213) 470-6280

Garfield Electronics P.O. Box 1941 Burbank, CA 91507 (213) 434-6643

Hybrid Arts Inc. 11920 W. Olympic Blvd. Los Angeles, CA 90064 (213) 826-3777 Jim Miller (Personal Composer) P.O. Box 648 Honaunau, HI 96726 (808) 328-9518

Kawai America Corp. 2055 E. University Dr., C.S. 9045 Compton, CA 90224-9045 (213) 534-2350

KORG USA Inc. 89 Frost St. Westbury, NY 11590 (516) 333-9100

Kurzweil Music Systems Inc. 411 Waverly Oaks Rd. Waltham, MA 02154-8464 (617) 893-5900

Lexicon Inc. 60 Turner St. Waltham, MA 02154 (617) 891-6790

Mark of the Unicorn 222 Third St. Cambridge, MA 02142 (617) 576-2760

Mimetics Corp. P.O. Box 60238, Station A Palo Alto, CA 94306 (408) 741-0117

Moog Electronics 2500 Walden Ave. Buffalo, NY 14225-4799 (716) 681-7242

New England Digital Corp. 49 N. Main P.O. Box 546 White River Junction, VT 05001 (802) 295-5800

Optical Media International P.O. Box 2107 Aptos, CA 94301 (408) 662-1772

Oberheim, A Division of ECC Development Corp. 11650 W. Olympic Blvd. Los Angeles, CA 90064 (213) 479-4948

Opcode Systems 444 Ramona St. Palo Alto, CA 94301 (415) 321-8977

Passport Designs Inc. 625 Miramontes St., Ste. 103 Half Moon Bay, CA 94019 (415) 726-0280

Roland Corp. US 7200 Dominion Circle Los Angeles, CA 90040-36477 (213) 685-5141


Sequential Circuits Inc. 3051 N. First St. San Jose, CA 95134 (408) 946-5240

Voyetra Technologies 426 Mt. Pleasant Ave. Mamaroneck, NY 10543 (914) 698-3377

Yamaha International Corp. 6600 Orangethorpe Ave. Buena Park, CA 90622 (714) 522-9011

Breaking the 640K DOS Barrier:

New version of Alsys PC AT Ada* compiler improves speed, adds application developer's guide, brings seven 80286 machines to latest validation status.



Alsys' landmark Ada compiler for the PC AT, the first to bring Ada to popular-priced microcomputers, has been upgraded to Version 1.2 with significant improvements.

The new version compiles faster than its predecessor, is validated for a full range of popular compatibles using the latest AJPO test suite 1.7, and includes a Developer's Guide in the documentation set. The price remains at \$2,995 for single units, including a 4 megabyte RAM board.

Both the original and the newly upgraded versions utilize the inherent capabilities of the 80286 chip and "virtual mode" to eliminate the 640K limitations of DOS. These techniques permit addressing up to 16 MB of memory, under the control of DOS, without changes to DOS in any way!

80286 machines validated in the new release include HP's Vectra, Compaq's Deskpro 286, Sperry's PC/IT, Zenith's 200 series (including the Z-248), Tandy's 3000 HD, the Goupil/40, and the IBM PC AT. The compiler supports DOS 3.0 or higher. Ada programs compiled on the AT will also run on PCs and XTs supporting DOS 2.1 or higher.

طاهر

ALSYS, INC., 1432 Main Street, Waltham, MA 02154

ADA NOW. Tell me more about the PC AT Ada compiler.

Name	
Title	
Company	
Address	
City	
State/Zip	
Phone/Ext	

DDJ 5/87

In the US: Alsys Inc., 1432 Main St., Waltham, MA 02154 Tel: (617) 890-0030

In the UK: Alsys Ltd., Partridge House, Newtown Rd., Henley-on-Thames, Oxon RG9 1EN Tel: 44 (491) 579090

In the rest of the world: Alsys SA, 29, Avenue de Versailles, 78170 La Celle St. Cloud, France Tel: 33 (1) 3918.12.44

*Ada is a registered trademark of the U.S. Government (AJPO). Alsys is the trademark of Alsys, Inc. References to other computer systems use trademarks owned by the respective manufacturers.

Prices refer to U.S. only. Contact Alsys for prices in other countries.

NOW AVAILABLE
NOW AVAILABLE
NOW AVAILABLE
Now Adaprobe
Adaprobe
Program Viewer and
Symbolic Debugger for
Symbo

Dimensional Data Types

by Do-While Jones

ack in the days when memory was expensive, computers were slow, and compilers weren't smart enough to optimize code, it was necessary to write concise, clever programs. The resulting programs were efficient, but they were cryptic, which made it difficult to modify the code without adding new bugs. Managers prized their few brilliant programmers who could write and maintain efficient code.

But then memory became cheaper, computers ran faster, compilers became better, and genius programmers started changing jobs whenever someone offered them more money. Managers discovered they were spending more money on software than they were on hardware.

The old values have changed. Compact code is no longer necessary or desirable. Instead, managers are looking for code that can be easily understood. This makes the code cheaper to validate and maintain and makes it possible for a team of programmers to work together efficiently and get their software product to the market (or battlefield) first. People who write programs that are so complex that nobody else can understand them are no longer an asset to an organization. The big money is now starting to go to people who can write clear code.

One way to make programs easier to understand is to use dimensional

Do-While Jones, 324 Traci Lane, Ridgecrest, CA 93555. Do-While is currently teaching Ada programming. He is a columnist for the Journal of Pascal, Ada, & Modula-2. The big money now goes to those who write clear code.

units (centimeters, grams, seconds, and so on) as data types. The bibliography lists some articles that show that there has been some interest lately in extending the syntax of high-level languages to include dimensional units.

You don't have to wait for someone to invent a new high-level language with built-in dimensional data types because one already exists. The Ada programming language has features that make it possible to invoke dimensional data types simply by referencing a library unit. But before I show you how, let me take a little time out to show you why people feel a need for dimensional units.

The Need for Dimensional Data Types

Example 1, page 51, shows a simple Ada program that could be used in a microprocessor-controlled radar speed gun. The program as it stands is perfectly legal, and presumably it would work if I added some instructions that really measured frequencies and showed the results on a display. This program is an example of bad programming practice, though, because it is difficult to validate and maintain.

If someone handed you Example 1 and asked you to determine if it were correct, could you? If someone asked you to change it so it gave answers in feet per second, how difficult would it be for you to make the change? What makes this program difficult to validate and maintain is the cryptic number 335,300,000. Where did it come from? What does it mean? Is it correct?

Example 1 is too short to do justice to the problem, though, as it contains only one equation. You can concentrate your attention on that one line, and if you can't figure it out, you can rewrite the whole program and you haven't lost much. In the real world, a tactical embedded computer program has dozens, or hundreds, or maybe thousands of equations. This complexity makes it much more difficult to figure out, and rewriting the program from scratch is out of the question. Although Example 1 doesn't show the magnitude of the problem, I hope it gives you an idea of the kind of difficulties that you can encounter when ambiguous data types such as float are used.

How Dimensional Data Types Help

If you write the program using dimensional units as data types, the ambiguity problem goes away. Not only that, the compiler can catch obvious mistakes at compile time.

Even though Example 1 uses descriptive variable names and there is no question in your mind what *SPEED* represents, you don't know if it is calculated in feet per second, miles per hour, or kilometers per hour. On the other hand, if the objects in the program were declared using dimensional units, you would know everything you needed to

know about them-for example:

TRANSMIT_FREQUENCY,

DOPPLER_FREQUENCY: Hertz; SPEED: Miles_per_hour;

The Ada programming language allows you to derive new data types from existing ones. Therefore you could say:

type Hertz is new float; type Miles_per_hour is new integer;

Then, assuming you had also declared *RECEIVED_FREQUENCY* to be of type *Hertz*, Ada would let you write this statement:

DOPPLER_FREQUENCY :=

RECEIVED_FREOUENCY -

TRANSMIT_FREQUENCY;

But if you had declared RECEIVED _FREQUENCY and TRANSMIT_FREQUENCY to be of type Megahertz and DOPPLER_FREQUENCY to be of type Kilohertz, then Ada would have rejected the preceding statement. The error message would have shown a dimensional-unit error at compile time.

Simply deriving new data types from existing numeric types is a step in the right direction, but it doesn't get you as far as you want to go. If I merely defined *Hertz* to be a new kind of floating-point number, then Ada would think it could multiply two objects of type *Hertz* together and get *Hertz* (instead of *Hertz* squared). Similarly, if I divided *Hertz* by *Hertz*, I should get a dimensionless floating-point number—not a result in *Hertz*.

The preceding paragraph shows some of the differences between dimensional quantities and simple scalar (dimensionless) numbers. Ada lets me define additional properties of dimensional data types that go beyond the scalar operations, but it won't let me undefine the operations that are valid for scalar objects but illegal for dimensional quantities. There is no way I can tell Ada that *Hertz* times *Hertz* doesn't give me an answer in *Hertz*.

Therefore, it isn't a good idea to derive dimensional data types from numeric data types. Fortunately, there is another way.

A Better Solution

Listing One, page 58, shows an Ada package that creates dimensional data types. Packages are standard Ada constructs that generally come in two parts. The package specification defines the available services, and the package body tells Ada how to implement those services.

The DIMENSIONAL_UNITS package specification defines two private data types called Integer_unit and Float_unit. As these are private types, they have only three legal operations:

- Assignment— You can assign a value to an object of this type.
- Equality— You can check to see if two objects of this type are identical.
- Inequality— You can check to see if two of these objects differ in any way.

All three of these operations are valid and useful for dimensional quantities, but clearly more operations need to be provided.

You can add two objects measured in feet and you will get an answer in feet, so addition must be defined. You can multiply an object in feet by a dimensionless number, and the result will be in feet. If you divide feet by feet you get a dimensionless number. You can check to see if one variable measured in feet is shorter than a second variable measured in feet. You will find all these operations (and more) in the DIMENSIONAL _UNITS package specification.

The DIMENSIONAL_UNITS package body is simple but lengthy. Fortunately, you have to compile it only once. Then it becomes part of your bag-of-tricks library, and you can access it with a one-line context clause. (Modern software professionals are trying to promote this kind of universal, reusable code.)

After I wrote this package, I started building a package called *WEIGHTS* _AND_MEASURES that would derive all possible dimensional units. It started out like this:

with DIMENSIONAL_UNITS; use
DIMENSIONAL_UNITS;
package WEIGHTS_AND_MEASURES is

type Inches is new Integer_unit; type Feet is new Integer_unit; type Yards is new Integer_unit; type Miles is new Integer_unit;

```
BADGUN. ADA
procedure Bad_Example is
 TRANSMIT_FREQUENCY, DOPPLER_FREQUENCY, SPEED : float;
  function Xmit_Frequency_Measurement return float is
  begin
    return 1.0; -- Machine specific code to measure frequency
                -- goes here
  end Xmit_Frequency_Measurement;
  function Doppler_Frequency_Measurement return float is
  begin
   return 1.0; -- Machine specific code to measure frequency
                -- goes here
  end Doppler_Frequency_Measurement;
  procedure put(N : integer) is
  begin
    null; -- Machine specific code to display an integer goes
          -- here
  end put;
begin
  TRANSMIT_FREQUENCY := Xmit_Frequency_Measurement;
  DOPPLER_FREQUENCY := Doppler_Frequency_Measurement;
  SPEED := 335.30e6 * DOPPLER_FREQUENCY / TRANSMIT_FREQUENCY;
  put(integer(SPEED));
end Bad_Example;
```

Example 1: An Ada program that demonstrates bad programming practice

DIMENSIONAL DATA TYPES (continued from page 51)

type Centimeters is new

Integer_unit;

end WEIGHTS_AND_MEASURES;

My intention was to start every program that needed dimensional quantities with a context clause invoking WEIGHTS_AND_MEASURES. A typical program would have looked like this:

with WEIGHTS_AND_MEASURES; use
WEIGHTS_AND_MEASURES;
procedure Main_Program is
X, Y, Z: Feet;
begin
(do something with X, Y, and Z)

end Main_Program;

The problem was that there are too many dimensional units to list them all and define the relationship to every other related quantity. Just look through any physics reference book, and you will find pages of conversions from one kind of unit to another. Even after discarding units I knew I would never use (such as cubic furlongs), there were still far too many to make a universal WEIGHTS_AND _MEASURES package practical. So, I now derive just the units I need for each program.

An Example

Listing Two, page 61, shows the speed gun program rewritten using better style. It consists of five individual compilation units: SPEED_GUN _UNITS (specification), HARDWARE _CIRCUITS (specification), Speed_Gun (main program body), SPEED_GUN _UNITS (body), and HARDWARE _CIRCUITS (body).

The first compilation unit (SPEED _GUN_UNITS) is the small, customized version of WEIGHTS_AND_MEASURES for this application. It defines only three dimensional data types: Miles_per_hour, Hertz, and Miles_per_second. The main program computes a speed in Miles_per_second but the answer is desired in Miles_per_hour, so the Type_Convert function is provided in this package to make the conversion. I didn't want to clutter the main program

with this type conversion, so I defined a special multiplication function that includes an automatic conversion from *Miles_per_second* to *Miles_per_hour*. A package specification of this type often contains special arithmetic operators that convert data types—for example, a division operator that divides *Feet* by *Seconds* and returns a value of type *Feet_per_second* is common.

The second compilation unit (HARDWARE_CIRCUITS) separates all the implementation-dependent code from the main program logic. If this were a real project (rather than an classroom exercise), I could write and

Programmers
should no longer
waste time
combining
constants—the
compiler should
do it.

debug my speed calculation while being blissfully ignorant of how some other guy was writing the code to measure frequency and display numbers. (Two of us would have trouble doing this with Example 1.)

The third compilation unit is the main program, and it looks a lot like Example 1, only easier to read. If I gave you the procedure $Speed_Gun$ instead of Example 1, you could see at a glance how I am computing SPEED. To validate it, you would only need to satisfy yourself that it is a correct rearrangement of the usual Doppler frequency equation— $fd = (2 \times speed \times fx)$ / (speed of light), where fd is the Doppler frequency and fx is the transmitted frequency.

If you compile the first three units in the order given, Ada will check for dimensional consistency automatically and tell you that there are no errors. Ada doesn't need units 4 and 5 until you ask it to link the modules to create an executable image.

The fourth compilation unit tells Ada how to implement the two functions defined in unit 1. Ada checks for consistency between the specification and the body to make sure they match. The functions are easily verified and could easily be tested separately from the *Speed_Gun* program.

Finally, the fifth unit shows how you can test software before the hardware is finished. I chose to simulate the inputs by prompting the user to enter some numbers from the terminal, but I could just as easily have made the unit read numbers from a disk file.

If someone were to really build the speed gun, all I would have to do would be to rewrite the HARDWARE _CIRCUITS package body (unit 5) and recompile it. Relinking Speed_Gun would then replace the terminal I/O with the new speed gun circuit interface. I would not have to change (or even recompile) the first four units. Note that the HARDWARE_CIRCUITS package could also be tested without Speed_Gun.

There are some test results at the end of Listing Two.

The Overhead Isn't as Bad as It Looks

Listing Two is longer than Example 1, and that might be a cause for some concern. To make the comparison fair, you have to ignore compilation unit 5 (because Example 1 leaves that part out), but even so it is clear there is some overhead (in terms of program lines) when using dimensional units. In this example the overhead is significant, but in practical programs it isn't as high. The overhead appears out of proportion here because the computational part of the example program is so trivial.

Consider this analogy. You might think it impractical to use a computer to keep track of your checkbook balance because the overhead would be too high. Every time you wrote a \$10 check, you would have to remove the dustcovers, turn on the computer, wait for the CRT to warm up and the hard disk to come up to speed, boot the operating system, load the checkbook balancing program, enter the data, copy the result to your checkbook, turn off the computer, and put the dustcovers back on. It would be easier just to subtract the \$10 on paper! But if you were running a bank, you wouldn't dream of keeping track of all of each customer's checking accounts with pencil and paper. The

WINDOWS FOR DATA™

The first choice of professional C programmers

"Windows for Data is the best programming tool I've ever used. It's the most flexible I've seen. Whenever I've wanted to do something, I've been able to find a way."

> Steven Weiss, Stratford Systems

Professionals choose our tools because they are designed, crafted, and supported for professionals. Here at Vermont Creative Software, we understand that performance and pleasure in programming derive from more than a long list of functions. **Windows for Data** provides:

PROFESSIONAL FLEXIBILITY:

Our customers repeatedly tell us how they've used WFD in ways we never imagined - but which we anticipated by designing WFD for unprecedented adaptability. Virtually every capability and feature can be modified to meet special needs. You will be amazed at what you can do with WFD.

PROFESSIONAL PERFORMANCE:

Screen output is crisp and fast. Windows, menus, and data-entry forms snap up and down from the screen. WFD is built upon and includes Windows for C, the windowing system rated #1 in speed and overall quality in PC Tech Journal (William Hunt, July 1985).

PROFESSIONAL RELIABILITY:

An unreliable tool is worse than no tool at all. VCS products are known in the industry for their exceptional reliability. Ask anyone who owns one.

PROFESSIONAL DOCUMENTA-

TION: Over 600 pages of documentation provide step-by-step explanations for each major application, a reference page for each function, listings of functions alphabetically and by usage, and a fully cross-referenced

index. Extensive tutorials and demonstration programs assist learning.

PROFESSIONAL TECHNICAL SUPPORT: The same expert programmers that develop our products provide prompt, knowledgeable technical support.

PROFESSIONAL PORTABILITY: High-performance versions of VCS products are available for XENIX, UNIX, and VMS, as well as DOS. No royalties on end-user applications.

OUR CHALLENGE AND GUARANTEE

If you have an application where no other tool can do the job, try **Windows for Data**. If it doesn't help you solve your problem, RETURN FOR A FULL REFUND. YOU MUST BE SATISFIED.

Ask for FREE DEMO DISKETTE



Vermont Creative Software

21 Elm Ave. Richford, VT 05476 Telex: 510-601-4160 VCSOFT **Tel.: 802-848-7738**

Prices: PCDOS* \$395; XENIX, VMS, UNIX Call. *PCDOS specify C compiler.

WINDOWS FOR DATA

for DOS, UNIX, VMS ...

The complete windowing data entry, menu, and help system that does the hard job others can't — we **guarantee** it!

Pop-up data entry windows; field types for all C data types, plus decimals, dates, and times; auto conversion to and from strings for all field types; system and user supplied validation functions; range checking; required, must-fill, and protected fields; free-form movement; multiple-choice field entry; scrollable sub-forms. Branch and nest windows, forms, and menus.

Complete context-sentitive help system with pop-up windows and scrollable text.

Pop-up, pull-down, scrollable, and Lotusstyle menus.

NEW FOR DEBUGGING: Exclusive VCS Error Traceback System automatically identifies the location and cause of program errors. Eliminates the need to code error checks on all function calls! VCS Memory Integrity Checking helps catch those hard-to-detect, memory-corruption errors.

NEW FOR ERROR HANDLING: Install your own error handler to be called whenever a function detects an error.

NEW FORM LAYOUT UTILITY simplifies form design.

DIMENSIONAL DATA TYPES (continued from page 52)

same overhead would still exist (you would still have to take off the dust-covers and turn on the computer), but it would now be a small part of the whole process.

Practical embedded computer programs are so much more complicated than the speed gun example that the few extra lines needed to invoke a WEIGHTS_AND_MEASURES package are negligible.

Listing Two Can Be as Efficient as Example 1

Example 1 simply multiplies a ratio by a predetermined conversion constant, but Listing Two appears to compute that conversion constant at run time by dividing the speed of light by 2 and then multiplying by 60 twice. If it really did that, Listing Two would run much slower than Example 1. An old FORTRAN-IV compiler might have optimized Listing Two by storing the speed of light and the numbers 2 and 60 in registers instead of memory to make the program fast-

er. Modern compilers are smarter than that. A good Ada compiler can recognize that all those constants can be combined at compile time and should generate exactly the same code for Listing Two as it would for Example 1 (if the terminal I/O simulation code was added to Example 1). Programmers should no longer waste time combining constants because the compiler should do it anyway. Combining constants just obscures the source code.

Conclusion

Listing Two probably seems radical to those who first learned to program a computer in the 60s (as I did). But we have to realize that the old values have changed. Now the most important feature of a program is that it be easily understood so it can be easily debugged, validated, and maintained. The use of dimensional units as data types is an important technique to adopt because it helps preserve the sense of the program.

Availability

All the source code for articles in this

issue is available on a single disk. To order, send \$14.95 to *Dr. Dobb's Journal*, 501 Galveston Dr., Redwood City, CA 94063 or call (415) 366-3600, extension 216. Please specify the issue number and format (MS-DOS, Macintosh, Kaypro).

Bibliography

Jones, Do-While. "Readers' Forum." Journal of Pascal, Ada, & Modula-2, vol. 4, no. 1 (January/February 1985). Manner, R. SIGPLAN Notices (March 1986).

Swaine, Michael. "Swaine's Flames." DDJ (August 1986).

DDJ

(Listings begin on page 58.)

Vote for your favorite feature/article. Circle Reader Service No. 4.

PC Scheme—

sterner a simple, modern LISP for under \$100.

Texas Instruments presents PC Scheme, the \$95* solution to your symbolic processing needs.

Whether you're an experienced LISP user, or just beginning to discover the power of symbolic programming languages, PC Scheme is the right product for you. It runs on IBM® Personal Computers, as well as the TI Professional Computer family, including the Business-Pro™ computer.

Powerful features include an optimizing incremental compiler for ease of programming and fast execution; an EMACS-like editor; extensions for debugging, graphics, and windowing; DOS-CALL capability; and a programming system for the development of object-oriented

applications—all designed to work efficiently on personal computers.

To order, or for more information, call toll-free:

1-800-527-3500

*Suggested list price.
Business-Pro is a trademark of Texas Instruments Incorporated.
IBM is a registered trademark of International Business
Machines Corporation.



Creating useful products and services for you.

© 1986 TI 261765-02A

SAS Institute Inc. Announces

Lattice C Compilers for Your IBM Mainframe

Two years ago...

SAS Institute launched an effort to develop a subset of the SAS® Software System for the IBM Personal Computer. After careful study, we agreed that C was the programming language of choice. And that the Lattice® C compiler offered the quality, speed, and efficiency we needed.

One year ago...

Development had progressed so well that we expanded our efforts to include the entire SAS System on a PC, written in C. And to insure that the language, syntax, and commands would be identical across all operating systems, we decided that all future versions of the SAS System—regardless of hardware—would be derived from the same source code written in C. That meant that we needed a C compiler for IBM 370 mainframes. And it had to be good, since all our software products would depend on it.

So we approached Lattice, Inc. and asked if we could implement a version of the Lattice C compiler for IBM mainframes. With Lattice, Inc.'s agreement, development began and progressed rapidly.

Today...

Our efforts are complete—we have a firstrate IBM 370 C compiler. And we are pleased to offer this development tool to you. Now you can write in a single language that is source code compatible with your IBM mainframe and your IBM PC. We have faithfully implemented not only the language, but also the supporting library and environment.

Features of the Lattice C compiler for the 370 include:

- Generation of reentrant object code.

 Reentrancy allows many users to share the same code. Reentrancy is not an easy feature to achieve on the 370, especially if you use non-constant external variables, but we did it.
- Optimization of the generated code. We know the 370 instruction set and the various 370 operating environments. We have over 100 staff years of assembler language systems experience on our development team.
- Generated code executable in both 24-bit and 31-bit addressing modes. You can run compiled programs above the 16 megabyte line in MVS/XA.
- Generated code identical for OS and CMS operating systems. You can move modules between MVS and CMS without even recompiling.
- Complete libraries. We have implemented all the library routines described by Kernighan and Ritchie (the informal C standard), and all the library

routines supported by Lattice (except operating system dependent routines), plus extensions for dealing with 370 operating environments directly. Especially significant is our byte-addressable Unix*-style I/O access method.

■ Built-in functions. Many of the traditional string handling functions are available as built-in functions, generating in-line machine code rather than function calls. Your call to move a string can result in just one MVC instruction rather than a function call and a loop.

In addition to mainframe software development, you can also use our new cross-compiler to develop PC software on your IBM mainframe. With our cross-compiler, you can compile Lattice C programs on your mainframe and generate object code ready to download to your PC.

With the cross-compiler, we also offer PLINK86™ and PLIB86™ by Phoenix Software Associates Ltd. The Phoenix link-editor and library management facility can bind several compiled programs on the mainframe and download immediately executable modules to your PC.

Tomorrow...

We believe that the C language offers the SAS System the path to true portability and maintainability. And we believe that other companies will make similar strategic decisions about C. Already, C is taught in most college computer science curriculums, and is replacing older languages in many. And almost every computer introduced to the market now has a C compiler.

C, the language of choice...

C supports structured programming with superior control features for conditionals, iteration, and case selection. C is good for data structures, with its elegant implementation of structures and pointers. C is conducive to portable coding. It is simple to adjust for the size differences of data elements on different machines.

Continuous support...

At SAS Institute, we support all our products. You license them annually; we support them continuously. You get updates at no additional charge. We have a continuing commitment to make our compiler better and better. We have the ultimate incentive—all our software products depend on it.


For more information...

Complete and mail the coupon today. Because we've got the development tool for your tomorrow.

SAS.

SAS Institute Inc. SAS Circle, Box 8000 Cary, NC 27511-8000 Telephone (919) 467-8000 x 7000

 □ the C compiler for MVS □ the C compiler for CMS □ the cross-compiler with I 	software developers software developers PLINK86 and PLIB86	
todayso l'il be r	eady for tomorro	w.
Please complete or attach yo	our business card.	
Name		
Title		
Company		
Address		
	Chata	ZIP
City	State	

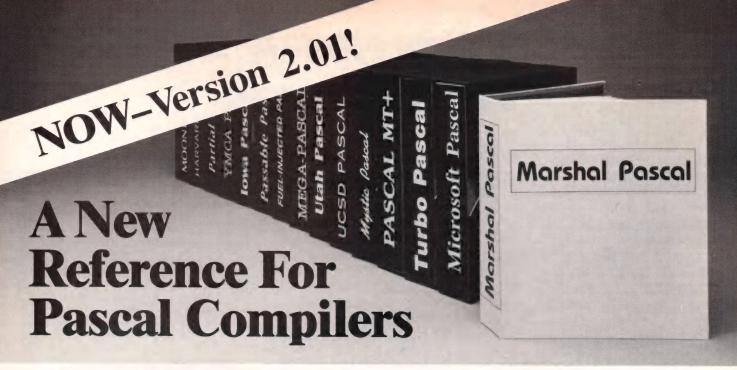

	Ack	erman	Sie	eve]	I/O	Gaus	ss-Seidel	Floatin	ng Point
Marshal Pascal	11.9	3.5K	4.8	2.4K	1.8	5.1K	4.9	11.5K	10.5	3.2K
IBM Pascal	12.4	34.7K	11.7	27K	2.5	24.5K	7.6	34.6K	10.5	21K
Turbo Pascal	22.7	11.6K	14.2	11.5K	2.2	12.5K	4.7	13.5K	28	11.4K
Oregon Pascal-2	18.2	13.9K	7.2	11.7K	2.5	22K	11.8	37.6K	139.7	26.8K
Microsoft C 4.0	15.9	9.3K	5.8	6.5K	1.9	8.9K	6.0	23.6K	33	19.6K
	Sec.	Code Size	Sec.	Code Size	Min.	Code Size	Sec.	Code Size	Sec.	Code Size

Unparalleled Speed and Power

Marshal Pascal™ is the most highly code-optimized Pascal compiler for PCs. Period. In fact, Marshal Pascal produces code so fast and compact that even the most efficient C compilers fall behind in performance. Also, Marshal Pascal is an ISO implementation, thus offering portability to other computer environments. You may address as much memory as your operating system allows and a variety of memory models are supported. Among the useful extensions included are: separate compilation of modules (both Modula-2 and Pascal forms), structured constants and structured function values, variable-length string types and procedural parameters.

Turbo Pascal® Translator/Optimizer

Our translator/optimizer shrinks Turbo Pascal software enormously. You can watch your present Turbo programs run in a fraction of their former time and code space!

8087-80287 Support

Marshal Pascal supports the Intel 8087-80287[®] math processors *inline*. If you don't have the math chip, then '87-287 code simulation is a provided option.

Marshal Language Systems

1136 Saranap Ave., Ste. P, POB 2010, Walnut Creek, CA 94595

Microsoft Linkability

Marshal Pascal's true relocatable linker allows you access to the Microsoft family of languages and assemblers. A flexible object code librarian and powerful overlay capabilities are also included.

Powerful Compile Options

Marshal Pascal gives you a number of compile options, including an optimization by-pass for speedier compiles, I/O "fine-tuning", constant folds and a syntax evaluator just to name a few. A wealth of compile-time checks permits you to find the more subtle logic errors, reducing debugging time enormously.

Efficient Large Heap Model for AI Applications

Marshal Pascal gives users efficient dynamic allocation for symbolic processing in AI applications. Marshal Pascal also allows functions to return arbitrary structured types. This can be used to combine the efficiency of Pascal with the powerful functional programming style enjoyed by such languages as LISP.

The Price? \$189, includes everything.

Supports PC-DOS*, MS-DOS*, CP/M-86*, Concurrent DOS*, and soon Xenix 286/386*!

To order your copy of Marshal Pascal, call: (800) 826-2222 In California: (415) 947-1000

Marshal Pascal is a TM of Marshal Language Systems. Pascal MT + , CP/M-86 and Concurrent DOS are © of Digital Research, Inc. IBM Pascal, PC-DOS are © of IBM Corp. Turbo Pascal is a © of Bortand International, Inc. Microsoft GTM, Microsoft C, MS-DOS and Xenix are © of Microsoft Corp. Mystic Pascal is a ® of Mystic Canyon Software. Intel 8087/80287 is a TM of Intel Corp. UCSD Pascal is a TM of Pecan Software Systems. Utah Pascal is a TM of Ellis Computing, Inc. Pascal-2 is a TM of Oregon Software.

CIRCLE 317 ON READER SERVICE CARD

BETTER THAN BUFFERS!

PrintQ

- Automatically spools all printfiles to DISK, not RAM
- Pop-up status display provides full control over PrintQ
- Storage capacity measured in MEGABYTES, not kilobytes
 - Printfiles are not lost when power is lost
- Ability to hold any printfile for reprinting next week, or next year.

PrintQ is print spooling software that lets you do all this and more, without adding any hardware!

Feature	PrintQ	Buffers
A complete Print Spooler like those used on mainframe and minicomputer systems	YES	NO
Automatically spools printer or plotter data to disk, not RAM	YES	NO
Each printfile kept separate	YES	NO
Allows control of report printing Re-start printing at any page Print reports in any order Automatically print multiple copies Prompt for form changes Prompt for forms alignment Hold for later printing Cancel printing at any time	YES YES YES YES YES YES YES YES YES	NO NO NO some NO NO NO some
"Pop-up" Status Display to control printing at any time	YES	NO
View reports on the screen before, during or after printing	YES	NO ·
Save printed reports (archive) for reprinting	YES	NO
Works with GRAPHICS software	YES	some
Select any printer port	YES	NO
Capture reports to ASCII file	YES	NO
Programmable using batch (.BAT) file commands	YES	NO
Price	\$89	\$\$\$.\$\$

SEND IN THE Q-PON, OR Call: 1-800-346-7638 In New Jersey Call 201-584-8466

FOR: IBM PC, XT AT & ALL 100% COMPATIBLES. USES 46K RAM.

IBM is a registered trade mark of International Business Machines Corporation

CRITICS CHOICE!

"PrintQ is without a doubt the most sophisticated print spooler for the PC I've seen . . . the Rolls-Royce of print spoolers. PrintQ will quickly repay its \$89 list price."

-PC Magazine

"Using PrintQ could become very addicting, and users may never want to go back to ordinary printing again."

-PC Week

"PrintQ is not the average print spooler. . . the PrintQ menu screen lets you customize printing in several ways. If you're like me, you will decide that this freedom is worth its weight in saved time and money."

-PC Products

30 Day money back guarantee!

Not copy protected

Only \$89



Software Directions, Inc. 1572 Sussex Turnpike, Randolph, NJ 07869

YES! Rush me PrintQ for just \$89 which includes postage and handling (Canada add \$10-other foreign add \$20). If I'm not convinced PrintQ saves time, increases productivity and enhances printer function, I'll return it within 30 days for a full refund.

Name

Company Address

> City Zip

> > Acct. No.

Phone

☐ MasterCard

□ Visa Exp. date

State

□ AmEx.


Q-PO

Signature

☐ Check enclosed.

NJ residents add 6% sales tax

DDJ 5/87



Programmers:

Turbocharge your productivity with PL/PC

PL/PC is a new programming language based in large part on APL (A Programming Language) with Modula-2 control structures. It offers an integrated interactive programming environment for the rapid implementation of applications.

Structured programming is supported with Modula-2 control structures, block structured declaration of subroutines and automatic paragraphing of subroutines. Multi-dimensional arrays are easily manipulated with the large set of PL/PC array operators. Fundamental data types are extended to include complex numbers and strings. A full-featured full screen text editor is included, the editor will automatically position the cursor at the point in the source code where the last compile-time or run-time error was detected. Data are edited with a spreadsheet like data editor. English keywords are used instead of APL symbols, eliminating the requirements for special keyboard, character generator and printer. DOS files can be structured to be manipulated as a single data item of any dimension or data type. Graphic applications are supported with routines to draw lines, points, polygons, circles, conic sections and manipulation of data to/from screen. Debugging facilities include tracing, stopping, single-stepping, timing and profiling.

A demonstration version is available for US\$16. The demo version comes with a reference manual and it has a limit of six global variables. The standard version is priced at US\$89 and the 8087 version at US\$159. All prices include airmail postage and handling.

PL/PC requires an IBM PC or compatibles with at least 360K of memory and DOS $2.11\ \mbox{or}$ higher.

Creative Computer Software

117 York St., Sydney, NSW 2000, Australia. Phone: (02) 261 1611 Fax: (02) 264 7161

CIRCLE 348 ON READER SERVICE CARD

PRODUCTIVITY TOOLS In C and Fortran-77

PLOTHP Plotting routines for Hewlett-Packard & HPGL compatible plotters. Available in FORTRAN-77 & C. Full source & manual included.

PLOTHI Plotting routines for Houston Instruments DM/PL compatible plotters. Available in FORTRAN-77 & C. Full source & manual included.

GRAFLIB FORTRAN-77 & C callable screen gra-\$175.00 phics routines. Full source & manual included.

\$125.00 FORTRAN-77 enhancement routines for various MS-DOS FORTRAN compilers. Full source & manual included.

Call or Send For a Catalog:

No Royal TIES

SUTRASOFT

P. O. Box 1733 Sugar Land, TX 77487-1733 (713) 491-2088

CIRCLE 395 ON READER SERVICE CARD

DIMENSIONAL DATA TYPES

```
Listing One (Text begins on page 50.)
 Listing One
                                                 DUNITS.ADA
                                                 1 JANUARY 1986
                                                 1 JANUARI 1966
DO-WHILE JONES
324 TRACI LANE
                                                 RIDGECREST, CA 93555
(619) 375-4607
 package DIMENSIONAL UNITS is
  -- This package provides useful parent types for derived -- dimensional units. That is, it makes it possible to -- do this:
           type Feet is new Integer Unit;
type Radians is new Float Unit;
           PI : constant Radians := Type_Convert(3.14159);
TARGET RANGE : Feet;
                                               Radians:
           ANGLE
           REVOLUTIONS : integer;
  -- These derived data types will inherit all the operations -- in the package below. These are all the operations which -- make sense for dimensional quantities.
  -- The modulo operation for Float_Units is provided to make -- it easy to normalize angular measurements.
           ANGLE := ANGLE mod (2.0 * PI);
  -- The division operator for Float Units which return INTEGERS -- truncates toward zero (rather than rounding) to make it
                                                                                                                     consistant
  -- with integer division, and it lets you do this:
           REVOLUTIONS := ANGLE / (2.0 * PI);
   type Integer Unit is private;
   function Type_Convert(X : integer) return Integer Unit;
-- Lets you assign values to dimensional objects.
-- For example,
        -- TARGET RANGE := Type Convert (587);
 function "+"(RIGHT : Integer_Unit)
return Integer Unit;
function "-"(RIGHT : Integer_Unit)
return Integer Unit;
function "abs"(RIGHT : Integer_Unit)
return Integer Unit;
function "+"(LEFT, RIGHT : Integer_Unit)
return Integer Unit;
function "-"(LEFT, RIGHT : Integer_Unit)
return Integer Unit;
function "-"(LEFT, RIGHT : Integer_Unit)
return Integer Unit;
function "-"(LEFT : Integer; RIGHT : Integer_Unit)
return Integer_Unit;
function "-"(LEFT : Integer; RIGHT : Integer_Unit)
return Integer_Unit;
function "-"(LEFT : Integer_Unit; RIGHT : integer)
return Integer_Unit;
  function "*"(LEFT: Integer_Unit; RIGHT: integer)
  return Integer_Unit;
function "/"(LEFT: Integer_Unit; RIGHT: integer)
  return Integer_Unit;
function "/"(LEFT, RIGHT: Integer_Unit)
  return integer;
function "/"(LEFT, RIGHT: Integer_Unit)
  function "/"(LEFT, RIGHT: INTEGET_UNIT)
return float;
function "rem"(LEFT, RIGHT: Integer_Unit)
return Integer Unit;
function "mod"(LEFT, RIGHT: Integer_Unit)
return Integer Unit;
function Dimensionless(LEFT: Integer_Unit)
return integer;
   return integer;
function Dimensionless(LEFT: Integer Unit)
       return float:
  -- "=" and "/=" are already defined for private types function "<"(LEFT, RIGHT : Integer_Unit) return boolean; function "<=" (LEFT, RIGHT : Integer_Unit) return boolean; function ">" (LEFT, RIGHT : Integer_Unit) return boolean;
   return boolean;
function ">=" (LEFT, RIGHT : Integer Unit)
       return boolean;
  type Float_Unit is private;
  function Type_Convert(X : float) return Float Unit;
-- Lets you assign values to dimensional objects.
-- For example,
       -- ANGLE := Type_Convert (3.14159);
   function "+" (RIGHT : Float_Unit)
  return Float Unit;
function "-"(RIGHT: Float Unit)
return Float Unit;
function "abs"(RIGHT: Float Unit)
function "abs"(RIGHT: Float Unit)
 return Float Unit;
function "+"(LEFT, RIGHT : Float_Unit)
return Float Unit:
function "-"(LEFT, RIGHT : Float_Unit)
return Float_Unit;
```

(continued on page 61)

Quaid Analyzer the tool that created CopyWrite

Now you can debug your own programs with a professional quality debugger - the one that unraveled every form of copy-protection used on the PC.

With the Quaid Analyzer, you can:

- See occurrences of any interrupt, with its meaning shown on the screen.
- ☐ View memory as text or instructions, scrolling as easily as you do with an editor.
- Run until a memory location or I/O port is changed.
- Protect your hard disk from accidental destruction.
- Analyze software without the source, even when it uses countermeasures to thwart tracing.
- ☐ See all stages of the boot load.

We kept the Quaid Analyzer off the market to avoid helping publishers with copy-protection. Now that copy-protection is gone, we can sell it to you.

The Quaid Analyzer is a software tool occupying 100K bytes. It runs on any IBM PC and most MS-DOS systems without hardware modification.



Call (416) 961-8243

Quaid Analyzer \$99 U.S.

All orders shipped at our expense within a day. All major credit cards accepted. or return coupon to: 45 Charles St. East Third Floor, Dept. 604 Toronto, Ontario. M4Y 1S2

Payment method	MC-Visa-Amex-Diners-Check
----------------	---------------------------

Address _____

City/State ______Phone No. ______Signature _____



Quaid Software Limited

Ask about Disk Explorer the program that takes over where Quaid Analyzer leaves off.

8031

FORTH DEVELOPMENT ENVIRONMENT

Take advantage of Bryte's tools to make your job easier:

- Bryte's development environment uses BRYTE-FORTH on the actual production hardware during product development. No emulators, no changes, no surprises.
- Optional PC-based cross-development tools use DOS files as microcontroller mass storage. These files can be used to generate compact EPROM images, detailed listings, and cross-references.

Why not start developing the Bryte way today?

BRYTE-FORTH 8031 EPROM (includes 130 page User's Manual)
Utility disk(s) 65.00*
Cross-compiler/Cross-assembler 235.00*
8031 unlimitted quan. license 1000.00*

* Includes complete source code

bryte computers, inc.

P.O. Box 46 Augusta, ME 04330-0046

207/547-3218

CIRCLE 387 ON READER SERVICE CARD

Parallel Programming for "C"

INTERWORK

A Concurrent Programming Toolki

Interwork is a "C" program library which allows you to write your programs as a set of cooperating concurrent tasks. Very useful for simulation, real-time applications, and experimentation with parallel programming.

FEATURES

- Supports a very large number of tasks (typically more than 100) limited only by available memory. Low overhead per task results in very fast context switching.
- Provides a full set of inter-task communication (ITC) facilities, including shared memory, locks, semaphores, blocking queues, and UNIX*-style signals. Also has building blocks for constructing your own ITC facilities.
- Handles interrupts (DOS version) and integrates them into task scheduling. Supply your own interrupt handlers or block tasks on interrupts.
- Lets you trace task switches and inter-task communication.
- Comes with complete documentation including a user's manual and reference manual of commands.

Interwork is available for the following systems:

 Hardware
 Operating System
 Price

 IBM PC, XT, AT
 PC-DOS 2.0 or later
 \$129

 IBM PC AT
 XENIX*
 \$159

 DEC VAX*, SUN III
 UNIX 4.2BSD
 \$249

PC-DOS version is compatible with DeSmet, Lattice, and Microsoft C compilers.

Please specify hardware and operating system when ordering. Shipping and handling included; COD orders add \$2.50. Send check or money order to:



Block Island Technologies

Innovative Computer Software

13563 NW Cornell Road, Suite 230, Portland, Oregon 97229-5892 (503) 241-8971

*Trademarks: UNIX, AT&T Bell Laboratories, Inc.; XENIX, Microsoft, Inc.; VAX, Digital Equipment Corporation

CIRCLE 263 ON READER SERVICE CARD

ATRAINING COURSE FOR PEOPLE WHO LUST AFTER POWER.


Intel is offering three new courses on the world's most powerful 32-bit microprocessor—the 80386. Plus a new intensive course on the 80286.

These in-depth learning sessions are designed for engineers and programmers who want to utilize the full power and potential of these lightning-fast chips.

Lectures are combined with hands-on workshops to provide real-life situations. Allowing you to apply new concepts and techniques immediately.

Courses include:
80386 System Software
80386 Programming using ASM386
High-end Microprocessor Hardware
Design

The new 80286 Microprocessor Family Course



The 80386

Complete training sessions and courses can be scheduled at your facility, or at our training centers. In addition to training, Intel offers hardware/software support and

consultants.

For more complete course information and schedules, call toll-free (800) 548-4725.

Or to register now, contact one of the Intel Training Centers listed below

Intel Training Centers

Boston Area, Westford Corp. Ctr. Three Carlisle Road, 1st Floor Westford, MA 01886 (617) 692-1000

Chicago Area 300 N. Martingale Road, Suite 300 Schaumburg, IL 60194 (312) 310-5700 San Francisco Area 2700 San Tomas Expressway Santa Clara, CA 95051 (408) 970-1700

Washington, D.C. Area 7833 Walker Drive, 5th Floor Greenbelt, MD 20770 (301) 220-3380



DIMENSIONAL DATA TYPES

Listing One (Listing continued, text begins on page 50.)

```
function "*" (LEFT : integer; RIGHT : Float Unit)
    return Float Unit;
function "*"(LEFT: Float Unit; RIGHT: integer)
    return Float Unit;
function "*"(LEFT: float; RIGHT: Float_Unit)
return Float Unit;
function "*"(LEFT: Float_Unit; RIGHT: float)
    function "#" (LEFT: Float_Unit; RIGHT: integer)
return Float Unit;
function "/" (LEFT: Float_Unit; RIGHT: integer)
return Float Unit;
function "/" (LEFT: Float_Unit; RIGHT: float)
    runction "/"(LEFT: Float_Unit; RIGHT: I
return Float Unit;
function "/"(LEFT, RIGHT: Float_Unit)
return integer: -- trucates toward zero
function "/"(LEFT, RIGHT: Float_Unit)
    function "/"(LEFT, RIGHT: Float_Unit)
return float;
function "rem"(LEFT, RIGHT: Float_Unit)
return float Unit;
function "mod"(LEFT, RIGHT: Float_Unit)
    return Float Unit;
function Dimensionless(LEFT: Float_Unit)
return integer;
function Dimensionless(LEFT: Float_Unit)
return float;
    -- "-" and "/-" are already defined for private types function "<" (LEFT, RIGHT : Float_Unit) return boolean; function "<-" (LEFT, RIGHT : Float_Unit)
    return boolean;
function ">"(LEFT, RIGHT : Float Unit)
    return boolean;
function ">="(LEFT, RIGHT : Float_Unit)
        return boolean;
-- The following don't have any application to dimensional -- problems. I almost hid them in the package body, but I -- thought that since I needed them to derive some of the
-- Float Unit operations someone else might need them, too.
    function "/"(LEFT, RIGHT : float) return integer;
-- divide and truncate toward zero
    function "rem" (LEFT, RIGHT : float) return float;
    function "mod" (LEFT, RIGHT : float) return float;
    type Integer_Unit is new integer;
type Float_Unit is new float;
end DIMENSIONAL UNITS;
```

End Listing One

Listing Two

```
-- This is an example of how the use of dimensional units as data -- types improves program clarity.
                                            DUEX.ADA
                      ----- Compilation Unit 1 -----
with DIMENSIONAL UNITS; use DIMENSIONAL UNITS; package SPEED_GUN_UNITS is
    type Miles per hour is new Integer_Unit;
type Hertz is new Float_Unit;
type Miles_per_second is new Float_Unit;
    function Type Convert(X : Miles_per_second)
return Miles per_hour;
     function "*"(LEFT : Miles_per_second; RIGHT : float)
return Miles_per_hour;
 end SPEED GUN_UNITS;
                          ----- Compilation Unit 2 -----
with SPEED_GUN_UNITS; use SPEED_GUN_UNITS;
package HARDWARE CIRCUITS is
function Xmit_Frequency_Measurement return Hertz;
function Doppler_Frequency_Measurement return Hertz;
procedure put(X : Miles_per_hour);
end HARDWARE_CIRCUITS;
                                                --- Compilation Unit 3 -----
 with HARDWARE CIRCUITS; use HARDWARE CIRCUITS; with SPEED GUN UNITS; use SPEED GUN UNITS; procedure Speed Gun is TRANSMIT FREQUENCY, DOPPLER FREQUENCY: Hertz; SPEED: Miles per hour; C: constant Miles per second: - Type Convert(186_280.0); -- speed of light begin
 := Type_Convert(186_280.0); -- speed of light
begin
TRANSMIT FREQUENCY := Xmit_Frequency Measurement;
DOPPLER FREQUENCY := Doppler Frequency Measurement;
SPEED := (C / 2.0) * (DOPPLER FREQUENCY / TRANSMIT_FREQUENCY);
put(SPEED);
  end Speed Gun;
                               ----- Compilation Unit 4 -----
                                                                                                                     (continued on next page)
```

A Reconfigurable Programmer's Editor With Source Code

ME is a high quality programmer's text editor written specifically for the IBM PC. It contains features only found in the more expensive programmer's text editors. These features include:

- Multiple Windows
- Column cut and paste
- Line marking for source code
 - Regular Expressions
 - C-like Macro Language
 - Reconfigurable Keyboard
- Capture your DOS session
- Run your compiler and examine errors
- Comes with useful precompiled macros

New commands and features may be added to the editor by writing programs in its macro language. The language resembles C, much easier to write macros in than a LISP based language. The macro language comes with a rich set of primitives for handling strings and changing the editor environment, plus most of the flow-of-control constructs that come in C (for, while, if, break, continue).

The source code option lets you see how text editors are written. You will also learn how to write interpreters by examining the code to the macro language compiler and interpreter.

The code is written in standard C, with several key library routines written in assembler for speed. The source code option is perfect for OEMs and VARs who want to add editing or word processing capabilities to their applications.

Price for editor and on-line documentation—\$39.95
Price for editor with complete source—\$94.95
(Please add \$2.00 for shipping and handling)

Special offer—New York Word word processor—\$29.95 Multi-windowing, mail merge, hyphenation, math, regular expressions, TOC and index generators

MAGMA SYSTEMS

138-23 Hoover Ave., Jamaica, NY 11435 (718) 793-5670

CIRCLE 313 ON READER SERVICE CARD

DIMENSIONAL DATA TYPES

Listing Two

```
(Listing continued, text begins on page 50.)
```

```
package body SPEED GUN UNITS is
   function Type_Convert(X : Miles_per_second)
  return Miles_per_hour is
  MPH : Miles_per_second;
   begin
MPH := X * 60 * 60;
    return Type_Convert(Dimensionless(MPH));
end Type_Convert;
   function "*"(LEFT : Miles_per_second; RIGHT : float)
return Miles_per_hour is
       return Type Convert (LEFT * RIGHT);
end SPEED GUN UNITS;
                                       --- Compilation Unit 5 -----
with TEXT IO; use TEXT IO;
package body HARDWARE_CIRCUITS is
-- The statements below are standing in for code which would
-- read the frequency directly from hardware circuits and
-- would display speed on an LCD or LED display. Since I'm
-- using a terminal as a substitute input device I used
-- TEXT_IO to get and put data.
   package INT IO is new INTEGER IO(integer); use INT_IO;
package F_IO is new FLOAT_IO(float); use F_IO;
    function Xmit_Frequency_Measurement return Hertz is
   F : float;
begin
       put("What is the Transmit Frequency (in Hertz)? ");
   get(F);
skip line; -- TEXT_IO quirk
return Type_Convert(F);
end Xmit_Frequency_Measurement;
    function Doppler_Frequency_Measurement return Hertz is
   F:
begin
          : float;
       put("What is the Doppler Frequency (in Hertz)? ");
```

End Listings

FREE SOURCE CODE!

Vitamin C Difference

With Vitamin C, your applications come alive with windows that explode into view! Data entry windows and menus become a snap. Vitamin C's open ended design is full of "hooks" so you can "plug in" special handlers to customize most routines. Of course, Vitamin C includes all source code FREE, with no hidden charges. It always has.

Windows

Create windows with one easy function. Vitamin C automatically takes care of complicated tasks like saving and restoring the area under a window.

Options include titles, borders, colors, pop-up, pull-down, zoom-in, scroll bars, sizes to 32k, and more. Unique built-in feature lets users move and resize windows at run-time!

Data Entry

Flexible dBase-like data entry and display routines feature protected, invisible, required, and scrolling fields, picture clause formatting, full color/attribute control, selection sets, single field and full screen input, and unlimited validation via standard and user definable routines.

VITAMIN C It's good for your system!

High Level Functions

Standard help handler provides context sensitive pop-up help messages any time the program awaits key strokes. So easy to use that a single function initializes and services requests by opening a window, locating, formatting, displaying and paging through the message.

Multi-level MacIntosh & Lotus style menus make user interfaces and front ends a snap. Menus can call other menus, functions, even data entry screens quickly and easily.

Text editor windows can be opened for pop-up note pads and general purpose editing. Features include insert, delete, word wrap, justify, cut, paste, search, and more!

VCScreen

With VCScreen and Vitamin C working together, you'll reach a new level or productivity you can't reach with a function library alone!

VCScreen speeds development even more! The interactive screen editor actually lets you draw input, output and constant fields, headings, boxes, lines, even a window for your froms to run in.

VCScreen generates readable C source code ready to "plug in" to your application and link with Vitamin C.

FREE SOURCE CODE!

Guarantee

Includes ready to use libraries, tutorial, reference manual, demo, sample and example programs, and quick reference card; for IBM PC and compatibles. Specify compiler and version when ordering.

Vitamin C Source......FREE*

*Free with purchase of Vitamin C.

VCScreen\$99.95 Requires Vitamin C and IBM PC/XT/AT or true compatible.

Shipping \$3 ground, \$6 2-day air, \$20 overnight, \$30 overseas. Visa and Master Card accepted. All funds must be U.S. dollars drawn on U.S. bank. Texas residents add 7¼% sales tax.

(214) 245-6090



Box 112097 Carrollton, Texas 75011

Turbo Pascal Tools

TURBO Advantage:

Source Code Libraries for Turbo Pascal

This library of more than 220 routines, complete with source code, sample programs and documentation will save you hours developing and optimizing your programs!

Routines are organized and documented under the following categories: bit manipulation, file management, MS-DOS support, sorting, string operations, arithmetic calculations, data compression, differential equations, Fourier analysis and synthesis, matrices and vectors, statistics, and much more! All source code is included.

A detailed manual includes a description of the routine, an explanation of the methods used, the calling sequence, and a simple example. For MS/PC-DOS systems.

Turbo Advantage

Item #070 \$49.95

STAT Toolbox for Turbo Pascal

Two statistical packages in one!

A library disk and reference manual

Use these powerful statistical routines to build your applications. Routines include: • statistical distribution functions • random-number generation • basic descriptive statistics • parametric and non-parametric statistical testing • bivariate linear regression, multiple and polynomial regression.

A demonstration disk and manual

This package incorporates the library of routines into a fully functioning statistical program. Two data management programs are included to facilitate the storage and maintenance of data.

Full source code is included. (For IBM PC's and compatibles. Turbo Pascal version 2.0 or later, and PC-DOS 2.0 or later are required.)

STAT Toolbox

Item #050 \$69.95

TURBO Advantage Display:

Form Generator for Turbo Pascal

TURBO Display includes a menu driven formprocessor, 30 Turbo Pascal procedures and functions to facilitate linking created forms to your program, and full source code and documentation. For MS-DOS systems.

Some of the TURBO Advantage: Source Code Libraries for Turbo Pascal routines are necessary to compile TURBO Display.

TURBO Display

Item #072 \$69.95

The Turbo Pascal Toolbook Edited by

Namir Clement Shammas

You'll find:

- an extensive library of low-level routines
- external sorting and searching tools, presenting a new database routine that combines the best features of the B-tree, B+ and B++ trees
- window management, to help you create, sort and overlay windows
- · artificial intelligence techniques
- mathematical expression parsers, offering two routines that convert mathematical expressions into RPN tokens
- a smart statistical regression model that searches for the best regression model to represent a given set of data.

All routine libraries and sample programs are on disk for MS-DOS systems, and over 800K of Turbo Pascal source code is included!

Turbo Pascal
Toolbook Item #080 \$25.95
Turbo Pascal Toolbook
with disk Item #081 \$45.95

TURBO Advantage Complex:

Complex Number Routines for Turbo Pascal

TURBO Complex provides procedures for performing all the arithmetic operations and necessary real functions with complex numbers. Each procedure is based on predefined constants and types. By using these declarations the size of arrays are easily adapted. Each type declaration is a record with both a real and imaginary part. Use these procedures to build more sophisticated functions in your own programs.

TURBO Complex also demonstrates the usage of these procedures in routines for vector and matrix calculation with complex numbers and variables; simultaneous Fourier transforms; calculations of convolution and correlation functions; low-pass, high-pass, band- pass and band-rejection digital filters; and solving linear boundary-value problems.

Source code and documentation is included. For MS-DOS systems. Some of the *TURBO Complex* routines are most effectively used with routines contained in *TURBO Advantage*.

TURBO Complex

Item #071 \$89.95

to: M&T Books, 501 Glavest	
94063. Or, Call TOLL-FRE	
8a.m5p.m. In CA call 80	00-356-2002
YES! Please send me	
	# 070 \$49.95
☐ TURBO Advantage Dis	
	# 072 \$69.95
☐ TURBO Advantage Cor	
	# 071 \$89.95
STAT Toolbox	# 050 \$69.95
☐ Turbo Pascal Toolbox	
with disk	# 081 \$45.95
	total
	ax%
Add \$2.25 per item for sh	
	TOTAL
Name	
Address	
City	
State	_Zip
Check enclosed. Publishing.	Make payable to M&T □VISA □ M/C □ AMEX
Card no.	
Expiration Date	
Cionatura	

ATTENTION

C-PROGRAMMERS

File System Utility Libraries

All products are written entirely in K&R C. Source code included, No Royalties, Powerful & Portable.

BTree Library

ISAM Driver

75.00

- High speed random and sequential access
- Multiple keys per data file with up to 16 million records per file.

Duplicate keys, variable length data records.

40.00

- Greatly speeds application development.
- Combines ease of use of database manager with flexibility of programming language.
- Supports multi key files and dynamic index definition.
- Very easy to use

Make

59.00

- Patterned after the UNIX utility.
- Works for programs written in every language.
- Full macros, File name expansion and built in rules.

Full Documentation and Example Programs Included.

ALL THREE PRODUCTS FOR -

149.00

For more information call or write:

SOFFICUS
Credit cards accepted.

1343 Stanbury Drive Oakville, Ontario, Canada L6L 2J5 (416) 825-0903

Dealer inquiries invited.

CIRCLE 259 ON READER SERVICE CARD

WINDOWS - MENUS - DATA ENTRY - SCREENS

HI-SCREEN XL™

Application Developers! **HI-SCREEN** XL^{TM} , the newest version of HIGH SCREEN, is a complete and unmatched programming tool for managing your user-interface. **HI-SCREEN** XL^{TM} features a revamped and enhanced screen editor, increased speed and performance, along with a new thorough reference and user's manual.

Whatever tool you own: compare, you'll be convinced!

1. WINDOWS

HI-SCREEN XLTM makes you a master in window management:

- Pop-up windows any size, anywhere.
- Use windows for data entry, menus, on-line help.
- Create context-sensitive help, conditioned by user keystroke sequence, with scrollable text.
- Unlimited number of windows, overlapping up to 26 levels deep. Save/restore area under each window.
- WINDOWS: for on-line help, menus, data entry. Up to 26 levels deep.
- MENUS: pop-up, pull-down or Lotus style, also for batch files.
- DATA ENTRY: automatic field checking: format, type, range... field by field or full screen. Error handling.
- SCREENS: full-featured screen editor. Language independent. Fast display from RAM.

Royalty free, not copy protected, 30 day money back guarantee, trade up available.

Softway, Inc.

PC/SOFT Product Line 500 Sutter St., Suite 222 San Francisco, CA 94102 (415) 397-4666 HI-SCREEN XLTM is \$149 (CA res. add tax), S&H USA \$5 Visa, M/C welcome

PASCAL, C, dBASE, BASIC, COBOL, FORTRAN, ASSEMBLER, etc.

CIRCLE 372 ON READER SERVICE CARD

C CHEST

Listing Twenty-six

(Text in April)

```
Copyright (c) 1986, Allen I. Holub. All rights reserved.
  * Routines for processing individual commands, the following commands cause a break unless is used as the command character: .bp .br .ce .fi .in .nf .sp .ti
#include <stdio.h>
#include <ctype.h>
#include "nr.h"
extern int
extern char
extern char
extern double
                            mgetc(), fgetc();
*skipspace(), *skipto(), *cpy();
*strsave ( char* );
parse ( char**);
static
                            Nestlev = 0;
                                                     /* .{/.} Nesting level */
 setnum( target, num, offset )
int    *target, num, offset;
              /* If offset is true, set target to its
                previous value + num, otherwise set
it to num. Numbers are not allowed
to go negatative.
              if(!offset)
                             *target = (num < 0) ? 0 : num :
              P1 SP
                            if( ( *target += num ) < 0 )
                                           *target = 0;
  Routines to process individual commands: (note that the comment command .\" is processed by expand() in nr.c.

The \" is the actual comment delimiter and a dot on a
line by itself is treated as a comment.
sblock()
                                          --- NOT AN NROFF COMMAND ---
                   . {
                    Starts a block for an .if, .ie, or .el. Bumps the process level up a notch. This routine can not be inhibited by "Inhibit." A \(\ or \\ is mapped to a .) for nroff compatability. (}))
              process( Ifile, Ifilename, Ismacro, Macv ); return 0;
              ++Nestlev;
eblock()
                      . }
                                          --- NOT AN NROFF COMMAND ---
               * Terminate a . { block
                    Forces process() to terminate, bumping the nesting level back down a notch. This routine can't be inhibited by Inhibit. A \} is treated
                    like a comment in terms of escape processi
but it escape() will call eblock() in this
                    case too. (()
                    This command is not inhibitable
              if( --Nestlev >= 0 )
                    return 1:
              else
                     err("Mis-matched .) (No corresponding .( )\n");
                     return 0:
ad(lstr)
unsigned char *1str ;
              /* .ad [b n l r c]
                   Turn on adjusting. If *1str is null then BOTH is used, otherwise the indicated adjustment mode is
                    set.
             Adjusting = 1;
```

```
switch( *lstr )
          case '\O'.
          case ALT_BOTH: Adjmode = BOTH ;
          case RIGHT:
                                Adjmode = *lstr;
          case CENTER:
                                break;
          default:
                 err ("Bad mode: use (1)eft (r)ight (c)enter
                                             (b) oth=(n) ormal. \n");
cm(str)
*str;
                                 -- NOT AN NROFF COMMAND
           /* .cm [on]
                      enable nroff-style copy mode inside macro
definitions. If no argument, nroff copy
mode is disabled. In normal copy mode only
\" and \<CR> are recognized. In nroff mode
                      the following are recognized:

\" \<cr> \n \* \$ \\ \. \t \a
           Nr cpmode = *str ;
af(lstr, rstr)
char *lstr, *rstr;
     /* .af R [1 001 i I a A e E]
          Alter format of number register R to the indicated mode. Default is arabic.
     register int
      if( *lstr )
           switch( c = *rstr )
            case PADDED:
                  while( isdigit(*rstr) && c < '9' )
                       rstr++:
                 }
                 if( isdigit( *rstr ) )
    err("Only 9 digits of zero fill allowed\n");
            case '\0'.
                                  c = ARABIC; break;
            case LC ROMAN:
case LC ROMAN:
case LC ALPHA:
case LC ALPHA:
case LC ENG:
case UC ENG:
            case ARABIC:
                  err( "Illegal number register format <%c>\n", c );
            putnreg(lstr, c , 0, -1, 0, 0);
 am(lstr, rstr)
char *lstr, *rstr;
             /* .am xx yy
                        Append text to the macro named xx until either .. or .yy (in rstr) is found at the start of the line.
            if( *lstr )
                        mappend( lstr, rstr );
             else
                        err("Missing macro name to .am\n");
  as(lstr, rstr)
char *lstr, *rstr;
             /* .as lstr rstr
                        append rstr to end ofstring named in 1str
                                                (continued on next page)
```

80386

SOFTWARE DEVELOPMENT TOOLS

The Phar Lap 80386 Software Development Series:

386 ASM/LINK by Phar Lap (MS-DOS®) \$495 Full-featured macro assembler and linker. Includes a debugger and 32-bit protected mode runtime environment.

80386 High-C™ by MetaWare (MS-DOS®) \$895

80386 Professional Pascal™ (MS-DOS®) \$895 by MetaWare

UNIX™ and VAX/VMS® cross tools (call)

The wait for professional software development tools for the 80386 is over! Whether you are upgrading an existing IBM PC application to the '386, moving a mainframe application down to a PC, or writing the next PC best-seller, the Phar Lap 80386 Software Development Series is for you. It is an integrated line of products which provides everything you'll need to create and *run* 80386 protected mode applications under MS-DOS.

(617) 661-1510

Phar Lap Software, Inc. "The 80386 Software Experts"

60 Aberdeen Ave.

Cambridge, MA 02138

CIRCLE 343 ON READER SERVICE CARD

SCIENTIFIC/ENGINEERING GRAPHICS TOOLS


for the IBM PC

FORTRAN/Pascal tools: **GRAFMATIC** (screen graphics) and **PLOTMATIC** (pen plotter driver)

These packages provide 2D and 3D plotting capabilities for programmers writing in a variety of FORTRAN/Pascal environments. We support MS, R-M and IBM FORTRAN and more. PLOTMATIC supports HP or Houston Instrument plotters.

Don't want to program? Just ask for **OMNIPLOT!** Menudriven, fully documented integrated scientific graphics. Write or call for complete information and ordering instructions.

GRAFMATIC - PLOTMATIC - OMNIPLOT [S] & [P]



Microcompatibles, 301 Prelude Drive, Silver Spring, MD 20901 (301) 593-0683

New Release

SEIDL MAKE UTILITY

Version 2.0

The BEST just got BETTER!

If you're serious about software development, consider the SEIDL MAKE UTILITY (SMK). SMK is not just another copy of the Unix Make. It was specifically designed to deliver features and performance not found in other makes.

- ✓ Structured Language to describe dependencies in a clear, concise and portable manner.
- √ Rich Command Set includes parameterized macros, variables, if-then-else, iteration, wild cards, exception cases, macro libraries, interactive statements, environment access, pattern matching and much more!
- ✓ Intelligent Analysis algorithm handles nested include files, library dependencies, and performs consistency tests to detect errors that other makes would blindly ignore.
- ✓ Seidl Version Manager compatibility lets you expand your system into the most comprehensive revision/version control system available.

"SMK is a very good Make indeed. Its major distinction is a truly simple Dependency Definition Language, easy to learn and easy to use... you'll probably bless SMK."

- Sextant, July '86

"SMK offers many unique features. [The error handling facility] is extremely useful if a large number of files must be recompiled."

- Computer Language, June '86

Version Only \$99⁹⁵ \$3.50 p&h Call for other op systems.

Call Today

1-313-662-8086

Visa/MC/COD Accepted Dealer Inquiries Invited

SEIDL COMPUTER ENGINEERING

3106 Hilltop Dr., Ann Arbor, MI 48103

CIRCLE 114 ON READER SERVICE CARD

C CHEST

Listing Twenty-six (Listing continued)

```
if( *lstr )
                     sappend( lstr, rstr );
          else
                     err("Missing string name\n");
bd( lstr, rstr )
char *lstr, *rstr;
           /* .bd on off --- MODIFIED NROFF COMMAND ---

    Initialize bold face mode.

            * Send lstr to the printer to put it into bold mode,

* send rstr to turn off boldface. Maximum length of


* either string is 80 characters. Use \x to send

* control characters.
          static char
                               on[81], off[81];
          on[80] = off[80] = 0;
           strncpy( on, lstr, 80 );
strncpy( off, rstr, 80 );
           Bd_on = on;
Bd_off = off;
bo( num, str, offset )
char *str;
           num, offset;
           /* .bo [ [+-]N ] --- NOT AN NROFF COMMAND ---
                     Put the next N input lines into boldface.
           setnum ( & Num bold, num, offset );
bp( num, str, offset, dobreak )
char *str;
               .bp [ [+-] N ]
                     begin new page, having number N. If N is
absent, use the current page number + 1;
Note that N is applied to the new page,
not the current one, so a footer on the
current page will reflect the old number.
           if( num )
Nospace = 0; /* Re-enable spacing */
           if( dobreak )
     brk();
           prblank( (PGLEN-OLINE) + 1 ); /* Finish page */
                 PAGE = offset ? PAGE + num : num ;
br( str, dobreak )
           /* .br - stop filling and print current buffer.
          if (dobreak)
c2(lstr)
*lstr;
          Nobreak = *lstr ? *lstr : ' ;
cc(lstr)
char *lstr;
          /* .cc [c] -- make c the command character. If missing, use dot (.).
```

```
Cmd chr = *lstr ? *lstr : '.' ;
ce( num, str, offset, dobreak )
char *str;
          num, offset ;
           /* .ce [N]
                                   - Center the next N input lines
                                 without filling. Default N is 1.
           if ( dobreak )
                     brk();
           Num_center = offset ? (Num_center + num) : num ;
cf(str)
*str;
           /* .cf file -- copy file directly to standard output. Useful for downloading fonts.
            */
           FILE
                                *fd;
           register int c;
           if( !*str )
   err( "Missing filename in .cf\n" );
           else
                if( !(fd = fopen(str,"rb")) )
  err(".cf %s, Can't open file\n", str);
                      while( (c = getc(fd)) != EOF )
   putc( c, stdout );
                      fclose(fd);
ch( num, str, offset )
char *str;
           num, offset;
 int
           /* .ch xx [+-]N -- Change trap postion for macro xx

position is destroyed (NROFF will shadow the
earlier trap, not destroy it). If N is absent,
the trap is removed.
           if( *str )
                      movetrap( str, num, offset );
                      err ("Missing macro name in .ch command\n");
 cu( num, str, offset )
char *str;
int num, offset;
            setnum( &Cont_ul , num, offset );
 da( lstr )
char *lstr;
            /* .da [xx] -- Append to diversion xx. Stop
appending when a .da or .di without
an argument is encountered.
             */
                      dappend( lstr );
            else
                      endiv();
 db( lstr ) *lstr;
                                 -- NOT AN NROFF COMMAND --
Enable debugging mode (same as
-v -c on the command line) if an
            /* .db [1]
                                                                       (continued on next page)
```

Byte Magazine called it.

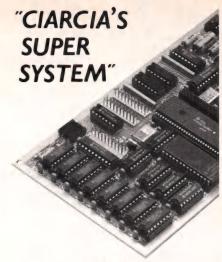

The SB180 Single Board Computer

Featured on the cover of Byte, Sept. 1985, the SB180 lets CP/M users upgrade to a fast, 4" x 71/2" single board system.

 6MHz 64180 CPU (Z80 instruction superset), 256K RAM,

8K Monitor ROM with device test, disk format, read/write.

 Mini/Micro Floppy Controller (1-4 drives, Single/Double Density, 1-2 sided, 40/77/80 track 31/2," 51/4" and 8" drives).

Measures 4" x 71/2," with mounting holes

One Centronics Printer Port

Two RS232C Serial Ports
 (75-19,200 baud with console port auto-baud rate select).

ZCPR3 (CP/M 2.2/3 compatible)

Multiple disk formats supported

Menu-based system customization

New Low Prices

SB180-1

SB180 computer board w/256K bytes RAM and ROM monitor\$299.00

SB180-1-20

same as above w/ZCPR3, ZRDOS and BIOS source \$399.00

COMM180-S

SCSI interface \$150.00

Now Available

TURBO MODULA-2......\$69.00
TURBO MODULA-2 with
Graphix Toolbox\$89.00

TO ORDER CALL TOLL FREE 1-800-635-3355

TELEX 643331

For Technical Information or in CT, call: 1-203-871-6170



Micromint, Inc. 4 Park Street Vernon, CT 06066

IQCLISP

More Common Lisp features in less space for less money than any other IBM-PC lisp.

- MSDOS portable
- Bignums, 8087 support
- Multidimensional arrays
- Full Common Lisp package system
- Full set of control primitives.
- Keyword parameters, macros
- Save/restore full environments for speed
- STEP, TRACE, BREAK, DEBUG, ADVISE, APROPOS
- Roll-out frees space for invoking MSDOS commands

IQCLISP PACKAGE \$300.

LISP

∫q Integral Quality
P.O. Box 31970

Seattle, Washington 98103 (206) 527-2918

IQLISP

Now with a compiler.

- Compiler comes with source
- Compiler cuts execution time 50-75%, program size 60-80%
- Multidimensional arrays
- Floating point, bignums, 8087 support
- Macros
- Color graphics
- Multiple display windows
- Assembly language interface
- Available for IBM PC or TI-PRO

IQLISP PACKAGE \$270. INCLUDES COMPILER

- VISA and Mastercard accepted
- Generous update policy
- Attractive educational license

CIRCLE 327 ON READER SERVICE CARD

C CHEST

```
argument is present, else disable debugging mode.
                Verbose = No cntl = *lstr != '\0';
de(lstr, rstr)
char *lstr, *rstr;
                           .de xx yy -- ENHANCED NROFF COMMAND --
                                Define a macro called xx. Definition stops when a .<rstr> is found at the beginning of If rstr is missing .. is used. If both arguments are missing, all currently defined macros are printed (like .pm in real nroff except contents of macro are printed too). If the macro already exists, it is deleted. Two copy modes are supported (see .cm).
                92 [9
                                printm();
df( lstr, rstr )
char *lstr, *rstr;
        /* .df F <start> <end> <cwidths>
                                                 -- NOT AN NROFF COMMAND --
          * Define a font. F is a font name (one character),
* <start> is a macro to invoke when font is invoked.
* <end> is a macro to invoke when you switch out of
the font. <cwidth>> is the name of a file that holds
the character-width tables (up to 255 char-sized
numbers delimited by whitespace or blank lines).
If no font name is specified then existing fonts
are printed to standard output.
             Lastfont (below) points at the most recently added font. This routine assumes that main() will call it to initialize the roman font before any other fonts are defined. The behaviour is a little strange though. findfont() always returns 0 when the 'R' font is requested. Consequently findfont() won't return -1, for a nonexistant font, when 'R' is defined. Be careful.
        register FONT
register char
static FONT
                                                  *fp;
                                                 "p;
*p;
*lastfont = &Fonts[0];
i, existing;
*stream;
        UCHAR
        if(!*lstr)
                 for ( fp = Fonts-1; ++fp <= lastfont; )
                        printf("Font %c: start with <%s>, end with <%s>,
                                                           fp->name, fp->smac, fp->emac);
                      p = fp->widths;
for(i = 0; i < MAX CHARS IN FONT; i++)
                              if( i % 8 == 0 )
printf("\n");
                                      printf("^%c:%-3d ", i+'@', p[i]);
                              else
                                      printf("%2c:%-3d ", i , p[i]);
                      printf(*\n----
     else
              existing = findfont(*lstr);
             if( existing < 0 )
   fp = ++lastfont;</pre>
                                                                     /* Font doesn't exist
                     else
                                                                      /* Redefining existing font */
                             fp = &Fonts[ existing ];
if( fp->left )
    free( fp->left );
                     fp->name = *lstr ;
fp->resolution = Hs_amt;
                                                                            (continued on page 72)
```

WHY LOGITECH MODULA-2 IS MORE POWERFUL THAN PASCAL OR C.

"A clear winner... The integrated editor is a joy to use." Jan. '87

APPRENTICE

- Separate Compilation w/inter-module typechecking
- **Native Code Generation**
- Large Memory Model Support
- Most Powerful Runtime Debugger
- **Comprehensive Module Library**
- Maintainability
- Translator from Turbo and **ANSI Pascal**

WIN A FREE TRIP TO vitzerland



HOMELAND OF MODULA-2

Return your Modula-2 Registration Card or a reasonable facsimile, postmarked between March 1, 1987 and May 31, 1987 to be included in a once-only drawing!

Grand Prize: One week excursion for 2 in Zurich, Switzerland including a guided tour of ETH, the University where Modula-2 was created by Niklaus Wirth. European customers may substitute a trip to Silicon Valley, California.

Second and Third Prizes: LOGITECH CT Mouse or LOGITECH Bus Mouse with Paint & Draw software - a \$219 value, absolutely free!

*Write to Logitech, Inc. for a registration card facsimile



NEW! APPRENTICE PACKAGE

Everything you need to begin producing reliable maintainable Modula-2 code. Includes the Compiler with 8087 support, integrated Editor, Linker, and BCD Module. We're also including FREE our Turbo Pascal to Modula-2 Translator!

NEW!

WIZARDS' PACKAGE

\$199 This package contains our Plus Compiler-for professional programmers or for those who just want

the best. The Plus Compiler with Integrated Editor requires 512K and takes advantage of the larger memory to increase compilation speed by 50%. Our Turbo Pascal to Modula-2 Translator is also included at no extra charge.

NEW!

MAGIC TOOLKIT

We've put our most powerful development tools into one amazing Toolkit for use with either the Apprentice or Wizards' packages. Highlighted by our Runtime Debugger, the finest debugging tool available anywhere, the Toolkit also includes our Post Mortem Debugger, Disassembler, Cross Reference utility and Version which keeps track of different versions of one program. Our MAKE Utility figures out module dependencies and automatically selects those affected by code changes to minimize recompilation and relinking. We also provide source code of our major library modules for you to customizeor just play with.

WINDOW PACKAGE

\$49

\$299

Now you can build true windowing into your Modula-2 code. Features virtual screens, color support, overlapping windows and a variety of borders.

ROM PACKAGE AND CROSS RUN TIME DEBUGGER

For those who want to produce rommable code. You can even debug code running in ROM from your PC.

Turbo Pascal is a registered trademark of Borland International.

CIRCLE 257 ON READER SERVICE CARD

Call for information about our VAX/VMS version, Site License, University Discounts, Dealer & Distributor pricing.

> To place an order call toll-free:

800-231-7717

In California:

800-552-8885

YES!	I want the spellbinding power of LOGITECH Modula-2!

☐ Apprentice Package

☐ Wizards' Package \$199

\$99 ☐ Magic Toolkit

☐ Window Package \$49

☐ ROM Pkg/Cross RTD \$299

Add \$6.50 for shipping and handling. Calif. residents add applicable sales tax. Prices valid in U.S. only.

Total Enclosed \$_

□ VISA □ MasterCard □ Check Enclosed

Card Number **Expiration Date**

Signature

Name

Address

City

State

Phone


\$00



LOGITECH, Inc. 805 Veterans Blvd. Redwood City, CA 94063 Tel: 415-365-9852

In Europe: LOGITECH SA, Switzerland

Tel: 41-21-879656 • Telex 458 217 Tech Ch In Italy: Tel: 39-2-215-5622

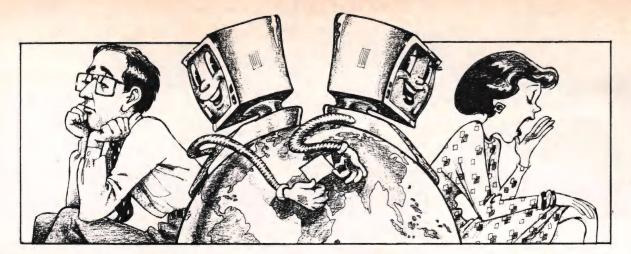

Ten Reasons Not to Use PeaceNet

I don't like working with others

PeaceNet is a computer network and communication system for people who believe that global planning and cooperation are necessary to reverse a trillion-dollar-per-year arms race; it is linking users throughout the United States and in over 70 other countries.

2. I've got all the information I'll ever need

PeaceNet is for those who appreciate that information is always growing and changing; its bulletin boards, conferences, and databases provide information about everything from Central America to Star Wars.

I love playing phone tag

PeaceNet's electronic mail system renders those endless conversations with secretaries and answering machines obsolete.

I don't know how to use my computer

PeaceNet helps novices with simple, entertaining manuals and round-the-clock staff for answering their questions.

5 l enjoy copying, labeling, and stamping letters

PeaceNet enables you to send messages to hundreds of other users with one simple command.

6 to waste on postage and phone bills

PeaceNet is for people who want to save money; it lets you send documents across the world faster than Federal Express for pennies per page.

7. I don't mind getting action alerts a week late

PeaceNet does mind and can help your organization send out time-urgent alerts instantly.

8 I don't have the right kind of computer equipment

PeaceNet is available to anyone with a computer terminal and a modem.

An effective peace movement isn't worth 50 cents a day

PeaceNet users disagree.

10 It's all hopeless, anyway
Then why read this magazine when Modern
Wrestling would suffice?

Nearly a thousand people and fifty groups are already using PeaceNet, including Beyond War, the National Freeze Campaign, and Nuclear Times. If you want to join them in an unprecedented international dialogue for peace, write or call us today for details.

PeaceNet: The First Global Computer Network for Peace 1918 Bonita, Berkeley, CA 94704 (415) 486-0264

"How to protect your software by letting people copy it."

By Dick Erett, President of Software Security



Inventor and entrepreneur, Dick Erett, explains his company's view on the

protection of intellectual property.

crucial point that even sophisticated software development companies and the trade press seem to be missing or ignoring is this:

Software protection must be understood to be a distinctively different concept from that commonly referred to as copy protection.

Fundamentally, software protection involves devising a method that prevents unauthorized use of a program, without restricting a legitimate user from making any number of additional copies or preventing program operation via hard disk or LANs.

Logic dictates that magnetic media can no more protect itself from misuse than a padlock can lock itself.

Software protection must reside outside the actual storage media. The technique can then be made as tamper proof as deemed necessary. If one is clever enough, patent law can be brought to bear on the method.

Software protection is at a crossroads and the choices are clear. You can give product away to a segment Hard Disk Installation: Simply copy program disk to hard disk using DOS Command - Copy A:*.* C:

Program Back-ups: You may make as many copies of the program diskette as you wish.

Data Back-ups: Use normal back-up and restore commands, including backing up sub-directories containing program files.

The Networks: This product may be Networks. Follow the same installation of on page 102 of this manual. The Block of the normal operation of any

Soon all software installation procedures will be as straightforward as this. The only difference will be whether you include the option to steal your product or not.

of the market, or take a stand against the theft of your intellectual property.

"... giving your software away is fine..."

We strongly believe that giving your software away is fine, if you make the decision to do so. However, if the public's sense of ethics is determining company policy, then you are no longer in control.

We have patented a device that protects your software while allowing unlimited archival copies and uninhibited use of hard disks and LANs. The name of this product is The BLOCKTM.

The BLOCK is the only patented method we know of to protect your investment. It answers all the complaints of reasonable people concerning software protection.

In reality, the only people who could object are those who would like the option of stealing your company's product.

"... eliminating the rationale for copy-busting..."

Since The BLOCK allows a user to make unlimited archival copies the rationale for copy-busting programs is eliminated.

The BLOCK is fully protected by federal patent law rather than the less effective copyright statutes. The law clearly prohibits the production of work-alike devices to replace The BLOCK.

The BLOCK attaches to any communications port of virtually any microcomputer. It comes with a unique customer product number programmed into the circuit.

The BLOCK is transparent to any device attached to the port. Once it is in place users are essentially unaware of its presence. The BLOCK may be daisy-chained to provide security for more than one software package.

Each software developer devises their own procedure for accessing The BLOCK to confirm a legitimate user. If it is not present, then the program can take appropriate action.

"... possibilities... limited only by your imagination..."

The elegance of The BLOCK lies in its simplicity. Once you understand the principle of The BLOCK, hundreds of possibilities will manifest themselves, limited only by your imagination.

Your efforts, investments and intellectual property belong to you, and you have an obligation to protect them. Let us help you safeguard what's rightfully yours. Call today for our brochure, or a demo unit."

06905



870 High Ridge Road Stamford, Connecticut 203 329 8870

Programmers & Developers New Products!

Distribute Your Demos with No Royalties

Screen Machine creates interactive demos, tutorials, menu systems and DOS shells. Includes a text screen editor that optionally generates source code* and binary or text files. Never write code for screen display again. Capture any program's text screens for editing and your own use. Capture CGA compatible graphics screens for BLOAD or direct display. SAVE hundreds of HOURS of work.

Now there's no need for separate screen and demo software packages and no need to pay outrageous royalties. Priced at only \$79.00.

*Turbo Pascal, Mach 2 for Turbo, Assembler, dBASE II & III, BASIC (including The Inside Track and Mach 2).

Supercharge Turbo Pascal

Mach 2 for Turbo Pascal adds assembler speed to your programs. 90 + subroutines, most in assembler, give you speed and functionality you never knew was possible. No knowledge of assembler language required.

INSTANT displays. INSTANT windows (incl. exploding and boxed). FASTEST sort you've seen. Read/write files FAST as DOS. INSTANT menus, 1-2-3 horizontal and vertical bar.

Trap^C/^Break & DOS critical errors so no more A)bort, R)etry or I)gnore. Emulate BASIC PRINT USING for FAST formatted numbers. Execute any prog, batch or DOS command without ending program.

Read environment. Read file directory. Get/set file attributes. Plus too many string functions to describe here. No royalties when you distribute COM programs. All source code included. A true bargain at \$69.00.

NOT COPY PROTECTED. 30 Day Money-Back Performance Guarantee. Requires IBM/compatible & DOS 2 + .

Order Now 800-922-3383

We welcome VISA/MC. COD US only \$3. S/H US \$3, Canada \$5, Elsewhere \$18. GA res. add tax and call 404-973-9272. Demo available. Send \$5 check. Refunded on direct purchase.

We also publish Stay-Res, Mach 2 for BASIC, The Inside Track and Peeks 'n Pokes.

MicroHelp, Inc. 2220 Carlyle Drive Marietta GA 30062

CIRCLE 215 ON READER SERVICE CARD

C CHEST

```
p = skipto(' ', rstr , Esc );
             if( *p ) *p++ = '\0';
             fp->smac[0] = rstr[0] ;
fp->smac[1] = rstr[1] ;
fp->smac[2] = '\0';
             p = skipspace ( p, Esc );
             p = skipspace( p, Esc ); /* and then go to following word */
             if(!fp->left)
                  err(".df: Not enough memory for width tables\n");
             fp->right = cpy( fp->left, Left_str ) + 1;
fp->widths = cpy( fp->right, Right_str ) + 1;
             memset ( fp->widths, 1, MAX_CHARS_IN_FONT );
              if( *p )
                  if( !(stream = fopen(p,"rb")) )
    err(".df...%s, Can't open file\n", p);
                  else
                       p = fp->widths;
i = MAX_CHARS_IN_FONT;
                       while (fscanf(stream, "%d", p) == 1 && --i >= 0 )
                       fclose( stream );
di(lstr)
         *lstr;
         else
                  endiv():
ds(lstr, rstr)
char *lstr, *rstr;
         /* .ds xx str -- define string xx to hold the indicated string. If the string * exists, it is deleted. See also: .as
         if( *lstr )
                  screate( lstr, rstr);
          else
                   err("Missing string name\n");
dt( num, str, offset)
char *str;
         num, offset;
int
          /* .dt [+-]N xx Set a diversion trap that will be sprung after N lines have been processed in the current diversion. Only one diversion trap may be active.
          if (!Isdiv)
                   err("No diversion currently active\n");
                   return;
          if( !num || !*str |
                                         /* Clear existing trap */
                   Divtrap = -1;
Dtrap_name[0] = 0;
          else if ( num >= VERT ) /* Set a diversion trap
                   Dtrap_name[0] = str[0];
Dtrap_name[1] = str[1];
                                                                       (continued on page 74)
```

JLY \$74.95

Read what they're saying about this popular program for prototyping and demo-making:

"A winner right out of the starting gate. After you use DEMO once, you'll wonder how you got along without it."

-PC Magazine

"Everybody who writes software, either commercially or for in-house applications, should immediately order a copy. Period. No exceptions."

-Soft · letter

Product of the Month

-PC Tech Journal

Thousands of developers and most of the largest and best known software companies are using this program. You can, too. Act now!

ORIAL! r \$49.95

The perfect companion to the Demo Program. The Tutorial helps you learn the ins and outs of its basic and advanced features. Complete with a 96 page manual containing step-by-step instructions, diskette, and function


ORDER NOW 1-800-CALL

Use 800-number for orders only. Questions, special shipping, etc., call 617-332-2240. No Purchase Orders. Massachusetts residents add 5% sales tax. Outside of the U.S.A., add \$15.00. Requires 256K IBM PC/Compatible, DOS 2.0 or later Supports Monochrome, Color Graphics, and EGA Adapters (text mode only). The Tutorial requires the Demo Program.



SOFTWARE GARDEN, INC.

P.O. Box 373, Newton Highlands, MA 02161

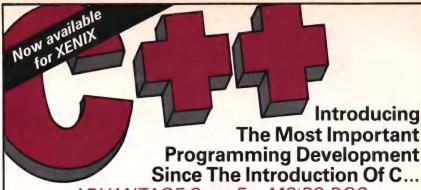

ADVANTAGE C++ For MS/PC-DOS, Exclusively From LIFEBOAT.

They say you can't be all things to all people. But Lifeboat's ADVANTAGE C++ proves that you can be! This exciting new product, developed by AT&T, represents a major programming breakthrough.

ADVANTAGE C++

- Opens the door to object-oriented programming.
- Allows programs with greater resilience, fewer bugs.
- Lets you write reliable, reusable code that is easier to understand.

technical specification sheet call:

1-800-847-7078

In NY: 914-332-1875. 55 South Broadway Tarrytown N.Y. 10591

To order or obtain a complete

Includes many enhancements to C,

Is the key to developing large and

• Has all the benefits of C, without

ADVANTAGE C++ is now available

for the most popular C compilers,

Why be limited to just C ... when you

sophisticated programs more pro-

existing C programs.

Lattice C and Microsoft C.

can have all these pluses!

ductively.

its limitations.

yet maintains full compatibility with

The Full-Service Source for Programming Software

CIRCLE 118 ON READER SERVICE CARD

FULL AT&T C++ for half the price of our competitors!

Guidelines announces its port of version 1.1 of AT&T's C++ translator. As an object-oriented language, C++ includes: classes, inheritance, member functions, constructors and destructors, data hiding, and data abstraction. 'Object-oriented' means that C++ code is more readable, more reliable and more reusable. And that means faster development, easier maintenance, and the ability to handle more complex projects. C++ is Bell Labs' answer to Ada and Modula 2. C++ will more than pay for itself in saved development time on your next project.

from GUIDELINES for the IBM PC: \$195

Requires IBM PC/XT/AT or compatible with 640K and a hard disk. Note: C++ is a translator, and requires the use of Microsoft C 3.0 or later.

Here is what you get for \$195:

- The full AT&T v1.1 C++ translator.
- · Libraries for stream I/O and complex math.
- "The C++ Programming Language", the definitive 327-page tutorial and description by Bjarne Stroustrup, designer of C++.
- Sample programs written in C++.
- Installation guide and documentation.
- 30 day money back guarantee.

To order:

send check or money order to:

GUIDELINES SOFTWARE P.O. Box 749 Orinda, CA 94563

To order with Visa or MC, phone (415) 254-9393. (CA residents add 6% tax.)

C++ is ported to the PC by Guidelines under license from AT&T. Call or write for a free C++ information package.

CIRCLE 351 ON READER SERVICE CARD

VERSION CONTROL SYSTEM

TLIB™ keeps ALL versions of your program in ONE compact library file, even with hundreds of revisions!


- Fastest, most powerful version control system you can buy. Nothing else comes close! TLIB updates libraries faster than some text editors can load and save files.
- LAN-compatible! Shared libraries with PC Net, Novell, etc. Check-in/out locking for multi-programmer projects.
- Synchronized control of multiple related source files.
- · Easy to use. Menu or DOS command line parmeters.
- Frugal with disk space. Libraries are more compact than with most other version control systems. And TLIB uses no temporary files, so you can maintain a 300K library on one 360K diskette, with room to spare, even with TLIB itself on the same disk.
- Free copy of Landon Dyer's excellent public domain MAKE utility (.EXE, plus source code for DOS & VAX/VMS).
- Plus: File compare utility. Virtually unlimited source file size. Date, comments with each version. Configurable user interface, and many configurable options, like: read-only libraries; automatic tab/blank conversion; insertion of revision history comment block in the source file.

PC/MS-DOS 2.x & 3.x Just \$99.95 + \$3 s/h Visa/MC

BURTON SYSTEMS SOFTWARE

P. O. Box 4156, Cary, NC 27511-4156 (919) 469-3068

CIRCLE 212 ON READER SERVICE CARD

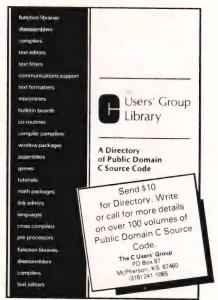

CIRCLE 181 ON READER SERVICE CARD

I	Cs SA	ROMF ME DAY S	PT DEL	IVER	Y!!!	
		E OKLAHO		LES TAX	301	
100		DYNAM	IC RAM	-		
ct.	1Mbit	1000Kx1	100 ns	\$30.00		
150 Vec	51258	*256Kx1	100 ns	6.95	* 110 h	
Zenith us; hp	4464	64Kx4	150 ns	3.24	STATION	
	41256	256Kx1		3.25	ORAMO	
S E	41256	256Kx1		2.59	FORPAC	
AD le 4	41256	256Kx1		2.39	CO.	
UPGRADE: Portable & F	4164	64Kx1	150 ns	1.30		
Por	27512	64Kx8	200 ns	\$11.75	88	
	27C256			4.95	5.09	
ТНЕВВО Сотра	27256	32Kx8		4.75	us in	
₽8.	27128	16Kx8		3.50	hz zr	
S F	27C64		150 ns	4.85	5 Mhz 8Mhz	
S S	2764	8Kx8		3.25	80	
64(BM F		STATI	CRAM	0.20	7	
	62256	32Kx8	120 ns	\$12.95	8087 8028	
	6264LP-	15 8Kx8	150 ns	2.95		
OPEN	61/2 DAYS.	7 AM-10 PM:	SHIP VIA	FED-EX C	N SAT	
SUNDA	YS & HOLIDAYS	: SHIPMENT				
SAT D	ELIVERY Ma:	sterCard VISA	or UPS CAS	H COD		
FED-EX ORDERS MICROPROCESSORS UNLIMITED, INC.						
	VED BY: 24,0	000 S. Peoria	Ave /010	1267-40	261	
	\$13/2 lbs BE	GGS, OK. 744	der. Please note	1201-43	901	
change. S	Shipping & insurant	ce extra. & up to 9	1 for nacking mate	riple Orders race	urd bayin	
Air (# \$6.	.00, or guaranteed	next day Priori	ly One @ \$13.00!	All parts quarante	ed.	

CIRCLE 105 ON READER SERVICE CARD

C CHEST

```
setnum ( &Divtrap , num, offset );
                         err("Passed diversion trap when trap set\n");
             /* .ec c
                                     -- Change escape character from \ to c. Use \ if c is missing.
              */
            Esc = *lstr ? *lstr : '\\' ;
            /* .el -- else clause part of .ie. This command is normally processed as part of the .ie command. If we get here, there is no corresponding .ie statement.
                         This command is not inhibitable
            err(".el not associated with .ie\n");
return 0;
em(str)
*str;
            /* .em xx -- Define xx as the end macro, executed after all output has been processed
             */
            Endm = strsave( str );
eo(str)
            *str;
char
                 .eo -- NOT AN NROFF COMMAND --
                         Disable the escape mechanism entirely. It
                         can be restored again with a .ec com
            Esc = -1 ;
         *
ev(str)
*str;
                                     -- MODIFIED NROFF COMMAND --
                        This command pushes various commonly used variables on an environment stack. Nroff supports several environments and the shell supports only one. If an argument is present, the current environment is save. If no argument is present, a previously saved environment is popped from the stack. See push env and the definition of the environment structure (both in nrmsc.c) for more information. The stack is five environments deep.
            if( *str )
                         push env();
            else
                        pop_env();
            Quit = 1;
fi( str. dobreak )
            /* .fi --
                                   enable line filling
           if( dobreak )
      brk();
                                                                                 (continued on page 78)
```

Our customers wrote this ad*

"You provide a great service to me as a professional programmer. You are #1 on my list. Keep up the excellent work!"

"Your company is a pleasure to do business with."

"With the service I have received from you, I am sure to look at Programmer's Connection next time I buy."

"It's a pleasure to deal with a company that understands the needs of the computer professional. Thanks."

"Your service and prices are outstanding. I'm glad I found you."

"I appreciate your professional attitude. It's refreshing."

"You're the best in the business! Keep it up!"

"Keep up the good work. I like the way you stay up to date."

"I appreciate your courteous, reliable service."

"This method of purchasing software allows good selection and convenience."

"Good products and great prices!"

"Thanks for providing prompt, reliable service and delivery."

"I'm extremely happy — just placed my 6th order."

"As a dealer specializing in programming, I've found that you are my best source."

"It's unusual to find a company that offers the best price and the best service. Programmer's Connection does — keep up the good work!"

"You have the best prices."

"I particularly like your pricing policy — lower than anyone else and no extras for shipping, credit cards, etc. Keep up the good work!"

"If only all the companies I used were as good as Programmer's Connection!"

"An oasis in the mail-order desert. Keep up the excellent work!" "Class "A" performance!"

"Very pleasant, helpful order taker. I'm impressed."

"You are the FIRST place I go for professional software products. Thanks! (Especially for your 30-day trial service)."

"Product was out of stock, but shipped exactly as I was told it would be Good Job!"

"Anything you carry, I buy from you. You can teach your competition a lesson!"

"You have great service! You have the best prices!"

"Amazing — no problems — I'll be back."

"There is a lot of competition in your field, but Programmer's Connection is the best!"

"Probably the best service of any well advertised company."

"I always recommend you when asked where to buy software."

"Enjoy dealing with you. Great service, good people. Will continue doing so."

"The best service for professional users in the country."

"You have both lowest prices and best service — a great combination! Keep up the good work."

"You guys are SUPER."

"Technical staff very helpful."

"I have not found any mail order company with such competitive prices whose people are as helpful and knowledgeable as yours. I truly appreciate it and will order more from you. Keep up the good job."

"Once again, it was a pleasure dealing with you."

"I'm extremely satisfied with all aspects of your operation with which I am familiar."

"Good service at very good prices. I plan to make all purchases from you."

"You sell up-to-date products at reasonable prices and good support."

"Thank you for all your courteous assistance."

"Excellent service. I most definitely will be purchasing from you in the near future. Keep up the good work."

"Impressive service and pricing. I'll recommend you to my friends."

"Your prices are the best! It's great that you pick up the shipping charges and charge no sales tax (for me anyway). The price I see advertised is the price I pay, period."

"GOOD JOB!"

"Programmer's Connection is really outstanding. Good prices, prompt shipment, no extra fees. Wonderful 30day trial."

"Best packaging I've ever seen. Your people are great! Keep it up."

"I referred you to two others because they could not get current versions from other vendors."

"Your service is unusual for purchasing software."

"The person who took my phone order seemed to be genuinely eager to help me, not just get an order. Thanks."

"Ilike having no surcharge on credit cards and no shipping charge. There is no hidden cost."

"Good products + good service + good prices + happy customers. Keep it up."

"Excellent response time."



*Comments offered by people responding to our customer service questionnaire.

Turn the page for our latest advertised price list.

CIRCLE 129 ON READER SERVICE CARD

ai - arity products	1005	070	Sidekick & Traveling Sidekick	125 85	85 57	essential products		
Arity Combination Package	1095	979 229	Traveling Sidekick Superkey New Version	70	45 64	Special Offers Available. Call for Details. C Essentials by Essential Software	100	75
File Interchange Toolkit	50 650	44 569	Turbo BASIC Compiler	100	64	C Utility Library	185 250	119 189
Screen Design Toolkit	50 295	44 229	Turbo C Compiler	100	64 41	Essential Comm Library Software Only	185	125 89
Arity PROLOG Interpreter	295	229	Turbo Editor Toolbox	70 70	41 41	Breakout Debugger Any language	125 250	183
Arity Standard Prolog	95	77	Turbo Graphix Toolbox Turbo Jumbo Pack Combination Package New	70 300	41 219	forth language		
ai - expert systems 1st-CLASS by Programs in Motion	495	399	Turbo Lightning	100	64	CFORTH Native Code Compiler by LMI Forth/83 Metacompiler Specify Target	300 750	229 599
AutoIntelligence by IntelligenceWare	990	739	Turbo PASCAL Numerical Methods Toolbox	100	64 85	PC/Forth by Laboratory Microsystems	150	109
ExpertEDGE Advanced by Human Edge	2500 5000	CALL	Turbo PASCAL Turbo Tutor	100	64 24	PC/Forth+ by Laboratory Microsystems	250 100	195 74
Experteach II by IntelligenceWare EXSYS Development Software by EXSYS	475 395	339 309	Turbo PROLOG Compiler	100	63	Enhanced Graphics Support	200	148 74
EXSYS Runtime System	600 95	469 75	Turbo PROLOG Toolbox	100	64 47	Interactive Symbolic Debugger	100	74
Insight 2+ by Level Five Research	485	379	Word Wizard and Turbo Lightning	150	94	Native Code Optimizer	100	148 74
Intelligence/Compiler IntelligenceWareLogic-Line Series 1 by Thunderstone	990	739 85	C++			UR/Forth by LMI Object Module Libraries	350 500	275 395
Logic-Line Series 2 by Thunderstone Logic-Line Series 3 by Thunderstone	125 150	115 139	C++ by Guidelines w/version 1.1 kernel	195	172	Source Code License		995
ai - lisp language	130	133	PforCe++ Function Library by Phoenix Sale	395	209	fortran language		
GCLISP Golden Common USP by Gold Hill	495	CALL	ccompilers			50 MORE: FORTRAN by Peerless Engr	125	95 389
GCLISP 286 Developer by Gold Hill	1190	CALL	68000/10/20 Cross Compiler by SDS	595 497	CALL	Essential Graphics by Essential Software For-Winds Alpha Computer Service	250 90	183 69
IQLISP by Integral Quality New Microsoft LISP Common LISP	270	CALL	Datalight C Compiler Small Model	60	43	Forlib-Plus Alpha Computer Service	70	44
ONIAL Combines IISP & API by NIAI Systems	250 375	149 339	Datalight Developer Kit Datalight Optimum-C	139	74 109	FORTLIB by Sutrasoft FORTRAN Addendum by Impulse Engr	125 95	109 85
TransLISP from Solution Systems TransLISP PLUS from Solution Systems	95 195	CALL	DeSmet C w/Debugger & Large Case	209 159	184 138	FORTRAN Addenda by Impulse Engr	165 175	138 159
ai - prolog language			Eco-C Development System by Ecosoft	125	83	HALO by Media Cybernetics	300	205
APT Active Prolog Tutor from Solution Systems	65	CALL	Lattice C Compiler from Lattice Mark Williams Let's C Combo Pack	500 125	265 99	I/O PRO by MEF Environmental Microcompatibles Combo Package	149	129 215
LPA microPROLÖG All Varieties	CALL 50	CALL 45	Let's C Compiler	75 75	54 54	Grafmatic Plotmatic	135	117 117
MPROLOG P500 by LOGICWARE MPROLOG P550 by LOGICWARE	495 220	395 175	Microsoft C with CodeView Turbo C Compiler by Borland Intl	450	269	Microsoft FORTRAN w/CodeView	450	269
Prolog-86 from Solution Systems	125	CALL	Turbo C Compiler by Borrana Inti	100	64	No Limit by MEF Environmental	129 295	109 CALL
Prolog-86 Plus from Solution Systems	250 100	CALL 63	cinterpreters			PANEL by Roundhill Computer Systems	295 175	CALL 159
Turbo PROLOG Toolbox by Borland Intl	100	64	C-terp by Gimpel, Specify compiler C Trainer with Book by Catalytix	300 122	219 87	PLOTHP by Sutrasoft	175	159
ai - smalltalk language	00	0.4	Instant C by Rational Systems	500 125	369	RM/FORTRAN Ryan-McFarland	595 325	CALL
Smalltalk/V by Digitalk EGA Color Option	99 49	84 45	Run/C by Age of Reason	120	CALL 79	Scientific Subroutine Lib by Peerless Statistician Alpha Computer Service	175 295	128 235
Goodies Diskette	49 49	45 42	Run/C Professional by Age of Reason	250	157	Statlib.GL: by PSI/Systems New Statlib.TSF: by PSI/Systems New	295 295	239 239
ai - texas instruments			c utilities			Strings & Things Alpha Computer Service	70	45
PC Scheme Lisp	95	84	C to dBase by Computer Innovations	150 650	CALL 519	greenleaf products		
Personal Consultant Easy	495 2950	435 2589	c-tree ISAM File Manager r-tree Report Generator	395 295	315 239	Greenleaf Comm Library	185 225	125 157
Personal Consultant Runtime	95	84	C Windows by Syscom	100	85	with Source Code	450	289
api language			C Wings by Syscom CI ROMPac by Computer Innovations	50 195	CALL	Greenleaf Functions	185	125
APL*PLUS/PC by STSC	595 195	424 139	dBx dBase to C Translator by Desktop Al	350 550	299 349	help utilities		
APL*PLUS/PC Tools Vol 1 by STSC APL*PLUS/PC Tools Vol 2 by STSC	295 85	199 58	Various Support Utilities	CALL	CALL	HELP/Control by MDS	125 149	99 99
Financial/Statistical Library nv 5/5/.	275	189	Entelekon Products	CALL 90	CALL 78	SoftScreen/HELP by Dialectic Systems	195	149
Pocket APL by STSC STATGRAPHICS by STSC	95 795	69 579	GraphiC Color version by Sci Endeavors	350 280	282	lattice products		
assembly language			GRAFLIB by Sutrasoft HALO Graphics by Media Cybernetics	175 300	159	Lattice C Compiler from Lattice	500 900	265 495
386 ASM/LINK Cross Asm by Phar Lap 8088 Assembler w/Z-80 Translator by 2500 AD	495 100	389 89	HALO Development Pkg for Microsoft	595	205 389	C Cross Reference Generator	50 200	37 139
ASMLIB Function Library by BC Assoc	149	125	The HAMMER by OES Systems PANEL Forms Management by Roundhill	195 295	129 CALL	C-Food Smorgasbord Function Library	150	95
asmTREE B-Tree Dev System by BC Assoc	395 CALL	CALL	PANEL Plus by Roundhill New PC Lint by Gimpel Software	495 139	CALL 99	with Source Code C-Sprite Source Level Debugger	300 175	179 128
Microsoft Macro Assembler	150 100	93 59	PLOTHI by Sutrasoft	175	159	Curses Screen Manager	125 250	88 174
screenplay by Flexus Turbo EDITASM by Speedware	100	79 84	PLOTHP by Sutrasoft	175 89	159 79	dBC II Specify dBC II or dBC III	250	169
Uniware Cross Assemblers Various by SDS	295	249	Scientific Subroutine Library by Peerlessscreenplay for C by Flexus	175 175	128 129	with Source Code dBC III Plus	500 750	CALL
Visible Computer: 8088 Software Masters	80	64	Vitamin C by Creative Programming VC Screen Forms Designer	225 100	158 79	with Source Code New LMK Make Facility	1500	CALL 138
basic language 87 QB Pak <i>by Hauppauge</i>	69	59	Zview by Data Mgmt Consultants Special Offer	245	CALL	RPG II Combo All three items below	1100 750	875 625
87 Software Pak by Hauppauge EXIM Services Toolkit by EXIM	180	149	cobol language			RPG II SEU Screen Entry Utility	250	199
Finally by Komputerwerks	50 99	45 85	COBOLspil by Flexus New	395	329	RPG II Sort/Merge	250 350	199 309
Inside Track from Micro Help MACH 2 by Micro Help	65 69	51 55	EASY SCREEN by Retail Mgmt Systems New FPLIB for Realia COBOL by BC Associates New	225 149	199 129	SecretDisk File Encryption Utility SideTalk Resident Communications	120	88
MACH 2 for Turbo BÁSIC by Micro Help New Microsoft QuickBASIC Compiler	69 99	55 63	Micro Focus COBOL See Micro Focus Section Microsoft COBOL See Microsoft Section			SSP/PC Scientific Subroutine Library	350 120	269 88
Peeks 'n Pokes from MicroHelp Professional BASIC by Morgan	45	37	Realia COBOL RealCICS	995	783	TopView Toolbasket Function Library	250	178
8087 Math Support	99 50	68 42	RealMENU New	995 150	783 119	with Source Code	500	356
QuickPak by Crescent Software New Scientific Subroutine Library by Peerless	69 125	59 99	RM/COBOL by Ryan-McFarland	950 1250	639 895	metagraphics products		
Stay-Res by MicroHelp	95 245	73 179	screenplay for COBOL by Flexus	175	129	LightWINDOWS / C for Datalight C New MetaWINDOWS No Royalties	95 185	79 109
True Basic New Version	150	97	debuggers & profilers			MetaFONTS	80 235	58 184
Run-time Module	150 50	97 41	386 DEBUG Cross Debugger by Phar Lap	195 175	129 115	MetaFONTS/Plus TurboWINDOW Graphics/Windows for Turbo Pascal	235	184 58
Turbo BASIC Compiler by Borland Intl	100	64	Cl Probe by Computer Innovations	225	CALL		00	30
blaise products ASYNCH MANAGER Specify C or Pascal	175	119	Codesifter Profiler by David Smith	119 145	85 98	micro focus products Micro Focus COBOL Workbench	4000	2270
C TOOLS PLUS	175	119	DSD87 by Soft Advances	125 395	99 CALL	Micro Focus Level II COROL Special Pricing	1500	3379 549
LIGHT TOOLS for Datalight C	100	73 78	Periscope I with Board by Periscope Periscope II with NMI Breakout Switch	345 175	289 139	COMATH	250 200	199 159
PASCAL TOOLS 2	125 100	94 74	Periscope II-X Software only	145	105	FORMS-2	300 895	259 769
PASCAL TOOLS & TOOLS 2	175 50	119 43	Periscope III w/Advanced Board New The PROFILER with Source Code by DWB	995 125	CALL 89	Level II Animator Level II SOURCEWRITER Micro Focus Personal COBOL New	995 149	849
TURBO POWER TOOLS PLUS	100	78 78	The WATCHER Profiler by Stony Brook	60	51	Micro Focus Professional COBOL	3000	2549
VIEW MANAGER Specify C or Pascal	275	179	dos utilities			Multi-user Runtime for PC Network	500	399
borland products			Command Plus by ESP Software New FANSI-CONSOLE by Hersey Micro	80 75	69 62	microport products		
Reflex & Reflex Workshop	100 200	64 128	Norton Commander by Peter Norton	139 75	99	System V/AT by Microport Systems New Version Runtime System (Operating System)	549 199	475 189
Reflex Data Base System Reflex Workshop	150 70	89 45	SCIOII & Mecall hv (Int-Iech (lata	69	55 59	Text Preparation System	249 199	235 189
			Taskview by Sunny Hill Software CIRCLE 129 ON READER SERVICE CA	80 RD	56	User Upgrade 3 to Unlimited Users	249	235
			THE CA					

microsoft products			raima products		
Microsoft BASIC Interpreter for XENIX	350	209	dbQUERY Single-User Query Utility	195	129
Microsoft C with CodeView	450 700	269 429	Single-User with Source Code	495	389 389
for XENIX	995	609	Multi-User with Source Code	990 195	799 129
Microsoft FORTRAN w/CodeView	450 695	269 419	dbVISTA Single-User DBMS	495	389
Microsoft Learning DOS	50 250	36 149	Multi-User	495 990	389 799
Microsoft MACH 10 w/Mouse & Windows	549	369	Wall-Oser with Source Code	000	
Microsoft MACH 10 Board only Microsoft Macro Assembler	399 150	279 93	sco products		
Microsoft Mouse Bus Version	175 195	114 124		1295	994
Microsoft Mouse Serial Version	300	179	Development System	595 595	499 499
Microsoft Pascal Compiler for XENIX	300 695	179 419	Text Processing Package Networks for XENIX by SCO	195 595	144
Microsoft QuickBASIC Compiler	99 195	63 125	SCO Professional Lotus clone for XENIX	795	595
Microsoft Sort	99	63			
Microsoft Windows Development Kit	500	299	softcraft products	245	104
modula-2 language			Strieve ISAM Mgr with No Royalties	245 245	184 184
IOTools by Rhodes Associates New with Source Code New	80 950	CALL	Report Option for Xtrieve	145 595	99 454
MODULA-2 Apprentice Pkg by LOGITECH New	99	79 79	Xtrieve/N	595 345	454 269
MODULA-2 Magic Pkg by LOGITECH New MODULA-2 ROM Pkg & Cross RT Debugger New	299	239	Report Option/N for Xtrieve/N	343	203
MODULA-2 Window Pkg by LOGITECH New MODULA-2 Wizard's Pkg by LOGITECH New	199	39 159	solution systems produ	ct	5
REPERTOIRE for MODULA-2 by PMI	89	79	APT Active Prolog Tutor	65	CALL
Object Code Only	19	15	Brief & dBrief Combo	250 195	CALL
mouse products	110	98	dBrief Customizes Brief for dBase III	95 75	CALL
With PLUS & PC Paintbrush	119 169	134	C ToolSet	95 95	CALL
with PLUS & CAD Software	189 219	153 179	Faster C Prolog-86	125	CALL
LOGIMOUSE C7 with PLUS Pkg, Specify Connector	119	98	Prolog-86 Plus Security Library	250 125	CALL
with PLUS & PC Paintbrush	169 189	134 153	with Source Code	250	CALL
with PLUS & CAD & Paint	219	179	TransLISP	95 195	CALL
other languages			ZAP Communications	95	CALL
CCS MUMPS Single-User by MGlobal	60 150	49 129	text editors		
CCS MUMPS Single-User/Multi-Tasking	450	359	Brief from Solution Systems	195	CALL
Janus/ADA C Pak by R&R Software	95 900	84 769	Epsilon Emacs-like editor by Lugaru	195 125	147 98
Janus/ADA ED Pak by R&R Software New	395 189	CALL 155	Micro/SPF by Phaser Systems	175	139
Marshal Pascal by Marshal Language Systems New Personal REXX by Mansfield Software	125	99	PC/VI by Custom Software Systems	149 245	99 175
SNOBOL4+ by Catspaw	95	79	Vedit by CompuView	150 185	98 128
other products			Veuit Fius by Comparier	.00	120
Dan Bricklin's Demo Pgm Software Garden	75 50	57 45	turbo pascal utilities		
Disk Optimizer by Softlogic Systems New	60	55	ALICE Interpreter by Software Channels	95 75	66 67
FASTBACK by 5th Generation Systems	179	133 79	Flash-up Windows by Software Bottling	90	78
Net-Tools by BC Associates New OPT-Tech Sort by Opt-Tech Data Proc	149	129 99	MACH 2 for Turbo Pascal by Micro Help New MetraByte D/A Tools by Quinn-Curtis New	100	55 89
Screen Machine by MicroHelp New	79	59	Science & Engrg Tools by Quinn-Curtis New Screen Sculptor by Software Bottling	75 125	67 91
VTEK Term Emulator by Sci Endeavors	150	129	screenplay for Turbo Pascal by Flexus	100	79
phoenix products	105	400	Speed Screen by Software Bottling	35 100	CALL
Pasm86 Macro Assembler Version 2.0	195 145	108	IMPEX Query Utility Report Builder	75 75	CALL
Pfantasy Pac Phoenix Combo Sale Pfinish Execution Profiler Sale	1295 395	799 209	TDebugPLUS by TurboPower Software	60	49
Pfix86plus Symbolic Debugger Sale	395	209	Turbo EXTENDER by TurboPower Software	85 70	64 45
PtorCe Comprehensive C Library Sale PtorCe++ Library for Guidelines C++ Sale	395 395	209 209	TurboHALO from IMSI TurboPower Utilities by TurboPower	129 95	98 78
Plink86plus Overlay Linker	495 125	279 78	TurboRef by Gracon Services	50	45
Pmate Macro Text Editor	195	108	TURBOsmith Visual Age Debugger Special Price	69	45
Pre-C Lint Utility	295 195	154 108	wendin products		
polytron products			Operating System Toolbox Rebate Offer	99	75
PolyBoost The Software Accelerator	80	64	PCNX Operating system Rebate Offer PCVMS Similar to VAX/VMS Rebate Offer	99	75 75
PolyLibrarian <i>Library Manager</i> PolyLibrarian II <i>Library Manager</i>	99	73 109	XTC Text Editor w/Pascal source Rebate Offer	99	75
PolyMake UNIX-like Make Facility	149	109	(vely products		
PolyShell	50	42	Renix / unix products Btrieve ISAM File Mgr by SoftCraft	595	454
Polytron C Library I	99 139		C-terp by Gimpel, Specify compiler	498 395	379 315
PolyWindows Products All Varieties	CALL	CALL	c-tree ISAM Mgr by FairCom		
PolyXREF Complete Cross Ref Utility PolyXREF One language only	129	99	dBx with Library Source by Desktop Al DOSIX Console Version by Data Basics	550 399	CALL
PVCS Corporate Version Control System New PVCS Personal New	395 149		DOSIX User Version by Data Basics	199	CALL
			Micro Focus Level II Compact COBOL	400	CALL
program mgmt utilities	55	44	Level II ANIMATOR	600	CALL
Compact Source Print by Aldebaran	150	125	Microsoft Products See Microsoft Section	CALL	CALL
Print(1) by Software Directions	199	159	DEAL TOOLS Pinney Varsion by PCT	149	89
QMake Program Rebuild Utility	125		Library Source Version	399 499	369
Source Print by Aldebaran Labs TLIB by Burton Systems Software	100	59	RM/COBOL by Ryan-McFarland RM/FORTRAN by Ryan-McFarland	1250 750	
Tree Diagrammer by Aldebaran Labs	55		SCO Products See SCO Section		

LOWEST PRICES

Due to printing lead times, some of our current prices may differ from those shown here. Call for latest pricing.

FREE SHIPPING

Orders within the USA (including Alaska & Hawaii) are shipped FREE via UPS. Express shipping is available at the shipping carrier's standard rate with no rush fees or handling charges. To avoid delays when ordering by mail, please call first to determine the exact cost of express shipping.

CREDIT CARDS

VISA and MasterCard are accepted at no extra cost. Your card is charged when your order is shipped. Mail orders please include credit card expiration date and telephone number.

CODs AND POs

CODs and Purchase Orders are accepted at no extra cost. POs with net 30-day terms are available to qualified US accounts only.

FOREIGN ORDERS

Shipping charges for foreign and Canadian orders are based on the shipping carrier's standard rate. Since rates vary between carrier's standard rate. Or write for the exact cost. Foreign orders (except Canada), please include an additional \$10 for customs form preparation. All payments must be made with US funds drawn on a US bank. Please include your telephone number when ordering by mail. Due to government regulations, we cannot ship to all countries.

VOLUME ORDERS

Volume orders may qualify for additional discounts. Call us for special pricing.

SOUND ADVICE

Our knowledgeable technical staff can answer technical questions, assist in comparing products and send you detailed product information tailored to your needs.

30-DAY GUARANTEE

Most of our products (excluding books) come with a 30-day documentation evaluation period or a 30-day return guarantee. Please note that som anufacturers restrict us from offering guarantees on their products. Call for more information.

MAIL ORDERS

Please include your telephone number on all mail orders. Be sure to specify computer, operating system and any applicable compiler or hardware interface(s). Send mail orders to:


Programmer's Connection 136 Sunnyside Street Hartville, OH 44632

CALL TOLL FREE	
U S	 800-336-1166
CANADA	 800-225-1166
OHIO & ALASKA (Call Collect)	 216-877-3781
TELEX	 9102406879
FOREIGN	216-877-3781

CUSTOMER SERVICE..... 216-877-1110

Hours: Weekdays 8:30 AM to 8:00 PM EST.

Ohio customers add 6% state sales tax. Prices are subject to change without notice. Copyright Programmer's Connection, Inc., 1987.

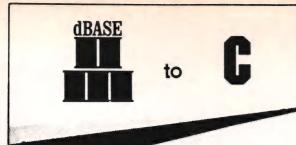

the dBx™ translator

- dBx produces quality C direct from dBASE II or III programs.
- Move dBASE programs to UNIX or other machines.
- Improve program speed and reliability.
- Support multi-user/network applications.
- With power guidebook of conversion hints.
- Includes full screen handler and uses your current C database manager.
- May be used to move existing programs or help dBASE programmers learn C easily.
- For MSDOS, PCDOS, UNIX, XENIX, Macintosh, AMIGA.
 (Uses ANSI.SYS driver on MSDOS, CURSES under UNIX)
- Priced from \$350, also available from distributors.

dBx is a trademark of Desktop Ai

1720 Post Road E., Westport, CT 06880 MCIMAIL • DESKTOPA Phone • 203•255•3400 Telex • 6502972226MCI

CIRCLE 258 ON READER SERVICE CARD



The SLR SuperLinker Plus is 3 - 10 times faster than any other linker, and look at these features:

- link a full 64K output (COM, HEX, SPR or PRL)
- · works with Microsoft, Fortran, Basic, Cobol
- supports 32 character externals (SLR format)
- full drive/user support with alternate DU search
- supports 8 address spaces
- · fill uninitialized spaces with 0 or FF
- · global cross reference
- DSD80/SID compatible .SYM file
- manual overlays

load map

\$195

requires Z80 CP/M 2.2 or greater 32K TPA

SLR_Systems

1622 N. Main St., Butler, PA 16001 (800) 833-3061 (412) 282-0864 Telex 559215 SLR SYS

CIRCLE 78 ON READER SERVICE CARD

C CHEST

```
/* .ft F -- Change font to F at the

beginning of the next

input text line. Font changes can also be

imbedded with a \fF escape sequence. Note that

if font F doesn't exist, the error won't be

flagged until the output routines try to process

the font change request. F may be a number that

was fetched from the \n(.f number register at


some earlier time. .ft 0 is the same as .ft R.

//
                   chgfont( *str );
hd( num, str, offset, dobreak, tail )
char *str;
                   *tail:
char
                   /* .hd <left str> N <right str> -- NOT NROFF ---
                     Define strings to send printer cursor left or right by 1/N spaces. The width of a space is taken from the currently active font width table. It will be 1 in the default, non-proportionally spaced font. N determines the minimum resolution for the space between characters in proportional spacing mode.
                   static char lstr[81];
static char rstr[81];
                   strncpy( lstr, str , 80 ); lstr[80] = 0; strncpy( rstr, tail, 80 ); rstr[80] = 0;
                  Left_str = lstr;
Right_str = rstr;
Hs_amt = num;
hy ( num )
                   /* .hy [N]
                                                -- MODIFIED NROFF COMMAND --
                                      Enable hyphenation. N is ignored.
                   Hyphenate - 1;
id( lstr, rstr )
char *lstr, *rstr;
                   /* .id on off -- NOT AN NROFF COMMAND ---
                     * Send "on" to the printer to put it into italics
* (underline) mode, rstr to take it out. Maximum
* length of either string is 80 characters. Use
                          \x<two hex digits> to send a control character.
                  static char on[81], off[81]; on[80] = off[80] = 0;
                  strncpy( on, lstr, 80 );
strncpy( off, rstr, 80 );
                  Ul on - on;
Ul off - off;
doif( expr, action
                   /* Test an expression and do an if statement (or

the if part of a .ie. Set Inhibit as appropriate.

Modify Inhibit to reflect the expression.

We call process if input is inhibited in order
to handle nested if's and blocks. Return 1 if
input was not inhibited and we executed the
expression, otherwise return 0.
                  int
                                      rval - 0;
                   if (!Inhibit)
                            if( startexpr(expr) )
    Inhibit = ! (int) parse( &expr );
                            else if ( *expr == 'e' )
                                                                                     (continued on page 80)
```

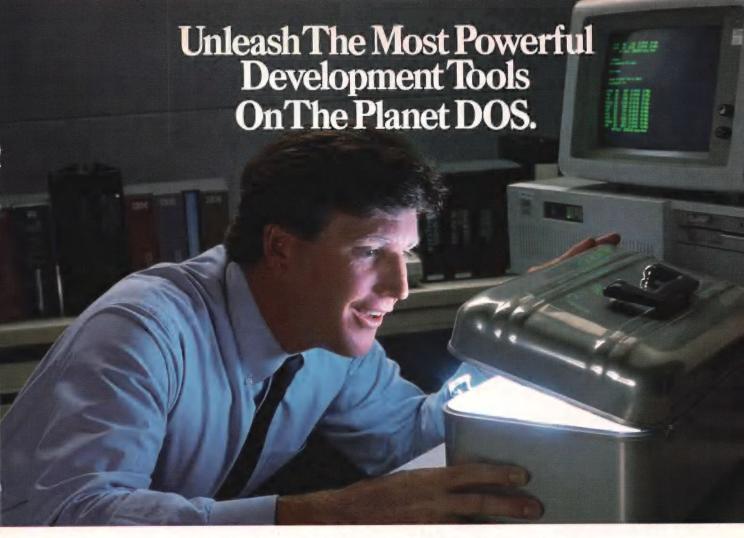

UNIFY DBMS/DOS. The UNIX World Leader Brings A New Dimension To DOS Application Development.

What happens as the DOS world expands? As a new generation of hardware takes over? As networking becomes more important? The potential is enormous. But until now, the tools to achieve it have been limited.

Now a leader from another world unleashes that potential: UNIFY® DBMS. The leading relational DBMS in the UNIX™ world. And now, the most advanced set of application development tools in the DOS world.

With UNIFY DBMS, DOS developers have new power to build more sophisticated applications than ever before possible.

The power to write high performance "C" programs that will access the data base, using Unify's Direct Host Language Interface.

The power of an industry standard

query language-SQL.

The power of unmatched speed in production applications. Only UNIFY DBMS is specifically engineered for transaction throughput. With unique performance features like PathFinder™ Architecture multiple access methods, for the fastest possible data base access.

The power of comprehensive program development and screen management tools. Plus a state-of-the-art fourth generation report-writer.

What's more, with UNIFY DBMS, the potential of networked applications becomes a reality. Unlike DBMS systems which were originally single-user (and which have a long stretch to accommodate more users), UNIFY DBMS is a proven multi-user system.

And because UNIFY DBMS/DOS is the best of two worlds, it offers you the most powerful benefit of all: DBMS applications that can grow as your needs grow. From single user DOS. To networked DOS. To multi-user UNIX. All without changing your applications.

Call the Unify Information Hotline for our free booklet: The New DOS World. (503) 635-7777

CORPORATION

4000 Kruse Way Place Lake Oswego, OR 97034

© 1986 Unify Corporation. UNIX™ is a trademark of AT&T Bell Laboratories.

CIRCLE 332 ON READER SERVICE CARD



- * Smallest code from ANY compiler.
- * Macro assembler, linker, librarian, debugger included.
- * Can produce ROM code.
- * Full library source.
- ★ Excellent diagnostics.

AND MUCH MORE -THIS IS A COMPLETE PRODUCTION-QUALITY COMPILER





Order from: SOFTFOCUS 1343 Stanbury Drive, Oakville ONTARIO Canada L6L2J5 (416) 825 0903 or (416) 844 2610

AUSTRALIA:
Southern Pacific Ltd. Hi-Tech Software IAPAN. (045) 314 9514

(07) 38 6971

CIRCLE 376 ON READER SERVICE CARD

SCREEN MASTERS A PROGRAMMER'S

ONLY \$9995

A DP MANAGER'S **BEST FRIEND**

PURE GENIUS IS NOT ENOUGH

(YOU STILL NEED THE RIGHT TOOLS)

- DESIGN MENUS
- CAPTURE SCREENS
- CREATE PROTOTYPES
- **CREATE DEMOS**
- CREATE TUTORIALS
- RUN TIME MODULE

ENHANCE HIGH LEVEL LANGUAGES WITH FULL ACCESS TO ALL CAPABILITIES IN YOUR OWN CODE

- "source code was reduced by one third..."
- "15 minutes to design a sophisticated screen..." Scott McCaffrey, Musco of PA

"In a word, fantastic..."

"...I just returned my copy of Dan Bricklin's Demo Program." Thomas Emr, Dir. of Marketing - ADP Inc.

DATA SYSTEMS

80

5403 Jonestown Rd., Harrisburg, PA 17112 (717) 652-1200

CIRCLE 373 ON READER SERVICE CARD

```
Inhibit = (PAGE 4 1):
                 else if( *expr == 'o')
Inhibit = !(PAGE & 1);
                        Inhibit = 1:
                        err("Illegal expression\n");
                  rval = 1;
            process ( action, Ifilename, 2, Macv );
            return rval:
iff(lstr, rstr)
char *lstr, *rstr;
            /* .if condition action
                        Simple if statement (doesn't take an else clause). The expression parser used to evaluate the condition> is more powerful than NROFF's. Multi-line blocks can be used by using a .( as an action. (be sure to terminate the block with a .)
                        If input is inhibited we want to process
                        The tail without modifying the inhibit status (in case the tail is a . (command; otherwise we set inhibit based on the value of the expression and then process the tail.
                        This command is not inhibitable
            if( doif(lstr, rstr) )
    Inhibit = 0;
            return 0:
            *iselse( str )
           *str:
char
      /* Used by ie() (below) returns 0 if str doesn't
  hold a legal .el command, otherwise returns
  * a pointer to just past the 'l'.
      if(!ISCMD(*str++))
    return 0;
      while ( isspace (*str) )
      return( str[0] == 'e' && str[1] == '1' ) ? str+2 : 0 ;
ie(lstr, rstr)
char *lstr, *rstr;
      /* .ie condition action -- MODIFIED NROFF COMMAND
           if part of an if/else. Is only non-standard in that the expression parser is more powerful than NROFF's
           This command is not inhibitable
      static char
                                     line [MAXSTR], lnum;
      int
                                    did something;
             Remember the current line number for the sake of the error message printed when we can't find an else clause.
      lnum = INLINES ;
      did something = !Inhibit;
doif( lstr, rstr );
      if( !getline(line, 0, Ismacro? mgetc: fgetc) || !
                  err("Missing .el for .ie on line %d\n", lnum );
     else
```

C BRICKLIN RUN

Data Entry • Menus • Windows • Prototyping • Database • Toolkit

C-scape

■ Total Screen Control/Easy to Use

C-scape is a combination screen generator and library of screen I/O functions. Written for C programmers, C-scape brings a proven approach to the need for an easy-to-learn and use, but truly powerful and flexible screen management tool.

C-scape's kernel is your most powerful ally. Without requiring parameters you'll never use, it allows you to create tailored functions with ease and simplicity. Each key is individually definable. If you know *printf()*, you can use C-scape. C-scape's kernel provides a veritable screen design and construction toolkit to rewrite our functions or to write your own.

■ Most Powerful Prototyping Available

C-scape offers a unique approach to prototyping your software. You may use **Dan Bricklin's Demo Program** to create, edit, and view your screens (you can even capture existing screens from other programs), and then use C-scapes's **demo2c** utility to convert each screen to code. You can design each screen with attributes such as colors, menu selections, data entry fields (including type, validation, and field naming), masking, and text, and then automatically convert the entire screen to code.

■ Powerful Function Library

Use C-scape's functions for Lotus-like, pull-down, or your own menu designs, automatic scrolling, pop-up windows (number limited only by RAM), logical colors, help, time and date, yes/no, tickertape fields, secure and protected fields, and many others, to turn your demo into a fully functioning and complete program in a fraction of the time spent coding screens from scratch.

C-scape's extensive library includes just about all the data entry and display functions you'll ever need, including money functions, fully definable borders, and orthogonal field movement (get the latest list by calling for more information). And modifying our functions or writing your own is easy. C-scape adjusts automatically for CGA, EGA, monochrome, and the Hercules Graphics Card Plus in RamFont mode, and optionally writes directly to video memory, so it's flexible and fast.

■ Bridges to Power

C-scape includes examples of how to bridge to other powerful tools such as **c-tree** and **db_VISTA**. You'll be integrating demos to dictionaries to file handlers and database managers in no time. You can even use C-scape to provide the screen design for Al applications, using packages that support calls to C.

■ Clean, Complete Documentation

C-scape's documentation is a clear example of how to write for programmers in a hurry. A short introduction uses helpful examples to explain the C-scape design. Each function is documented separately. An index makes reference easy, and a quick-reference card provides a synopsis of each function.

■ Source Code Included/Portable/No Royalties/No Runtime License

Providing source code at no additional cost gives you the freedom to modify existing functions without raising cost as a barrier. The source code includes all the low level routines you might need to port C-scape to an unsupported machine or compiler. Speaking of barriers, you pay no royalties or runtime license fees, either.

■ Toll Free Support and Bulletin Board

To make your job even easier, we provide technical support (toll free), and access to our 24-hour Bulletin Board.

■ Easy Prices/Risk-Free Terms

Try C-scape for 30 days. If you are not satisfied, return it for a refund. When you register, we send you source code. Order C-scape today, or call toll free for more information. See why some very major companies are standardizing on C-scape.

C-scape (Lattice/Microsoft/others) Only \$199

C-scape with Dan Bricklin's Demo Program \$259

C-scape with DB Demo and db_VISTA (RAIMA) \$425

Please add \$3 for first class shipping; Massachusetts orders add 5% sales tax.

Oakland Group, Inc.

675 Massachusetts Avenue, Cambridge, MA 02139-3309



CALL NOW! 800-233-3733

617-491-7311

SAPIENS V8

A VIRTUAL MEMORY MANAGER FOR THE PC

> C PROGRAMMERS! LINK IN

EXPAND YOUR C COMPILER
8 MEGABYTES
ON A PC

- ★ VIRTUAL MEMORY MANAGER FOR C PROGRAMMERS ON THE IBM PC.
- ★ PROVIDES 8 MGS. VIRTUAL MEMORY WORKSPACE.
- ★ Link V8 libraries to C compilers MICROSOFT, LATTICE AND AZTEC.
- ★ FAST: LESS THAN 10% SPEED OVERHEAD
- ★ ADVANCED SOFTWARE EMULATION OF 64-BIT ARCHITECTURE



Sapiens V8 is for C programmers who want to develop PC applications that go beyond current memory restrictions of the PC and a 16 bit architecture.

- V8 is not dependent on add-on boards.
- Virtual stack library supports stack frame management and multiple return values.
- Virtual heap (vmalloc()) allows allocation of very large data structures.
- System requirements: Huge model C compiler, V8 uses 22-128 Kb core.



Sapiens Software Corporation 236 Mora St. Santa Cruz, CA 95060 408/458-1990

CIRCLE 168 ON READER SERVICE CARD

C CHEST

```
/* Intitialize rstr to point just past the
* .el, skip any white space and quotes if
                 * necessary. Then call process with the command tail as its argument.
                rstr = skipspace(rstr, Esc);
if( *rstr == '"' )
    *skipto('"', ++rstr, Esc) = 0;
               process( rstr, Ifilename, 2, Macv );
     ig(str)
*str;
           /* .ig -- Ignore input by writing to a dummy macro
          mwrite( (char *)0, str );
in( num, str, offset, dobreak )
char *str;
           /* .in [+-] N -- Change the indent level */
                     brk():
           setnum( &INDENT, num, offset );
it ( num, str, offset )
          num, offset ;
 int
           /* .it [+-]N xx Input line trap. Spring macro

* xx after N lines of input have been

* read. Only one input line trap may be active.

* A .it destroys a previous trap if on exists.
           if( !num || !*str )
                     /* Remove current input trap */
                     Itrap
                     Itrap_name[0] = 0;
return;
           setnum( &Itrap, num, offset );
           if ( Itrap <= 0 )
                     err(".it xx N: N may not be negative\n");
Itrap = -1;
           else
                     Itrap_name[0] = str[0];
Itrap_name[1] = str[0];
lc(str)
*str;
           /* .lc C -- Change leader character from . to C
          Leader = *str ;
11( num, str, offset )
char *str;
          /* .ll [+-]N -- Change line length to N
         setnum( &LINLEN, num, offset );
ls( num, str, offset )
char *str;
          /* .ls N -- Change line spacing to N spaces
```

```
if ( num >= 1 )
                            setnum( &LSPACE, num, offset );
              else
                             err("\".ls N\", N must be >= 1\n");
lt( num, str, offset )
char *str;
               /\star .lt [+-]N -- Change the length of a 3-part title \star/
              setnum( &Title_len, num, offset );
               /* .mc str [N] -- ENHANCED NROFF COMMAND --
                * Print the string, str, N spaces to the right
of the right margin. This differs from nroff,
which uses a single character rather than
a string. If str and N are both missing, the
margin character is disabled. The string is
limited to 20 characters (including any spaces
implied by N). If N is missing or 0, 2 is used.
*/
               static UCHAR
                                           buf[21];
               if ( num <= 0 )
               for( p = buf; --num >= 0 ; *p++ = ' ')
               strncpy( p, str, &buf[21] - p );
Rmarg_str = buf;
 mf( macro, file )
char *macro, *file;
                /= .mf xx file -- NOT AN NROFF COMMAND --
                 * Copy the contents of the macro xx to the

* indicated file. The macro may not be in

* use at the time. This command is particularly

* useful for saving a collected index that hasn't
                     been sorted yet.
               dump_mac( macro, file );
 ml ( str )
                /* .ml str -- NOT AN NROFF COMMAND
                  Like a mc but prints the string at the left
margin rather than the right margin. The page
offset must be at least as large as the string,
which is limited to 21 characters.
                static char buf[21];
                strncpy( buf, str, 20 );
Lmarg_str = buf;
  na(str)
*str;
                 /* .na -- Turn of adjusting
                Adjusting - 0;
  nb(str)
*str;
                 /* .nb -- NOT AN NROFF COMMAND --

Used in conjuntion with a .nm, will cause blank
lines to be numbered as well as nonblank lines.
Useful if you're using nr to format listings.

                Nm blanks - *str ;
```

#1 Lint for MS-DOS BUGG The professional diagnostic facility for C PC-lint lets you zap swarms of C bugs and glitches at a time. Now you can uncover the quirks, inconsistencies, and subtle errors that infest your C programs . . . waiting to bite you. PC-lint finds them all ... or as many as you want ... in one pass. Set PC-lint to match your own style. Outperforms any lint at any price ■ Full K&R support and common ANSI enhancements (even MS keywords) ■ Finds inconsistencies (especially in function calls across multiple modules!) ■ Modifiable library descriptions for 8 popular compilers ■ Super fast, one-pass operation ■ Suppress any error message Zillions of options PRICE \$139 · MC · VISA · COD Includes USA shipping and handling. Outside USA, add \$15. In PA add 6%. ORDER TODAY, 30-day guarantee Runs under MS-DOS 2.0 and up, and AmigaDOS. Uses all available memory. Trademarks: PC-lint (Gimpel Software).
MS. MS-DOS (Microsoft). Amiga (Commodore)

Gimpel Software

3207 Hogarth Lane, Collegeville, PA 19426

(215) 584-4261

MODULA-2

When you upgrade to the language of the 90's, don't bring along tools for languages of the 70's. Switch to RepertoireTM, from PMI: tools and subsystems designed specifically for Modula-2.

Partial list of utilities included in REPERTOIRE™:

- ★ DBMS: insertion, deletion and retrieval of keyed records; garbage collection and recovery of damaged files; variable-length records and fields; data and index stored together; convenient storage/retrieval of linked lists and unstructured text; nested fields; interactive file-searching expressions.
- ★ Screen Design/Display System: Much more than a windowing system. Design full-color and/or monochrome screens, forms, menus, etc. in your own editor. Screens obtain and check input, provide help and scroll within windows. Builtin natural language analysis system. New, with Release 1.4: Input text wraps and scrolls in multi-line fields.
- * Thoroughly-indexed, 300-page manual.
- ★ Full Modula-2 source code (over 600K); won't chain your programs to one machine or operating system.
- ★ Versions for Logitech and other compilers.

Over 400 Routines!

only \$89

OPTIONS:

- * Multi-Tasking Support System: Scheduler; Fast-Interrupt Handler; Multi-Tasking drivers for 2 serial ports, keyboard, printer. Includes full source code . . \$24

1

VISA/MC AMEX/COD/PO (503) 777-8844

BIX: pmi Compuserve: 74706, 262

The leading supplier of Modula-2 software components.

4536 S.E. 50th Portland, OR 97206

Call for free demo & documentation disk!

C CHEST

```
register int
            if( (i = TOTRAP) < num )
    prblank( i );</pre>
 nf( str, dobreak )
 char *str:
                                    Disable line filling, flushing the
             /* .nf --
                                 buffer first.
              */
            if ( dobreak )
            FILL - 0:
nh()
                                    Turn off hyphenation (that was
                                   turned on with a .hy command) .
             */
            Hyphenate = 0:
      /* . NM N M S
                                    -- MODIFIED NROFF COMMAND --
        * N = first line number
* M = only even multiples of M are printed
* S = print string after number
        * If you need to change M without changing N, use * .nm x M S where x is any non-number. Same goes for * .nr x x S.
        # If no arguments are specified turn off numbering
# but remember current line number etc. Use .nm x
# to resume where x is any non-numeric argument.
        * Bugs: The arrays gotten from malloc()
* for the S argument are never free()ed.
      extern double
                                    parse():
      if ( Nm on = *str )
            splitfields(&str, &p);
if( isdigit(*str) )
   LINE = (int) parse( &str );
                                                           /* Do N argument */
            splitfields(&p, &str);
                                                            /* Do M argument */
            if( isdigit(*p)
                  Nm_mult = (int) parse( &p );
                                                            /* Do S argument */
                  if( !(Nm_str = strsave(str)) )
                       err("Can't get enough memory for .nm\n");
Nm_str = " ";
nr( num, str, offset, dobreak, tail )
char *str;
            *tail;
char
            /* .nr R [+-]N [[-]M] -- ENHANCED NROFF COMMAND --
             * create or modify number register R by (to) N. If
* M is present, it is incremented when invoked
* with \n+x, \n+(xx, \n-x or \n+(xx. If M is absent,
* 1 is used. Unlike nroff, .nr, with no arguments,
* prints all currently defined number registers.
           if( *str - '\0')
                       pr_nregs();
                                                                                (continued on page 86)
```

The Advanced Programmer's Editor That Doesn't Waste Your Time

EPS ILON

- Fast, EMACS-style commands—completely reconfigurable
- Run other programs without stopping Epsilon—concurrently!
- C Language support—fix errors while your compiler runs
- Powerful extension language
- Multiple windows, files
- Unlimited file size, line length
 Supports large displays
- 30 day money-back guarantee Not copy protected
- Great on-line help system
- Regular Expression search

Only \$195



5740 Darlington Road Pittsburgh, PA 15217

for IBM PC/XT/AT's or compatibles

CIRCLE 135 ON READER SERVICE CARD

Personalize your computing environment.

The MKS Toolkit now contains the Korn shell command interpreter.

The MKS version of Bell Labs' Korn shell has this and more:

- the full power of the UNIX System V.2 Bourne shell
- the most requested features of Berkeley's C shell
- the full-UNIX utility of executable shell
- · command aliases
- interactive command-line facilities
- · previous command history and editing
- · a powerful programming language
- · shell variable expansion
- arithmetic evaluation

All this has been fine-tuned to create the optimum environment under DOS. The Korn shell is just one of over 100 commands - fully compatible with UNIX System V.2 - now contained in the MKS Toolkit, including the following:

awk	cat	chmod	cmp	ср	cpio	ctags	cut	date
dd	df	diff	du	echo	ed	egrep	ex	fgrep
file	find	head	help	join	lc	ls	more	mv
nm	od	paste	pg	prof	rm	sed	size	sort
split	strings	tail	time	touch	tr	uniq	vi	wc
and m	uch. muc	h more						

These programs run from the shell or command.com under DOS on machines such as the IBM PC, XT, and AT, the AT&T 6300, and most PC compatibles. Full documentation is included. Phone support is available 9-6 EST. Not copy protected.

Everything for only \$139. Mortice Kern Systems Inc.

43 Bridgeport Road East, Waterloo, Ontario, Canada N2J 2J4 (519) 884-2251 For information or ordering call collect:

Prices quoted in U.S. funds. MasterCard and VISA orders accepted. OEM and dealer inquiries invited. UNIX is a trademark of Bell Labs. MS-DOS is a trademark of Microsoft Corp.

CIRCLE 249 ON READER SERVICE CARD



Data&Windows, the window-oriented data-entry system from Magus, Inc., now supports more of your favorite compilers! If you use Microsoft C, Pascal, or FORTRAN, Manx Aztec C86, Mark Williams C Programming System, Lattice C, IBM C, MetaWare High C, MetaWare Professional Pascal, or Datalight Octions C, vice on use Data & Windows to Optimum C, you can use Data&Windows to quickly and easily create almost any user interface.

With Data&Windows, you draw your text, fields, and colors on the video display. You see exactly what you will get while you create it. The screen designer gives you maximum functionality in an editor-like environment. Fields have options for specifying character and data type validations, user-definable validations, protected (display only) fields, auto-crasing fields, retain data fields, and more. You can check the look and operation of the screen with test mode.

Screens are saved in Microsoft object file format. You simply link the screen files with your application, so screen and field information is stored in your program (EXE) file rather than in separate data files that must be present at runtime.

You get library routine support for fully overlapping and scrollable windows which use an approach called static windowing. This technique eliminates the need for replication of static data in dynamic memory. More than seventy library routines are available to manipulate your windows, control data entry and storage, create window-oriented menus, and more!

Get Started Quick! A thorough on-disk tutorial is provided so that you can begin creating useful screens the day you receive the product. Utility programs that document each screen and allow you to prototype (or simulate) your application complete the package.

Try It Out! Order your demo disk today. For \$5.00 (refundable when you buy the product), you will receive a copy of the screen generator, the tutorial, and on-disk documentation on the utility programs and library routines.

Data&Windows is \$345, or \$695 with library source code, and certain discounts are available. Be sure to specify which compiler(s) you use when ordering.

Call (713) 665-4109 for more information. Major credit cards accepted.

will soon become available.

REOUIREMENTS: IBM PC/XT/AT/JR or true compatible, DOS 2.0 or later, at least 128K free RAM, and one of the compilers listed above. Xenix support

IBM, IBM PC, IBM XT, and IBM AT are trademarks of International Business Machines. Microsoft and XENIX are trademarks of Microsoft Corporation. Aztec is a trademark of Manx Software Systems. High C is a trademark of MetaWare.

> MAGUS, INC. 4545 Bissonet Suite #114 Bellaire, TX 77401

CIRCLE 336 ON READER SERVICE CARD

QuickBASIC just got quicker with QuickPak

QuickPak is a superb collection of enhancements, subroutines, and instructional material designed to help you get the most out of programming in BASIC.

Powerful assembly language routines to give your programs more speed, more power, and full access to DOS and BIOS services. SORT all or part of a string array with one command! Complete windowing capability — display help screens instantly, overlay text. FIND any string or sub-string within an entire array regardless of capitalization — accepts wildcards. READ directories into your programs from any drive or not be DEAD NAMETS did receiver.

ress or capitalization—accepts y your programs from any drive or path. READ/WRITE disk sectors—create your own DOS utilities! MANY, many more programs included.

- Professionally written QuickBASIC routines and functions.

 Powerful input routines for text, dates, and numbers. Menus, scroll bars, date/time functions, and much more.
- The Assembly Tutor a complete guide to learning assembly language from a BASIC perspective. Learn how to create your own routines and extensions.
- Tips and Tricks book packed with clever ideas and techniques to help you be a better programmer.

You get all this, all of the source code for every program included, and a thirty-day money back guarantee for only \$69.00.

No royalties are required for using any of the QuickPak routines in your programs. Not copy protected, of course.



QuickPak

0

CRESCENT SOFTWARE

64 Fort Point Street, East Norwalk, CT 06855 (203) 846-2500

QuickPak requires Microsoft QuickBASIC or BASCOM, DOS 2.0 or higher. Visa, M/C, C.O.D., or checks accepted.

CIRCLE 379 ON READER SERVICE CARD

CANADA'S SOURCE FOR C

- Canadian Sales
 - Canadian Service
 - Canadian Technical Support
 - Canadian Product Knowledge

We specialize in programming & development software

LIFEBOAT • LATTICE • GREENLEAF • PHOENIX
SOFTCRAFT • MICROSOFT • BLAISE • ESSENTIAL

AGE OF REASON • DESMET • AZTEC

MARK WILLIAMS . GIMPEL . ROUNDHILL . GSS

HALO - FAIRCOM - RAIMA - INTEL - etc. - etc. -



Call for full price list—Dealer enquiries welcome



We know our products—we use them!

SCANTEL SYSTEMS LTD.


801 York Mills Rd., Don Mills, Ont., M3B 1X7 (416) 449-9252

CIRCLE 391 ON READER SERVICE CARD

C CHEST

```
Listing Twenty-six (Listing continued)
```

```
putnreg( str, 0, num, offset, 1, atoi(tail) );
ns( str)
             *str;
char
             Nospace = 1;
od(lstr, rstr)
                  .od on off -- NOT AN NROFF COMMAND --
                          Define two strings, one to enter overstrike mode on the printer (on) and a second to exit (off). Maximum string length is
                           80 characters.
             static char on[81], off[81]; on[80] = off[80] = 0;
             strncpy( on, lstr, 80 );
strncpy( off, rstr, 80 );
             Os_on = on;
Os_off = off;
os( num, str, offset )
             /* .os [+-]N
                                      -- NOT AN NROFF COMMAND --
                  Just like .ul except it overstrikes the next N input lines rather than underlining them.
             setnum( &Num_os, num, offset);
ou(str)
            *str ;
char
           .ou str -- NOT AN NROFF COMMAND --
            Output string directly to the current output, without going through the normal text processing mechanism. Line number, adjusting, etc. will not be affected. This command for sending control sequences directly to the printer (ie. for initializations etc. Use \x<2 hex digits to send non-printing characters. The top bit of the character is trimmed off before transmitting, so you can send an ASCII null as a "\x80". Also note that the -c flag (which causes control characters to be printed in readable form) has affect on the output of this command.
      ots(str);
pc(lstr)
*lstr;
             Page_ch = *lstr ;
pl( num, str, offset )
char *str:
             /* .pl [+-]N -- Set page length to N
             setnum ( &PGLEN, num, offset);
po( num, str, offset )
char *str;
             /* .po [+-]N -- Set page offset to N
                                                            (continued on page 90)
```





NOW INTRODUCING VIRTUAL MEMORY SUPPORT

BetterBASIC with the optional Virtual Memory Manager can now address 400,000,000,000 bytes of memory!

BetterBASIC Application Development System \$199.00 The BetterBASIC Application Development System provides very close compatibility with PC-BASICA and GW-BASIC, yet provides numerous new and sophisticated language features such as: program Block Structures, recursive Procedures and Functions with local variables, structures, Records and Pointers and last but not least support of large memory.

Virtual Memory Manager \$99.00 The Virtual Memory Manager expands Better-BASIC's data space into the gigabyte range and finally breaks the 640k byte barrier for array sizes. Not only can you directly address all expanded memory supported by LIM/EMS memory boards, you can also address any RAM Disk, Hard Disk or even a Floppy Disk as if they were ordinary RAM.

C-Link This software package allows BetterBASIC to access C-language library functions from within BetterBASIC. Currently supported are Lattice and Microsoft C.

Screen Design System This package truly takes the drudgery out of creating display screens and data entry screens. An interactive Screen Editor lets you "paint" your display screens exactly as you want them to appear in your program. The completed screens take the form of disk resident images. A run time library module provides many new BetterBASIC procedures and functions for interacting with the display screens to simplify the use of pop-up menus and data entry screens.

Btrieve™ Interface This is a high level BetterBASIC interface

to the ever popular Btrieve™ file manager from SoftCraft. Instead of Assembly language calls this module provides high level BetterBASIC program access to all Btrieve™ functions. Use it to design your own database application in BetterBASIC.

8087/80287 Math Module

\$99.00 This module allows you to use the 8087 or 80287 co-processor to significantly accel-

erate programs which are floating point calculations intensive.

Decimal Math Module \$99.00 If you are a business programmer, you are probably frustrated by the many roundoff problems caused by ordinary IEEE format floating point numerical operations. The BetterBASIC Decimal Math Module which offers variable precision from 6 to 24 digits, drastically reduces roundoff problems in business applications.

> BetterTools™ \$99.00 This is a collection of more than 150 useful extensions to BetterBASIC such as time

and date computations, encryption and decryption, low level file directory access, hyperbolic function and much more. No BetterBASIC programmer should be without BetterTools™

> Virtual Memory Manager-**Network Version**

\$250.00

\$99.00

This version of the Virtual Memory Manager allows Virtual Memory to be distributed throughout a Local Area Network. It also provides File, Records and Field Locking to control access to shared data.

Call our Toll Free Order Line 1-800-255-5800



Summit Software Technology, Inc.™

106 Access Road, Norwood, MA 02062 CIRCLE 363 ON READER SERVICE CARD

THE PROGRAMMER'S SHOP

helps save time, money and cut frustrations. Compare, evaluate, and find products.

RECENT DISCOVERY

Personal COBOL by Microfocus Develop, test, debug, executive
ANSI 74 code. Full-screen editor,
syntax checker, Animator, forms/
screen generator, help. Compatible
with Level II. PC \$ 169

Al-Expert System Dev't

CHARLES AND ADDRESS OF THE PERSON NAMED IN COLUMN 1		
Arity Combination Package	PS	\$1119
System - use with C	MS	\$ 259
SQL Dev't Package	MS	\$ 259
Auto-Intelligence	PC	\$ 749
Experteach - Powerful, samples	PC	\$ 349
Exsys	PC	\$ 309
Runtime System	PC	\$ 479
Insight 2+		\$ 379
Intelligence/Compiler	PC	\$ 749
Texas Instruments:		
PC Easy	PC	\$ 435
Personal Consultant Plus	PC	\$2589

Al-Lisp

Microsoft MuLisp 85	MS	\$	159
PC Scheme LISP - by TI	PC	\$	85
TransLISP - learn fast	MS		Call
TransLISP PLUS			
Optional Unlimited Runtime			Call
PLUS for MSDOS			Call
Others: IQ LISP (\$155), IQC LI	SP(S	26	59)

Al Prolog

APT - Active Prolog Tutor - buil	d		
applications interactively	PC		Call
ARITY Standard - full, 4 Meg			
Interpreter - debug, C, ASM	PC	\$	309
COMPILER/Interpreter-EXE	PC	\$	699
With Exp Sys, Screen - KIT	PC	\$1	119
Standard Prolog	MS	\$	79
MacProlog Complete M	IAC	\$	269
MicroProlog - Prof. Entry Lev.	MS	\$	85
MicroProlog Prof. Compiler/			
Interpreter	MS	\$	439
MPROLOG P550	PC	\$	175
Prolog-86 - Learn Fast	MS	\$	89
Prolog-86 Plus - Develop	MS		229
TURBO PROLOG by Borland	PC	\$	69

Basic

Basic Development System	PC \$	105
Basic Development Tools	PC \$	89
Basic Windows by Syscom	PC S	95
BetterBASIC	PC \$	129
8087 Math Support	PC \$	75
Run-time Module	PC \$	169
Exim Toolkit - full	PC §	39
Finally - by Komputerwerks	PC \$	85

FEATURES

formats, transmit data.

Turbo Expert by Thinking
Technologies - Menu driven expert
system generation package details
reasoning, comes with tutorial, manual
demos. Startup (400 rules) PC \$ 129
Corporate (4000 rules) PC \$ 359
VXM by Command Technologies
- Intelligent program control sharing
by different environments like
PCDOS-VAS. "Software Robots" use
resources as needed, convert

MS \$ 195

700 + Programmer's Products

The Programmer's Shop carries every programmer's software product for MSDOS, PCDOS, CPM, Macintosh, Atari, and Amiga systems. We help you choose the best tools for you. Most popular products are in stock, available for quick delivery. We will gladly special order a product for you at no charge — just allow a few extra days for delivery. Need Cross Compilers, Translators, or the right

Need Cross Compilers, Translators, or the rig Fortran compiler? Ask us. Our Services:

	Our	Servic	es:
· Programmer's Referral	List		Dealers Inquir
· Compare Products			Newsletter
· Help find a Publisher			Rush Order

Evaluation Literature FREE
 Over 700 products
 BBS - 7 PM to 7 AM 617-826-4086 National Accounts Center

Basic Cont.

Duoid Coilli		
QuickBASIC	PC	\$ 69
Turbo BASIC - by Borland	PC	\$ 69

Cobol

Microfocus Professional Cobol	PC	\$2295
VS Workbench	PC	\$3379
Microsoft COBOL	MS	\$ 439
Microsoft Cobol Tools	PC	\$ 209
Realia - very fast	MS	\$ 819
Ryan McFarland COBOL	MS	Call
COBOL-8X	MS	Call
Screenplay - screen mgmt.	PC	\$ 139

CLibraries-Communications

Asynch by Blaise	PC	\$ 135
Essential Comm Library	PC	\$ 135
With Debugger	PC	\$ 195
Greenleaf Comm Library	PC	\$ 129
Multi-Comm - add multitasking	PC	\$ 149

dBASE Language

Clipper compiler	PC	Call
dBASE II	MS	\$ 329
dBase III Plus	PC	\$ 429
dBASE III LanPack	PC	\$ 649
dBXL Interpreter	PC	\$ 139
FoxBase + - single user	MS	\$ 349
QuickSilver by Word Tech	PC	\$ 499

dBASE Support

dBase Tools for C	PC	\$ 65
dBrief with Brief	PC	Call
DBC ISAM by Lattice	MS	\$ 179
dBx Translator to C	MS	\$ 319
dFlow - flowchart, xref	MS	Call
Documentor - dFlow superset		
Genifer by Bytel-code generator	MS	\$ 299
QuickCode III Plus	MS	\$ 249

Editors for Programming

-antoro to i i rogitali ili	.9	
BRIEF Programmer's Editor	PC	Call
EMACS by UniPress Source:	\$929	\$ 299
Epsilon - like EMACS, full		
C-like language for macros.	PC	\$ 155
KEDIT - like XEDIT	PC	\$ 99
Micro Focus Micro/SPF	PC	\$ 139
PC/EDT - macros	PC	\$ 229
PC/VI - by Custom Software	MS	\$ 109
Personal REXX	PC	\$ 99
PMATE - power, multitask	PC	\$ 119
SPF/PC - fast, virtual memory	PC	\$ 139
Vedit		\$ 107
Vedit PLUS	MS	\$ 139

RECENT DISCOVERY

Turbo C by Borland. ANSI Compiler supports 6 models including tiny and huge has floating point, interactive editor, Make. Speed development. PC \$ 75

C Language-Compilers

AZTEC C86 - Commercial	PC	\$499
C86 PLUS - by CI	MS	Call
Datalight C - fast compile, good	code,	
4 models, Lattice compatible,		
Lib source. Dev'rs Kit	PC	\$ 77
Datalight Optimum - C	MS	\$ 99
with Light Tools by Blaise	PC	\$168
Lattice C - from Lattice	MS	\$275
Mark Williams - w/debugger	MS	\$369
Let's C Combo Pack	PC	\$ 99
Let's C	PC	\$ 59
Microsoft C 4.0- Codeview	MS	\$275
Rex - C/86 by Systems &		
Software - standalone Rom	MS	\$695
Uniware 68000/10/20 Cross		
Compiler by SDS	MS	Call
Wizard C	MS	\$299
Rom Development Package	MS	\$259

C Language-Interpreters

C-terp by Gimpel - full K & R	MS	\$229
C Trainer - by Catalytix	PC	\$ 89
INSTANT C - Source debug,		
Edit to Run-3 seconds, .OBJs	MS	\$379
Interactive C by IMPACC Assoc.	PC	\$209
Run/C Professional	MS	\$159
Run/C Lite	MS	\$ 89

C Libraries-General

O Elistation distribution		
Blackstar C Function Library	PC	\$ 79
C Essentials - 200 functions	PC	\$ 75
C Function Library	MS	\$109
C Tools Plus (1 & 2) - Blaise	PC	\$125
C Utilities by Essential	PC	\$135
C Worthy Library - Complete, m	nachin	e
independent	MS	\$249
Entelekon C Function Library	PC	\$119
Entelekon Superfonts for C		\$ 45
Greenleaf Functions-portable,	ASM	\$139
LIGHT TOOLS by Blaise	PC	\$ 69

C Libraries-Files

FILES: C Index by Trio - full B +		
Tree, vary length field, multi con	npiler	
/File is object only		\$ 89
/Plus is full source	MS	\$319
CBTREE - Source, no royalties	MS	\$ 99
CTree by Faircom - no royalties	MS	\$319
rtree - report generation		\$249
dbQUERY - ad Loc, SQL - based	MS	\$159
dbVISTA - full indexing, plus op	tiona	1
record types, pointers, Network		
Object only - MS C, LAT,	C86	\$145
Source - Single user	MS	\$399

Object only - MS C, LAT, C86 \$145 Source - Single user MS \$399 Source - Multiuser MS \$799 dBx - translator MS \$315 w/source to library MS \$349

FEATURE

FOXBASE + by Fox Software dBASE III + compiler runs faster, keeps interactivity with EDIT, BROWSE. Multiuser available. MS \$349

We support MSDOS (not just compatibles), PCDOS, Xenix-86, CPM-80, Macintosh, Atari ST, and Amiga.

provides complete information, advice, guarantees and every product for Microcomputer Programming.

Favorite Phoenix Tools

Phoenix provides productivity for every programmer. From object oriented C tools to an overlay linker, plus a debugger, a powerful, fast assembler, and a high-performance editor — Phoenix has it all. Call one of our specialists TODAY.

Order before May 31, 1987 and mention this ad for these SPECIAL PRICES:

	List	Normal	SPECIAL
Pasm Assembler-improved	\$195	S115	\$105
Pfix + Debugger	5395	S229	\$209
Pforce Library	\$395	\$229	\$209
Pforce + + Library	\$395	\$279	\$209
Plink 86 PLUS	\$495	\$319	\$279
Pmate Editor	\$195	S115	\$105

C Support-Systems

Advantage C + + - object		
oriented	PC	Call
Basic-C Library by C Source	PC	\$139
C Sharp - realtime, tasks.	PC	\$600
C ToolSet - DIFF, xref, source	MS	\$ 95
The HAMMER by OES Systems	PC	\$139
Lattice Text Utilities	MS	\$ 89
Multi-C - multitasking	PC	\$149
PC LINT-Checker. Amiga \$89	MS	\$ 99
Quickshell - script compiler	PC	\$349
Pfantasy Pac - by Phoenix	PC	\$849
Pre-C - Lint-Like	MS	\$155
Programmer's Extender, Vol. 1 N	1AC	\$ 79
Sapiens V8 - 8M workspace	PC	\$269
SECURITY LIB-add encrypt to M	AS C	,
C86 programs. Source \$229	PC	\$115
Time Slicer - R/T	PC.	\$265

C-Screens, Windows, Gr	aph	ics
C Power Windows by Entelekon	PC	\$109
dBASE Graphics for C	PC	\$ 69
C-Scape - capture Dan Bricklin	PC	\$179
Curses by Lattice		\$ 89
ESSENTIAL GRAPHICS - fast	PC	\$195
GraphiC - mono version		\$209
GraphiC - new color version	_	\$285
Greenleaf Data Window		\$159
w/source		\$319
Multi-Windows - use w/ Multi-C		\$295
Screen Ace Form Master	_	\$195
Vitamin C - screen I/O	_	\$199
Windows for C - fast	PC	\$149
Windows for Data - validation	-	\$239
View Manager - by Blaise		\$189
ZView - screen generator	MS	\$175

Debuggers

386 Debug - by Phar Lap	PC \$129
Breakout - by Essential	PC \$ 89
CODESMITH - visual	PC \$ 99
C SPRITE - data structures	PC \$129
DSD87 - by Soft Advances	PC \$ 79
Periscope I - List: \$345	PC Call
Periscope II - List: \$175	PC Call
Periscope II-X - List: \$145	PC Call
Pfix-86 Plus - by Phoenix	PC \$229
Showcase - test software	PC \$135
SoftProbe II - by Systems & Sof	tware,
embedded systems	PC \$695

Fortran & Supporting

50:More FORTRAN	PC	\$ 99
ACS Time Series	MS	\$399
Forlib + by Alpha	MS	\$ 59
MACFortran by Microsoft	MAC	\$229
MS Fortran - 4.0, full 77	MS	\$299
No Limit - Fortran Scientific	PC	\$115
PC-Fortran Tools - xref, pprint,	PC	\$179
RM/Fortran		Call
Scientific Subroutines - Matrix	MS	\$139

Multilanguage Support

THE RESERVE THE PARTY OF THE PA		
BTRIEVE ISAM	MS	\$199
BTRIEVE/N-multiuser	MS	\$465
Corporate PVCS-source control	MS	\$359
Flash-Up Windows	PC	\$ 79
GSS Graphics Dev't Toolkit	PC	\$375
HALO Graphics	PC	\$209
Dev't Package	MS	\$395
Informix - by RDS	PC	\$639
Informix 4GL-application builder	PC	\$789
Informix SQL - ANSI standard	PC	\$639
Opt Tech Sort - sort, merge	MS	\$115
PANEL -	MS	\$215
Pfinish - by Phoenix	MS	\$229
PolyLibrarian by Polytron	MS	\$ 79
PolyBoost - speed I/O, keyboard	PC	\$ 69
QMake by Quilt Co.	MS	\$ 85
Report Option	MS	\$119
Screen Sculptor	PC	\$ 95
SRMS - source control	MS	\$109
Synergy - create user interfaces		\$375
Xtrieve - organize database	MS	\$199
ZAP Communications - VT 100	PC	\$ 89

Pascal and Supporting

ALICE - learn Pascal	PC \$	59
Exec - Chain Programs	MS \$	79
MetaWINDOWS-graphics too	lkit	
bit-mapped, fast	PC \$	
MetaWINDOWS PLUS	PC \$	185
Microsoft PASCAL - faster	MS \$	189
Pascal Extender	MAC \$	65
Pascal Pac with Tidy - formatte	r,	
utilities	PC \$	69
Pascal Tools PLUS	PC \$	125
Pascal 2 - by Oregon Software,		
tight, fast	MS \$	329
TurboHALO - 150 routines	PC \$	99

FEATURE

F2C by Solution Systems - Fortran 66 or 77 to C. No max program size \$3000. Pioneer. 1000 line max:

RECENT DISCOVERY

Star Sapphire by Sapien Software. Common LISP compiles/translates to C. Features 8M virtual memory workspace. lexical & dynamic scoping. C Library source, graphics. Flavors, unlimited MS \$459 multidimensional arrays.

Other Languages

APL*PLUS/PC	PC	\$ 429
CCS Mumps - Singleuser	PC	\$ 50
CCS Mumps - Multiuser	PC	\$ 369
MasterForth - Forth '83 MAC o	r PC	\$ 109
Microsoft MASM		98
Modula-2 - by Pecan	MS	\$ 79
Modula-2/86 by Logitech	PC	\$ 62
Pasm - by Phoenix	MS	\$ 115
PC Forth + - by Lab Micro	PC	\$ 199
SNOBOL4 + - great for strings	MS	\$ 80
UR/Forth	MS	\$ 279


Xeniy/Uniy

ACTURE OTHER		
Basic - by Microsoft	\$	239
C-Terp by Gimpel Software	\$	379
Cobol - by Microsoft	\$	639
Cobol Tools - by Microsoft	\$	319
Fortran or Pascal - by Microsoft	\$	439
MicroFocus Lev. II Compact COBO	L\$	795
Panel	\$	539
RM/Cobol		Call
RM/Fortran		Call
Xenix Complete System	\$	1049

Other Products		
386 Assembler/Linker	PC	\$ 389
ASMLIB - 170 + routines	PC	\$ 129
asmTREE - B + tree file mgmt.	PC	\$ 339
Compact Source Print	PC	\$ 59
Dan Bricklin's Demo Program	PC	\$
Help/Control - on line help	PC	\$ 99
Interactive Easyflow-HavenTree	PC	129
Link & Locate - tools to work wi	th	
Intel and Tektronix projects.	MS	\$ 329
LMK - like UNIX make	MS	\$ 139
Microsoft Windows	PC	\$ 69
Software Development Kit	PC	\$ 329
MKS Toolkit - Unix, vi, awk	PC	\$ 119
Norton Commander	PC	\$ 55
Numerical Analyst by Magus	PC	\$ 269
PDisk - cache, tree	PC	\$ 125
PLink - 86 PLUS - overlays	MS	\$ 319
PMaker - by Phoenix	PC	\$ 79
Polymake by Polytron	MS	\$ 129
PolyShell by Polytron	MS	\$ 119
PolyXREF by Polytron	PC	\$ 99
Sapiens V8 - 8M virtual mgr.	PC	\$ 300
Taskview - by Sunny Hill		
Software, ten tasks	PC	\$ 55
Tom Rettig's Library - dBASE	PC	\$ 89
Tree Diagrammer	PC	\$ 59
Visible Computer: 8088	PC	\$ 65
1		

Note: Mention this ad. Some prices are specials. Ask about COD and POs. Formats: 3" laptop now available, plus 200 others. UPS surface shipping add \$3 item. All prices subject to change without

Call for a catalog, literature, advice and service you can trust



800-421-8006

THE PROGRAMMER'S SHOP TM Your camplete source for software, services and answers

5-D Pond Park Road, Hingham, MA 02043

Mass: 800-442-8070 or 617-740-2510 3/87 CIRCLE 141 ON READER SERVICE CARD "I would like to mention that I appreciate the way that The Programmer's Shop does business. It is indeed refreshing to be able to call and get answers that you can trust in, to questions on various products.

Donald E. Winters MIS Software Development Inc.

MO MIS

386-386-386-386-386-386-386-

386

C and Pascal

MetaWare Incorporated announces the first available C and Pascal compilers that generate

protected-mode 80386 code

for running on any 80386 machine that runs MS-DOS (e.g., the Compaq Deskpro 386). The compilers are functionally identical to the well-respected 8086/286 MS-DOS High C™ and Professional Pascal™ compilers that have received outstanding reviews in such magazines as Computer Language, Dr. Dobb's, and PC Tech Journal. Our compilers are currently used by industry leaders such as Ashton-Tate, AutoDesk, ANSA, and Lifetree. Now you can get them generating 80386 code.

If you have an application that requires the large 32-bit address space and the full 32-bit registers of the 80386, expand your marketplace to the rapidly growing supply of 80386 MS-DOS machines. Contact MetaWare for your 80386 software solution today! (408) 429-6382, telex 493-0879.

Durable Software Constructed Automatically "

Meta



Ware

INCORPORATED

903 Pacific Avenue, Suite 201 • Santa Cruz, CA 95060-4429

Publication Quality Scientific Graphics


Over 100 C routines make scientific plotting easy

- → linear, log, & polar plots
- → bar charts & Smith charts
- -> contour plots with labels
- → 3-D curves, 3-D surfaces
- → 4 curve types, 8 markers, errorbars
- → 14 fonts, font editor
- → unlimited levels of superscripts
- → 4096 x 3120 resolution in 16 colors on EGA, Tecmar, Sigma boards
- -> zoom, pan, window and merge plots
- → high resolution printer dumps


SOURCE INCLUDED for personal use only

\$350. Demo \$8

256k, IBM, AT&T, Corona PCs, DOS 2.xx, 3.xx Most boards, printers, and plotters supported Microsoft, Lattice, DeSmet, Aztec, C86 compilers







Scientific Endeavors Corporation

Route 4, Box 79 Kingston, TN 37763 (615) 376-4146

CIRCLE 210 ON READER SERVICE CARD


C CHEST

```
setnum( &OFFSET, num, offset);
            pr_traps();
                                   /* Print all the traps */
            /* .rd prompt
             Read insertion from standard input until two
newlines in a row are encountered. .rd creates
a macro called " ". It fills the macro from
standard input, expands the macro, and then
deletes the macro. lstr is a prompt which will
be printed to stderr. A BEL is output as a
prompt whether or not lstr is specified.
*/
            FILE
                       *oifile:
             fprintf(stderr, "\007");
                        fprintf(stderr, "\n%s", lstr);
            oifile = Ifile;
Ifile = stdin;
mcreate("", "\n");
Ifile = oifile;
            expand macro("");
munlink("");
rm(lstr) *lstr;
            /* .rm name
                              Remove the named macro or string.


if the macro is on the disk, the
fill will be deleted.
            if( *lstr )
    munlink( lstr );
                        err("Missing macro name\n");
rr(lstr, rstr)
char *lstr, *rstr;
            /* .rr xx
                      xx Remove number register xx. Non-
existant number registers evaluate
to zero when used in an expression.
            register int
            if( *lstr )
                       rm nreg(lstr) ;
                        err("Missing number register name\n");
rs(str)
*str;
            /* .rs -- Restore line spacing turned off with
a previous .ns command. Note that
bp N (the N is required) also works,
                              as does printing some text.
            Nospace = 0 ;
so(lstr)
           register FILE *fd;
           process( fd, lstr, 0, 0 );
                                                      (continued on page 92)
```

Announcing Magic PC – the first breakthrough for database applications developers in over 20 years:

Now you can develop professional applications 1000% faster than your 4GL or DBMS, totally free from programming, commands and syntax!

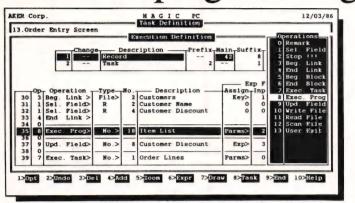

A Magic PC program looks as simple as this. To design an application you quickly fill-in menu-driven decision tables without having to write a single line of code. For example, just by highlighting the Execute Program operation on this screen and also highlighting the Item List program in the Program Menu, you tell Magic PC to pop-up the Item List window shown in the adjacent screen, when the end-user hits the Zoom key.

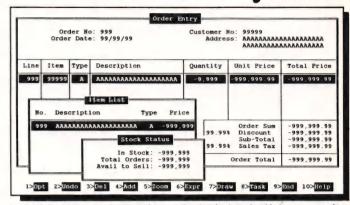

Magic PC gives your end-user the power to harness and retrieve data instantly, without any commands or syntax because at runtime you already have built-in options to Add, Delete, Modify, Query and get on-thespot ad-hoc information simply by highlighting selections from menus. Dats validation, security and error-checking are done automatically for you by Magic PC without programming

Who needs another DBMS?

At last, Magic PC gives you the ultimate applications design tool, far ahead of 4GL's, DBMS and Application Generators.

Magic PC breaks through the language barrier with the revolutionary Un-Language concept:

NO PROGRAMMING, COMMANDS OR SYNTAX!

Free yourself from your programming language

Magic PC makes you, the professional, completely free from the drudgery of procedural programming. No more cryptic commands, syntax or unforgiving procedural structures, because Magic PC does all the programming automatically. There's your competitive edge. The rest is up to you . . .

The Professional Choice

Already an international success, Magic PC is a profit maker and career booster for DP Consultants, System Integrators, VARs, MIS professionals, System Analysts, Programmer Analysts and Software Engineers. If you design PC applications professionally, you can't afford not to Un-Language now.

IBM France: "IBM encourages this introduction and can not help but salute such evolution . . .

Israeli Air Force: "We were convinced that it was not possible to have a design tool powerful enough to implement real-life applications without a programming language. Magic PC changed our mind.

Jeff Duntemann, PC Tech Journal: "It's probably the best integrated database applications and screen generator that I have ever seen . . . very smooth system, and smoothness comes at a premium these days . . "

The Magic PC Secret

You're so much more productive with Magic PC because there is absolutely no programming to slow you down. You design a Magic PC application by simply filling-in the Data Dictionary Tables (Files, Fields, Keys) and the Task Description Tables (Operations and Expressions).

Only 13 design Operations harness the power of Magic PC. Operations are specific enough to eliminate the need for tiresome syntax, yet elastic enough to produce robust custom applications. Use the Operations to describe what you want and Magic PC makes it happen. It's that simple.

Make Task nesting power available with a single Execute Task Operation. This powerful instruction triggers Magic PC to execute and display additional tasks or even external applications through Window Zooms. The 3-dimensional effect of Window Zooming lets you probe deep into your application through nested windows and manipulate the data underneath.

You describe a Magic PC Task or Program (composite Tasks) by filling your system analysis flow into the Task Description Tables. Choose the participating Data View, and Magic PC executes your desired Operations. You interface with the Tables by highlighting your selections from pop-up menu-driven windows. There's nothing to edit except your headings.

You're not confined to any particular design sequence as you are with most procedural languages. You can enter and change any Table spontaneously, on the fly, as ideas come to mind and Magic PC automatically maintains the application integrity.

A Magic Inference Engine automatically orchestrates your Task Description Tables into a single file of internal Knowledge Base Rules for optimum, bug-free performance. Knowledge Base Rules are executed by the Magic Run engine for stand-alone runtime operation, or by the Magic Lan engine for unrestricted Novell network sharing. You're free to design the Knowledge Base without worrying about the internal structure.

Discover fast, language-free programming at no risk for only



CIRCLE 369 ON READER SERVICE CARD

See for yourself how fast you can program languagefree applications with our low-cost limited offer.

You'll get the full Magic PC software unprotected and limited to 100 records and 450 page documentation complete with a free Order Entry sample application. You'll also get our free telephone support for 90 days!

And your \$19.95 will be credited towards the full \$695 Magic PC purchase price. Even if you don't buy Magic PC right away, keep your \$19.95 Magic PC Trial as your application prototyping tool at this bargain price.

Our No-Risk Guarantee!

You have our no-risk 30-day money-back guarantee: if you're not completely satisfied for any reason, even Magic PC Trial for \$19.95, send it back for a refund.

Order now while supply lasts

Call this toll free number now with your Visa, MasterCard or American Express for immediate delivery, or send the Order Coupon below today to Aker.

1-800-345-MAGIC in CA call 714-250-1718

Yes, please rush me: Magic PC Trial	\$ 19.95
☐ Magic PC	\$695.00
Add shipping	\$ 5.00
In CA 6% tax	\$
Prices valid in US only.	Total \$
Ship to:	
Address:	



Aker Corp. 18007 Skypark Circle B2, Irvine, CA 92714 (714) 250-1718, Elec. Mail Dialcom 41: AKR 001 Telex 4931184 OEM and VAR inquiries are welcome.

Min. requirements PC DOS 2.0. IBM PC or 100% compatible with 512K and hard disk ©1986 Aker Corp. Printed 1/87 Trademarks: Magic PC, Un-Language, Window Zoom, Magic Run, Magic LAN and Magic PC Trial are trademarks of Aker Corp., IBM PC and PC-DOS are trademarks of IBM Corp., Novell is a trademark of Novell Inc.

Fortran Support

for

IBM PC/XT/AT & Compatibles

Versions Available For:

Microsoft, Supersoft, RyanMcFarland, IBM Professional, Lahey, & IBM Fortran.

Forlib-Plus \$69.95

Supports graphics, interrupt driven communication, program chaining, and file handling/ disk support. A Fortran coded subroutine is included which will plot data on the screen either in linear/linear, log/linear, linear/log, or log/log on the appropriate grid.

Strings & Things \$69.95

Supports string maipulations, command line usage, DOS call capabilities, SHELL generation and data transmission, BATCH file control, music generation, PEEKS and POKES, PORT access, and general register manipulations.

For-Winds \$89.95

Gives the Fortran programmer the capability of generating up to 255 windows on the screen. Each window can be individually scrolled, moved, sized, generated, and removed. Both color and monochrome type displays are supported. Full source code is supplied for customization.

ACS Time Series \$495.00

This is a COMPLETE time series analysis package which contains VERY HIGH SPEED FFTs, Filter generations, convolutions, transfer function calculations, auto and cross spectra calculations, Cepstrum, curve fitting algorithims, coherence calculations, and many other associated routines. The price includes FULL source code.

Fortran Scientific Subroutine Package \$295.00

There are approximately 100 Fortran subroutines included which fall under the following 12 categories:

1) Matrix storage and Operations 2) Correlation and Regression, 3) Design Analysis (ANOVA), 4) Descriminant Analysis, 5) Factor Analysis, 6) Eigen Analysis, 7) Time Series, 8) Nonparametric Statistics, 9) Distribution Functions, 10) Linear Analysis, 11) Polynomial Solutions, 12) Data Screening. Full source code is included.



ALPHA COMPUTER SERVICE 5300 ORANGE AVENUE SUITE 108 CYPRESS, CALIFORNIA 90630 (714) 828- 0286

California Residents Include 6% Sales Tax

There are NO license fees

CIRCLE 321 ON READER SERVICE CARD

C CHEST

```
fclose( fd );
sp( num, str, offset, dobreak)
char *str;
            .sp [N] -- Space down N lines. Default N is 1
       if ( dobreak )
       if ( num > 0 )
              prblank ( num );
       else if (num < 0 )
              go_up( num );
ss(num)
               /* .ss N -- Change the width of a space in the currently active font to N. Default
                                   N is 1.
              Fonts[ CURFONT ].widths[ ' ' ] = num;
ta(str)
*str;
              /* .ta [A,B,...2] -- If no argument, clear all tab

* [+]B[RCL] stops. The argument is a list

* of tabstops. Each argument can be a specific

* column (eg. 9), or an offset from the previous

* number (eg. +8), in addition, each number can

* be followed by a tab type:

* R - Right justified in field

* C - Centered in field

* L - Left justified in field
              if( *str )
            tabset( str );
                             tabclr();
char
               /* .tc C -- MODIFIED NROFF COMMAND .
                * Set tab expansion character to C.

* if no C, tab expansion is disabled. This lets

* us get a ^I or ^A through to the printer control
                * tp.
                      Tabs_enabled = 0;
                      Tabs_enabled = 1;
Tab = *str;
ti( num, str, off, dobreak )
              if( dobreak )
     brk();
              Tempin = num ;
              /* .tl /A/B/C/ Print a 3-part title with A left
justified, B centered, and C right
justified. The / can be any character. The
title is printed at the current page offset
but indent is ignored, the length is defined
with the .lt command.
              title( str );
                                                                                                (continued on page 94)
```

D L KITHRAM MID

provides complete information, advice, guarantees and every product for Microcomputer Programming.

AUTO-INTELLIGENCE

The First Automatic Knowledge Acquisition System

List: \$990

Our: \$749

Intelligence Ware, Inc.

9800 S. Sepulveda Blvd. Suite 730 Los Angeles, CA 90045

Telephone: [213] 417-8896; Fax (213) 417-8897

WANT TO ADD

WINDOWS, ICONS, FONTS, FAST GRAPHICS, DIALOG BOXES, PROCESS MANAGEMENT, AND DEVICE INDEPENDENCE

TO YOUR IBM PC PROGRAMS?

If you have ever wished that you could develop stunning Macintosh-like programs on the IBM PC without the overhead of an enormous operating environment like Windows or GEM, then you need the SYNERGY DEVELOPMENT TOOLKIT, from Matrix Software.

Using a memory resident runtime module only 20K in size (versus as much as 300K for Windows), you can develop applications with: overlapped and tiled windows; pull-down menus with half intensity option and automatic sizing; fast graphics function calls to draw shapes, lines, boxes, and create intricate fill patterns in both regular and irregular areas; have full device independence (drivers for numerous devices, including CGA, EGA and Hercules are included); sophisticated text input and output, with fonts in different styles and sizes; full keyboard support (your programs won't need a mouse!) and powerful mouse support; and process management calls to efficiently manipulate system resources.

The Toolkit has gateways to support the following languages

Turbo Pascal

IBM/MS Pascal

Macro Assembler

- Basic
 dBASE II/III Compilers

In addition, the Toolkit includes a powerful collection of tools including a graphics resource editor for developing your own icons and fonts

NEW! The Toolkit also includes a free copy of Synergy Layout, a revolutionary software nt tool that dramatically increases your productivity by actually generating bug-free source code development tool that dramati in Macro, C, and Turbo Pascal

For further information, contact Matrix Software at [617] 567-0037.

List: \$395 Our: \$349

CIRCLE 302 ON READER SERVICE CARD

MUMPS .

Now quickly and easily develop multi-tasking applications on your PC!

Now get the speed, power and flexibility of MUMPS in a truly concurrent processing environment with COMP Computing Standard MUMPS (CCSM).

CCSM provides the programmer with these benefits:

- Save time and money by writing Applications in 1/3 to 1/5 the amount of code.
- Fast data access with B-Tree File Structure and Automatic disk caching.
- Unlimited program size and variable space with advanced virtual memory system.
 - 100% portable from micros to minis to mainframes.
- Easily write multi-tasking and multiuser applications.

And with MUMPS, all you need to do to start a background process is: "JOB ^ROUTINE". No memory allocation, no table set-up, no hassles; the system handles everything.

CCSM is also available in a multi-tasking version for the

Multi-Tasking:

List - \$149.95

Ours - \$129

Multiuser:

List - \$450.00 For a demonstration diskette of CCSM, send two dollars to the address below.

Ours - \$369


1601 Westheimer, Suite 201 1-800-257-8052

louston, Texas 77006

ON READER SERVICE CARD

In Texas: 1-713-529-2576

FIRMWARE DEVELOPMENT

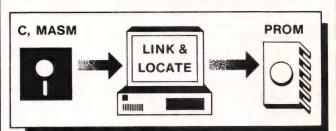

LINK & LOCATE enables PC users to produce ROM-based firmware for 8086/87/186 from object files generated by popular C compilers, such as from Wizard, Microsoft and Lattice, and MASM assembler from Microsoft. Provides full control of segment placement anywhere in memory. Supports output of Intel HEX file for PROM programmers, Intel OMF absolute object file for symbolic debuggers and in-circuit emulators. Includes Intel compatible linker, locator, librarian, hex formatters and cross reference generator. \$350.

SYSTEMS &

\$329 Our:

3303 Harbor Blvd., C11, Costa Mesa, CA 92626 Phone (714) 241-8650 FAX (714) 241-0377 TWX 910-695-0125

Call Today for FREE detailed information or try Risk-Free for 31 days.

THE PROGRAMMER'S SHOP

5-DPond Park Road, Hingham, MA 02043 Mass: 800-442-8070 or 617-740-2510 2/87

Don't use your PC

ET (EditingTools) new version 2.1

ET is 2-program in 1: a text editor and a DOS shell

You certainly don't need another editor Yet ET Editor can serve you better if the one you use now is a line, single file, or split-screen editor, or is too slow, big, and clumsy, or has no DOS shell, and limits file sizes to 64K or less.

ET Editor has all the features a good text editor should have, and yet it is small, and incredibly fast. You are not forced to master new editor command keys since all of them can be changed to whatever you prefer during editing.

\$35 + \$4 s/h; Demo \$5 Optimized Turbo Pascal source code is available for \$99 more.

Optimize your Turbo Pascal programs with (InlineTools 2.0)

An inline assembly editor

Turbo Pascal Programmers No more DEBUG and MASM. Now you can rewrite using IT critical parts of your programs such as screen display, DOS calls in inline assembly code as comments. Ask IT to append the machine code for you via the touch of a button.

Don't know assembly Start your first lesson with IT, and apply it right away. You won't believe how easy it is to replace for instance DOS calls in your programs with real assembly.

IT manual also shows you in detail how each Turbo Pascal construct is compiled, and ways to optimize your programs.

\$65 + \$4 s/h; Demo \$5

Both ET and IT run efficiently on IBM and true compatibles.

Not copy protected.

Satisfaction is guaranteed.

Jou Laboratories
P.O. Box 460969
Garland, TX 75046
(214) 495-8862

CIRCLE 355 ON READER SERVICE CARD

C CHEST

```
tm(lstr)
*lstr;
         /* .tm str -- Print string to standard error.
         fprintf(stderr, lstr);
tp()
         tabprint();
ul ( num, str, offset)
char *str;
         num, offset;
int
          /* .ul [N]
                            -- Underline the next N input lines, if N is absent. Only alphanumeric characters are underlined, punction,
                             spaces, etc., will not be.
         setnum( &Num under, num, offset );
 vd( num, str, offset, dobreak, tail )
        *str;
*tail;
 char
          /* .vd <up str> N <down str> -- NOT NROFF COMMAND --
           * defines strings to send printer cursor up or * down by 1/N lines.
          static char dnstr[81];
          static char upstr[81];
         strncpy( Up_str = upstr, str , 80 );
strncpy( Dn_str = dnstr, tail, 80 );
 wa ( num )
     /* .wa [N] -- NOT AN NROFF COMMAND --
      * Waits for about N seconds (at most N + 1).
       * If N == 0 or if no argument a prompt is printed and the program waits for you to type Enter.
     int sec, osec, garbage;
          fprintf(stderr, "\n\007\nType CR to continue...");
fprintf(stderr, "%c\n", getch());
              fprintf( stderr, "\n");
              while (--num >= 0)
                   fprintf( stderr, "waiting: %02d\r", num );
                   time(&garbage, &garbage, &osec, &garbage);
                   do {
   time(&garbage, &garbage, &sec, &garbage);
                   } while ( osec == sec ):
              fprintf( stderr, "\n"):
wh( num, str )
char *str;
         /* .wh N X -- Set output line trap. The macro X
```

* exec * proc * To c * The * expl	ute ess han exc ici	d when ing. (ge a c eption tly wh	n input Only command n is .{ nen a \	has been ntrol-flo name you because { is encor	w o ne th: unt	nhil com eed is	man on com	ed ds ly mar	ommand won't by if/else are uninhib modify the id is genera (}}	ited. table. ted
CTAB {	Cm	dtab[] =							
/*		name		rout.,	t	p,	inh	ib,	default	*/
	-	"ad"	_	ad	,	0,	1	,	14 49	},
	1	"af"	*	af	,	3,	1	,	41 11	},
	1	"am"	,	am	,	3,	1	,	11 11	},
	1	"as"		as	΄,	3,	1	,	66.66	},
	1	"bd"	,	bd	΄.	3,	1		11 11	1.
		"bo"	1	bo		1,	1	,	01 7 10	j.,
	1		,		,		1	,	1111	
	1	"bp"	,	bp		1,		,	****	},
	1	"br"	1	br	,	0,	1	,	H 5 H	},
	1	"c2"	,	c2	-	0,	1	,	11 11	},
	1	"CC"	,	CC		0,	1			},
	{	"ce"	,	ce	,	1,	1	,	1111	},
	{	"cf"	,	cf	,	0,	1			},
	{	"ch"	,	ch	,	2,	1	,	11011	},
	{	"cm"	,	cm	,	0,	1	,	****	},
	{	"CU"	,	cu	,	1,	1	,	"1"	},
	1	"da"	,	da	,	0,	1	,	tttt	},
	1	"db"	,	db	,	0,	1	,	41.61	},
	1	"de"	,	de		3,	1	,	88.00	1,
	1	"df"		df	,	3,	1	,	44.40	},
	1	"di"	,	di	,	0,	1		60.00	},
	1	"ds"	,	ds	,	3,	1	,	00 00),
	1	"dt"	,	dt		1,	1			1,
	1	"ec"	,	ec		0,	1	,	11//11	1,
	1				,	0,	0	-	****	},
	1	"el"		el	,				11 11	1
	1	"em"	,	em	,	3,	1		1111	
	{	"eo"	,	eo		0,	1	,	***	},
	{	"ev"	,	ev	,	0,	1	-	00	},
	{	"ex"	,	ex	,	0,	1	,		},
	{	"fi"	,	fi	,	0,	1	,		},
	{	"ft"	,	ft	,	0,	1		"R"),
	{	"hd"	,	hd	,	2,	1	,	1111	},
	{	"hy"	,	hy	,	1,	1	,	"1"	},
	{	"id"	,	id	,	3,	1	,	00 40	},
	{	"ie"	,	ie	,	3,	0	,	1111	},
	{	"if"	,	iff	,		0	,	1111	},
	1	"iq"	,	ig		0,	1		01.00	},
				in	,	1,	1	100	410 44	

ould you like copy protection and customer satisfaction?



here's a better way to protect your software. It's called the Secom Key, and it works.

- The Key is completely transparent to the end user.
- end user.

 ☐ Won't interfere with peripheral operations.
- Doesn't occupy the disk drive.
- ☐ The Key allows <u>unlimited backup copies.</u>
- Makes site licensing easy and auditable.
- ☐ Easily installed. Uses only 1000 bytes.
- Over 60,000 have been sold worldwide.
- ☐ Same size as RS-232 plug.
- Available in quantities for as low as \$19.95.



or more information, contact Secom Information Products Co.



500 Franklin Square 1829 East Franklin Street Chapel Hill, NC 27707

(continued on page 97)

The Secom Key... for <u>real</u> software protection.



Secom Information Products Company

Call Toll-free 1-800-843-0413

We've Got The Missing Link: DDJ Back Issues

#88 Volume IX, Issue 2:

Telecommunications Issue: Micro To Mainframe Connection—
Communications Protocols—Unix to Unix Network Utilities—
VPC: A Virtual Personal Computer for Networks—PABX an the
Personal Computer—BASIC Language Telecommunications Programming—U.S. Robotics S-100 Card Modem.

#89 Volume IX. Issue 3:

RSA: A Public Key Cryptography System, Part I—Introduction to PL/C: Programming Language for Compilers—Program Design Using Pseudocode—More on Binary Magic Numbers—How fast is CP/M Plus?—CP/M 2.2 BIOS Function SELDSK—The results of the Floating-Point benchmark.

#90 Volume IX, Issue 4:

Optimizing Strings in C—Expert Systems and the Weather—RSA: A Public Key Cryptography System, Part II—Several items on CP/M Plus, CP/M 2.2 Compatibility—BDOS Function 10: Vastly improved—More on MS-DOS EXEC Function—Low-Level Input-Output in C.

#91 Volume IX, Issue 5:

Introduction to Modula-2 for Pascal Programmers—Converting Fig-Forth to Forth-83—Sixth Generation Computers—A New Library for Small-C—Solutions to Quirks in dBASE II.

#92 Volume IX, Issue 6:

CP/M on the Commodore 64—dBASE II Programming Techniques—First Chinese Forth: A Double-Headed Approach—cc-A Driver for a Small-C Programming System—A New Library for Small-C (Part III)—Comments on Sixth Generation Computers—Review of Turbo Pascal.

#95 Volume IX, Issue 9:

Forth Special Issue—File Maintenance in Forth—Forth and the fast Fourier Transform—Computing with Streams—A Forth Native-Code Cross Compiler for the MC68000—The FYG Standard Floating-Point Extension—CP/M Plus Interbank Memory Moves Without DMA—Ways to make C more powerful and flexible.

#96 Volume IX, Issue 10:

More dBASE II Programming Techniques—Simple Calculations with Complex Numbers—GREP.C: A Unix-like Generalized Regular Expression Parser—An optimization scheme for compilers, MSDOS 2.0 Filters, Sizing RAM under MSDOS, Two programming systems illustrating Runge-Kutta intergration.

#97 Volume IX, Issue 11:

Adding Primitive I/O Functions to MuLISP—Program Monitor Package: Using Interrupts to Instrument Applications—CP/M 2.2 Goes PUBlic—A Guide to Resources for the C Programmer—

#104 Volume X, Issue 6:

Information Age Issues—Modems: 2400 Bit/Sec and Beyond—C UART Controller—Christensen Protocols in C.

#108 Volume X, Issue 10:

Special Forth Issue—A Threaded-Code Microprocessor Bursts Forth—Design a Forth Target Compiler.

#109 Volume X, Issue 11:

Modula-2 vs. Pascal for Microcomputers: An Update—Bit Manipulation in Modula-2.

#113 Volume XI, Issue 3:

Parallel Processing—Concurrency and Turbo Pascal—What Makes DOS Fast—Minimizing Arbitrary Functions—MC68000 vs. NS32000.

#114 Volume XI, Issue 4:

Special Al Issue—Programming in LISP and Prolog—An Expert at Life—Perils of Protected Mode—I/O Redirection for the Shell.

#115 Volume XI, Issue 5:

Software Design from the Outside In—Dan Bricklin's DEMO Program—Cryptographer's Toolbox—EGA Graphics & Fast PC Graphics—How to Write Memory Resident Code.

#116 Volume XI, Issue 6:

Telecommunications Without Errors—General-Purpose Sorting—Structured Programming.

Other issues are also available. Please inquire.

#117 Volume XI, Issue 7:

Special FORTH Issue Forth Standards Proposal—Forth in a Bottle—Forth & Expanded Memory—Forth Structured Programming

#118 Volume XI, Issue 8

Special C Issue Benchmarking C Compilers—The Joy of Conciseness—Nearly Perfect Trees—Generics in Ada—Real-World Data Types.

#119 Volume XI, Issue 9

Smooth Algorithms—MS-DOS Directory Traversal—Turbo Boards Review— Radix Sort—Does Turbo Prolog Measure Up—Crawling Memory Test.

#120 Volume XI, Issue 10

80386 Programming—MS-DOS File Browsing—Converting to the 320xx—Modula-2 Compiler Review—Factoring in Forth.

#121 Volume XI, Issue 11

Graphics Routines—The New Graphics Chips— Programming Tips in C, Modula-2, Pascal, and Ada— 68K Graphics.

#122 Volume XI, Issue 12

Multitasking—32000 Assembler—Comparing String Comparisons—Turbo Pascal Procedural Parameters.

#123 Volume XII, Issue 1

Annual 68K Issue—68K Mini Forth OS-9 Operating System—Mac and Amiga Interface Programming.

#124 Volume XII, Issue 2

Editors and Assemblers

#125 Volume XII, Issue 3

Data Compression Techniques

TO ORDER:

Return this coupon with payment to Dr. Dobb's Journal, 501 Galveston Dr., Redwood City, CA 94063

Please send me the issuels circled: 73 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 95 96 97 104 108 109 110 113 114 115 116 117 118 119 120 121 122 123 124 125

Price: 1 issue—\$5.00.2-5 issues—\$4.50 each 6 or more—\$4.00 each. (There is a \$10.00 minimum for charge orders.)

I have read the postal instructions and understand that I will not receive my order unless I have sent the correct payment amount.

rieuse charge my:	Visa	☐ M/C	Amer. Exp.	
Card No.				
Signature			Exp. Date	

I enclose \$ (U.S. check or money order).	
Outside the U.S., add \$.50 per issue.	
Name	
Address	
City	

Outside U.S., add \$.50 per issue. Price includes shipment by second class or foreign surface mail. Within U.S., allow 9 weeks for delivery, For U.P.S. shipment, add \$1.00 for 1–2 issues and \$.50 per issue thereafter.—NO P.O. BOXES, Airmail rates: Canada—add \$1.75 per issue; other foreign add \$3.00 per issue.

Please provide a street address rather than a P.O. Box.

C CHEST

Listing Twenty-six (Listing continued)

```
1175"
                                                          ..80..
umfu
"ml"
                         na
"nb"
"ne"
"nf"
                         nb
                         nf
                         nh
nm
"nh"
"nm"
                                                          ****
nr
                         nr
"ns"
                                                          ....
"os"
                         os
"ou"
"pc"
"pl"
"po"
"pt"
"rd"
                         ou
pc
pl
po
pt
rd
                                                          11 9, 11
                                                          110 00
                                                          11\007
"rm"
                                                          ****
ursu
"so"
                         so
sp
                                                           1113.11
"ta"
"tc"
"ti"
                         ti
tl
tm
"tl"
                                                           "\007"
"tp"
"ul"
"vd"
                         tp
ul
vd
                                            0.
                                                           "1"
                                            1, 1, 1, 0,
Hwall
                          wa
"wh"
"WS"
                          sblock
                          eblock
```

);
int Ctabsize = (sizeof(Cmdtab) / sizeof(*Cmdtab));

End Listing Twenty-six

Listing One

```
21
            STAT.C
                        Statistics routines:
31
       newsample( n ) Add a new sample to the mean/average
 41
 51
                       totals.
        running_mean() Returns the running mean of the samples.
 61
                       Returns the true mean of the samples.
        true mean ()
                       Returns the standard deviation from the
        deviation()
 81
 91
                       running mean.
101
        reset mean (n)
                       Resets everyting to 0. 'n' is the boxcar
111
                       length that will be used for subsequent
                        samples. If n is 0, the default length of
121
131
                        4 is used.
141
151
   #define DEF_BOXLEN 4
161
171
    static unsigned long
                            Average
181
    static unsigned long
                             Numnums
191
                             Mean total = 0;
    static unsigned long
201
    static unsigned long
211
                                        = 0;
                            Dev_total = 0;
Dev = 0:
221
    static unsigned long
    static unsigned long
                             Dev
                                     = DEF_BOXLEN ;
    static unsigned int
                            Boxlen
261
271
281
    void
          newsample ( n )
291
           Add a new point into the various mean and deviation
301
           variables.
311
321
331
        register unsigned long dif;
34
35
361
        Average += n;
371
        Numnums++;
381
                                         /* find running mean */
391
        Mean total -= Mean ;
        Mean total += n;
401
        Mean = Mean total >> Boxlen;
411
                                                         (continued on next page)
```



SQL Compatible Query System adaptable to any operating environment.

CQL Query System. A subset of the Structured English Query Language (SEQUEL, or SQL) developed by IBM. Linked files, stored views, and nested queries result in a complete query capability. File system interaction isolated in an interface module. Extensive documentation guides user development of interfaces to other record oriented file handlers.

Portable Application Support System

Portable Windowing System. Hardware independent windowing system with borders, attributes, horizontal and vertical scrolling. User can construct interface file for any hardware. Interfaces provided for PC/XT/AT (screen memory interface and BIOS only interface), MS-DOS generic (using ANSI.SYS), Xenix (both with and without using the curses interface), and C-library (no attributes).

Screen I/O, Report, and Form Generation Systems. Field level interface between application programs, the Query System, and the file system. Complete input/output formatting and control, automatic scrolling on screens and automatic pagination on forms, process intervention points. Seven field types: 8-bit unsigned binary, 16 bit signed binary, 16 bit unsigned binary, 32 bit signed binary, monetary (based on 32 bit binary), string, and data.

Including Source Code

\$395.00

File System interfaces include C-tree and BTRIEVE.

HARDWARE AND FILE SYSTEM INDEPENDENT

Kurtzberg Gomputer Systems

41-19 BELL BLVD. Bayside, N.Y. 11361

VISA/Master Charge accepted [718] 229-4540


*C-tree is a trademark of FairCom

IBM, SEQUEL, PC, XT, AT are trademarks of IBM Corp. MS-DOS and Xenix are trademarks of Microsoft Corp.

CQL and the CQL Logo are trademarks of Kurtzberg Computer Systems.

CIRCLE 294 ON READER SERVICE CARD

COMBINE THE RAW POWER OF FORTH WITH THE CONVENIENCE OF CONVENTIONAL LANGUAGES



Now you can compile even large programs in the blink of an eye. If you don't need to compile the huge fast programs we handle so well, use the metacompiler to spin off compact ones — as small as a few hundred bytes for simple threaded utilities — as small as 2 kbytes for a full Forth execution core. HS/FORTH is the best base from which to spin off either direct or indirect threaded systems, small or large, or anything else you might invent. This is absolutely the most flexible Forth system available, at any price, with no expensive extras you'll need to buy later. Distribute metacompiled tools, or turnkeyed applications royalty free.

Although HS/FORTH is unmatched for language experimentation and development, remember that we wrote it to be a top notch application development system. Your appli-cation will have all of DOS at its disposal, commands, other programs, functions, everything! I/O is easier than in Pascal or Basic, but much more powerful — whether you need parsing, formatting, or random access. Send display output through DOS, BIOS, or direct to video memory. Windows organize both text and graphics display. Math facilities include both software and hardware floating point plus an 18 digit integer (finance) extension and fast arrays for all data types. The hardware floating point covers the full range of trig, hyper and transcendental math including complex. Forth gives you total control of your computer, but only HS/FORTH gives you imple-mented functionality so you aren't left hanging with "great possibilities" (and lots of work!)

We can't possibly cover everything in this ad, so please call or write and ask for our brochure. We'll also be happy to answer any questions.

HS/FORTH complete system:	\$395.
Forth: Text & Reference (500pg) Kelly&Spies, Prentice Hall	\$ 22.
HS/FORTH: Tutorial & Reference Kelly&Callahan (500pg)	\$ 59.
HS/FORTH Glossary	\$ 10.
DEMO DISK	\$ 10.



Visa

Mastercard Messecond



HARVARD SOFTWORKS

PO BOX 69 SPRINGBORO, OH 45066 (513) 748-0390

CIRCLE 132 ON READER SERVICE CARD


C CHEST


Listing One (Listing continued)

```
= abs( Mean - n ); /* Distance to point */
  441
                                               /* square it.
  451
  461
           Dev total -= Dev:
                                               /* find average
           Dev total += dif;
  471
                                               /* difference
  481
           Dev = Dev total >> Boxlen:
  491 1
  501
  511 /*.
  521
  53| int running_mean()
                                /* Return the current running mean */
  541 {
  551
               return Mean:
  561 }
  571
  581 /*-
  591
  60| int true mean()
                                 /* Return the current true mean */
  61 | {
  621
              return Average / Numnums:
  631 1
  641
  651 /*-
  661
  67| int deviation()
                              /* Return the current standard
  681 (
                              /* deviation from the running mean. */
  691
  701
               extern double sqrt();
  711
               return (int) sqrt ( (double) Dev );
  721 1
  731
  74 /*---
  751
  761
      void reset mean ( boxcar_val )
               /* Reset various global variables to their initial
* values, "boxcar_val" is used for the boxcar
  781
 791
  801
                * width. It is a shift value, not a true width. If
  811
                * it's 0, the default value of 4 is used instead.
                */
  821
  831
              Average
                          = 0;
  851
                          = 0;
               Numnums
  861
              Mean total = 0;
  871
               Mean
 881
              Dev total = 0;
 891
              Dev
                          = 0;
  901
                       = boxcar_val ? boxcar_val : DEF_BOXLEN ;
              Boxlen
  911 }
 95| #ifdef MAIN
 961
 971 #define NUMSAMPLES
                                50
 981
 991
     test ( how )
1001
1011
                  how = 0
                                    Straight line.
1021
                  how = 1
                                    Triangle
1031
                  how = 2
                                    Random
1051
         int
                  i, j, count, m, a, d, dir = 1;
107
1081
          for ( count = 0; count += dir; )
1091
1101
              if ( count == NUMSAMPLES )
1111
                      dir = -1
112
              newsample(i = ((how == 2) ? (rand() % NUMSAMPLES) : (how == 1) ? (count ) :
1131
1141
115
                                                (NUMSAMPLES / 2
                                                                      )));
1161
              m = running_mean();
1171
              d = deviation();
1181
              a = true mean();
1191
120
              for ( j = 1; j <= NUMSAMPLES; j++ )
1211
1221
                      if ( j>i && j>m && j>a )
1231
124|
125
                      if (j == i)
else if (j == m)
else if (j == a)
                                                 printf("*"):
1261
                                                 printf("m");
1271
                                                 printf("a");
1281
                                                 printf(" ");
1291
              }
```

```
1301
             printf("\n");
131|
1321 1
133
134
1351
1361 main()
1371 {
                 buf[801:
1381
         char
1391
         int.
                 how:
1401
1411
         reset mean ( 4 ):
1421
143
         printf("Straight line with length 16 boxcar\n\f");
          reset_mean(2);
145
         test(1);
test(1);
1461
1471
         printf("Triangle wave with length 4 boxcar\n\f");
1481
1491
150
          reset mean ( 4 );
1511
          test(1);
1521
          printf("Triangle wave with length 16 boxcar\n\f");
1531
154
1551
          reset mean ( 6 );
         test(1);
test(1);
1561
1571
          printf("Triangle wave with length 64 boxcar\n\f");
1581
1591
          reset mean (2);
1601
161|
          test ( 2 );
          printf("Random input with length 4 boxcar\n\f");
1621
163|
164
          reset_mean(4);
1651
          test (2);
          printf("Random input with length 16 boxcar\n\f");
166|
1671
          reset_mean(6);
1681
          test(2);
test(2);
1691
1701
          printf("Random input with length 64 boxcar\n\f");
1711
1721
 173| #ifdef NEVER
 1741
 1751
           while(1)
 176
               printf( "triangle, random, or linear (r/t/l)?" );
 1771
               gets ( buf );
 1781
 1791
               how = ( *buf == 'r' ) ? 2 : ( *buf == 't' ) ? 1 : 0;
 1801
 1811
               printf("Boxcar length? ");
 1821
               gets ( buf );
 1831
               test ( atoi (buf), how );
 1841
 1851
 1861
 187! #endif
 1881
 1891
                                                                       End Listing One
 190| #endif
```

(Softstrips are on page 101.)





TRANSFER DATA BETWEEN OVER 600 DIFFERENT COMPUTER SYSTEMS

WORD PROCESSORS TOO

QUICK TURN-AROUND PRICES FROM \$9 PER DISK

CALL OR WRITE FOR YOUR


FREE CATALOG

PORT-A-SOFT

555 S. STATE ST., SUITE #12 P.O. BOX 1685, OREM, UT 84057 (801) 226-6704

CIRCLE 229 ON READER SERVICE CARD

PC-DOS program lets your PC Read/Write/Format over 300 formats



\$79.95 + \$5.00 S/H Sales Tax if CA.

Upgrades available from previous versions Ask about FREE CP/M emulator! 🗘 To Order Contact:

XIEMOSTOF

1454 Sixth Street, Berkeley, CA 94710



VISA (415) 525-3113



CIRCLE 225 ON READER SERVICE CARD

Dr. Dobb's Journal

Subscription Problems? No Problem!



Give us a call and we'll straighten it out. Today.

Outside California CALL TOLL FREE: 800-321-3333

Inside California CALL: 619-485-6535 or 6536

MetaWINDOW

Power Graphics for your PC!

PC TECH JOURNAL

"Product of the Month"

... a technological tour de force for fast PC graphics."

NO ROYALTIES!

MetaWINDOW is the advanced high performance graphics toolkit which breaks the barrier between low-level graphic primitive libraries and pre-packaged window managers.

PC MAGAZINE

- .. the only way I know to do advanced graphics from Turbo Pascal."
- "... testing has found it fast and reliable."

Jeff Duntemann

"MetaWINDOW is written in hand optimized assembly code and is very fast. It is virtually bug free, and the manufacturer has been very responsive to questions. If you intend to do any graphics work at all, you must have this product."

PC TECH JOURNAL

- "... solves many problems that bedevil graphics sotware developers: non-standard hardware, high library cost, poor documentation, license fees, and confining license agreements. For proprietary graphics, this product may be the only choice."
- "... out-Borlands Borland's own Turbo Graphics Toolbox."
- "... one high-powered piece of artillery."

MetaWINDOW includes over 200+ graphic drawing and windowing functions and comes complete with language bindings for 15 popular C, Pascal and Fortran compilers, plus dynamic runtime support for over 40 graphics adaptors and input devices.

MetaWINDOW

Advanced Graphics Windowing Toolkit 4 disks, 3 260 page manuals - \$185

TurboWINDOW

All the features of MetaWINDOW just for Turbo Pascal -\$79.50

METAGRAPHICS

SOFTWARE CORPORATION

269 Mount Herman Road Scotts Valley, CA 95066 408/438-1550

CIRCLE 392 ON READER SERVICE CARD

Brand New From Peter Norton A PROGRAMMER'S EDITOR

that's lightning fast with the hot features programmers need

Direct from the man who gave you The Norton Utilities, Inside the IBM PC. and the Peter Norton Programmer's Guide.

"This is the programmer's editor that I wished I'd had when I wrote my Norton Utilities. You can program your way to glory with The Norton

Peter Nortan



Easily customized, and saved Split-screen editing A wonderful condensed/outline display Great for assembler, Pascal and C

Peter Norton Computing, Inc., 2210 Wilshire Boulevard. Santa Monica, CA 90403, 213-453-2361. Visa, Mastercard and phone orders welcome.

CIRCLE 243 ON READER SERVICE CARD

ELP

is at hand

HELP/Control™— an on-line help system for the IBM-PC. HELP/Control includes HELP/Runtime, HELP/Popup and our help screen compiler.

With HELP/Runtime, a few simple subroutine calls add context sensitive on-line help to your application. HELP/Runtime includes tested interfaces for C (Microsoft and Lattice), Pascal (Microsoft and Turbo), IBM BASIC (Interpreter and Compiler), Microsoft FORTRAN, COBOL (IBM and

Use our concise screen definition language to build your help files. You define the bold captions on your help screens and specify the links to other screens. If you have existing documentation files, we supply a program which automatically marks them up to get on-line quickly. You can put an entire user or reference manual on-line, completely accessible to the user at all times

HELP/Control also includes HELP/Popup, which provides memory resident access to your custom help screens. Use it to document dBase and 123 applications. HELP/Popup uses the same help files as HELP/Runtime and operates the same from the user's point of view, allowing you to provide a consistent on-line environment across diverse applications.

The complete package (software, on-line manual, printed manual, and demo programs) costs \$125.00 and includes a royalty-free license to add HELP/Runtime to your applications and a license to make 25 copies of HELP/Popup. A demonstration diskette, including the on-line manual, costs \$15.00. To order or fee manual strengths final units dealer multiple copy, and site license printers. \$15.00. To order, or for more information (including dealer, multiple-copy and site-license pricing) call MDS at 207/772-5436. We accept MasterCard and VISA.

New options with release 1.20:

- Use Dan Bricklin's Demo Program to build your help system. Our translator turns it into a HELP/Control source file.
- Include graphics in your help screens.
- · Mouse support.




MDS, INC., P.O. BOX 1237, PORTLAND, MAINE 04104

C CHEST


FILES: STAT.C

*

Both of these Softstrips by Cauzin Systems contain complete versions of Listing One for this month's C Chest. The strip on the left is in high-density format, and the one on the right is in medium density.



FILES: STAT.C

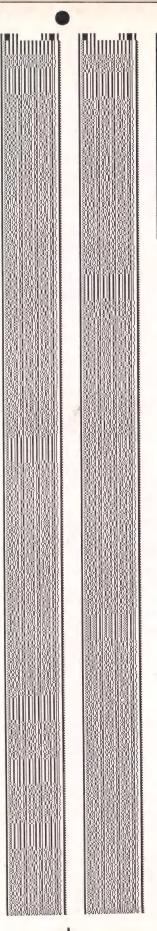

2

3

Statistical Applications of Digital Low-Pass Filters, Exec Bug in Microsoft C

In keeping with this issue's dual theme of music and scientific programming, this month's C Chest looks at a set of subroutines that have applications in both worlds.


Two of the more useful statistical functions are the arithmetic mean and standard deviation from that mean. Given some set of data points, the mean is just the average value of the points. The standard deviation is the average distance from the mean to the various data points. To be more precise, it's the square root of the arithmetic mean of the squares of the distance of each data point from the mean. The standard deviation is usually used as a measure of the dispersion of the various points around the mean-a sort of average-error indication—the higher the standard deviation, the larger the average error. In other words, it tells you how close the real data is to the average, or expected, value.

Computing a true mean and standard deviation can be quite difficult, especially if the number of data points is large or if these points have large values. It's easy to run out of precision because you have to sum all the points in the input sample before you can divide. Moreover, you can't compute either the true mean or deviation until you've collected all the data points; you can't do it on the fly. Fortunately, there are ways to approximate the mean and deviation that don't have these limitations. I'll

by Allen Holub

look at one of these here—an exponential smoothing function, or digital low-pass filter.

All sounds, regardless of the waveshape, can be broken up into the sum of a series of sine waves. The lowestfrequency component is the fundamental, and the higher-frequency components are called harmonics, or partials. A low-pass filter removes



the higher-frequency components from a particular sound and leaves the lower-frequency ones intact. Most stereos have a low-pass filter built into their tone controls. When you turn the treble control all the way down, all the high-frequency components of the sound are removed, leaving only the low-frequency components.

Mathematically, a low-pass filter is a "leaky integrator." It computes the integral, not of a whole curve, but of the most recently seen parts of the curve. You can look at an integral as the area under the curve—the area of a shape bounded on one side by some function and on the other by the x axis. Consequently, you can get a good approximation of the integral from a set of discrete, equally spaced points by summing all the distances from the x axis to the points. That is, if you consider each point to represent a box whose height is the distance to the curve and whose width is 1, the area of each box is the height and the total area is just the sum of the heights. If the distance between the points is not 1, you can compensate by multiplying the sum by the actual distance.

To use the integral as a low-pass filter, you limit the range of the integration, including in the sum only those points in an n-point wide window. The wider the window, the lower the cutoff frequency of the filter. That is, when a larger part of the curve is included in the sum, the parts of the curve that change fastest (the higher-frequency components) tend not to affect the sum as much as the components that change more

slowly. Returning to statistics, the value of the arithmetic mean is just the integral divided by the number of points.

For those of you who are electronically inclined, a standard low-pass filter circuit is shown in Figure 1, page 105. If R_{leak} is removed, this circuit is an integrator. That is, the various voltages present in the input will all be summed in the capacitor, C. If the input is positive, the capacitor is charged; if the input is negative, the capacitor is discharged. The integrator has been modified, however, by putting a leakage resistor (Rleak) around the capacitor. This resistor causes the capacitor to discharge slowly, even when there's no input. The value of the resistor determines the rate of discharge, which in turn determines the width of the window.

Digital low-pass filters can be implemented in several ways. The most straightforward is actually to average some set of contiguous input points. Every time you acquire a new input point, you discard the oldest point, add the new one, and refigure the average. The more points that are included in the average, the lower the cutoff frequency. A fixed-length circular queue is a good choice of data structures. You can treat it as a queue when you insert new points and as an array when you average the points. This method, called a boxcar average, isn't too useful in practice, however. It's just too hard to keep all those points around, add them up, and then divide by the number of points every time you get a new input sample.

A more practical method that is similar to a true boxcar average is exponential smoothing. It's best explained with an example. Say you have a length-16 boxcar. Every time you get a new input sample, you subtract 1/16th of the current value from the average and then add

C Programmers! db_VISTA: high-speed Database written exclusively for C **NOW** offers SQL-based Query

"db_VISTA™ has proved to be an all-round high performer in terms of fast execution..." John Adelus, Hewlett-Packard Ltd./Office Productivity Division

igh-speed data retrieval and access. just two benefits of using RAIMA's network model DBMS, db_VISTA. Combine these benefits with those of C—speed, portability, efficiency, and you begin to understand db_VISTA's real measure... performance.

db_QUERY : new simplicity retains performance!

db QUERY, our new C-linkable, SQLbased, ad-hoc query and report writing facility ... provides a simple, relational view of db_VISTA's complex network database. No longer will you give up performance for simplicity ... combine db_QUERY with db_VISTA ... you have both!

Independent Benchmark proves High-Speed model 2.76 times faster

An independent developer benchmarked db_VISTA against a leading competitor. Eleven key retrieval tests were executed with sequentially and randomly created key files.

*Result of 11 Key Retrieval Tests

db_VISTA :671.24 seconds Leading Competitor :1,856.43 seconds

db_VISTA's high-speed network database model lets you precisely define relation-ships to minimize redundant data. Only those functions necessary for operation are incorporated into the run-time program.

Application Portability Complete Source Code

For maximum application portability, every line of db_VISTA's code is written in C and complete source code is available. db_VISTA operates on most popular computers and operating systems. So whether you write applications for micros, minis, or mainframes...db_VISTA is for

How db_VISTA works...

Design your database and compile your Design your database and compile your schema file with the database definition language processor. Develop application programs, making calls to db_VISTA's C functions. Edit and review your database using the Interactive Database Access utility. Compile and link your C program with the db_VISTA runtime library and with the db_VISTA run-time library, and your application is ready to run.

Multi-user and LAN capability

Information often needs to be shared. db_VISTA has multi-user capability and supports simultaneous users in either multi-tasking or local area networking environments, allowing the same C appli-cations to run under UNIX, MS-DOS, and



Royalty-Free Run-Time

Whether you're developing applications for a few customers, or for thousands, the price of db_VISTA or db_QUERY is the same. If you are currently paying royalties for a competitor's database, consider switching to db_VISTA and say goodbye to

FREE Technical Support For 60 days

Raima's software includes free telephone support and software updates for 60 days. Technical support personnel are available to answer questions about our software or

30-Day Money-Back Guarantee

Try db_VISTA for 30 days and if not fully satisfied, return it for a full refund.

Price Schedule

	db_VISTA	db_QUER
☐ Single-user	\$ 195	\$ 195
Single-user w/Source	\$ 495	\$ 495
☐ Multi-user	\$ 495	\$ 495
Multi-user w/Source NEW:	\$ 990	\$ 990
□ VAX Multi-user	\$ 990	\$ 990
□ VAX Multi-user w/Source	\$1980	\$1980

Call Toll-Free Today! 1 (800) db-RAIMA (that's 1-800-327-2462) --- OR Call 1-206-828-4636





Read what others say . . .

"If you are looking for a sophisticated C programmer's database, db_VISTA is it. It lets you easily build complex databases with many interconnected record types. Raima's customer support and documentation is excellent. Source code availability and a royalty-free run-time is a big plus."

Dave Schmitt, President

Lattice. Inc.

"My team has developed a sophisticated PC-based electronic mail application for resale to HP customers. db_VISTA has proved to be an all-round high performer in terms of fast execution, flexibility and portability, and has undoubtedly saved us much time and development effort." John Adelus, Hewlett-Packard Ltd. Office Productivity Division

"On the whole, I have found db_VISTA easy to use, very fast with a key find, and powerful enough for any DBMS use I can imagine on a microcomputer.

Michael Wilson, Computer Language

db_VISTA Version 2.2

- Multi-user support allows flexibility to run on local area networks
- File structure is based on the B-tree indexing method and the network database model
- Run-time size, variable—will run in as little as 64K, recommended RAM size is 256K
- Transaction processing assures multi-user database consistency
- File locking support provides read and write locks on shared databases
 SQL-based db_QUERY is linkable
- File transfer utilities included for ASCII, dBASE optional
- Royalty-free run-time distribution.
- Source code available.

Database Record and File Sizes

- Maximum record length limited only by accessible RAM
- Maximum records per file is 16,777,215
- No limit on number of records or set
- Maximum file size limited only by available disk storage
 Maximum of 255 index and data files

Keys and Sets

- Key length maximum 246 bytes
- No limit on maximum number of key fields per record—any or all fields may be keys with the option of making each key unique or duplicate

 No limit on maximum number of fields per record, sets per database, or sort fields per set
- · No limit on maximum number of member record types per set

- Operating System
 & Compiler Support
 Operating systems: MS-DOS, PC-DOS, UNIX, XENIX, SCO XENIX, UNOS, ULTRIX, VMS
- C compilers: Lattice, Microsoft, IBM, DeSmet, Aztec, Computer Innovations, XENIX and UNIX

Utilities

- Database definition language processor
- Interactive database access utility
 Database consistency check utility
 Database initialization utility
- · Multi-user file locks clear utility
- · Key file build utility
- Data field alignment check utility
 Database dictionary print utility
 Key file dump utility

- ASCII file import and export utility

*The benchmark procedure was adapted from "Benchmarking Database Systems: A Systematic Approach" by Bitton, DeWitt and Turbyfill, December 1983.

Call Toll-Free Today! 1 (800) db-RAIMA

(that's 1-800-327-2462)

REFRESH YOUR MEMORY

WITH DR. DOBB'S LISTINGS ON DISK

Dr. Dobb's Listings #1

JANUARY—APRIL 1986 January Issue #111 "A Simple OS for Realtime Applications; 68000 Assembly Language Techniques for an Operating System Kernel" by DDJ editor Nick Turner. February Issue #112 "Data Abstraction with Modula-2" by Bill Walker and Stephen Alexander March Issue #113 "Concurrency and Turbo Pascal: An Approach to Implementing Coroutines in Pascal" by E. Bergmunn. April Issue #114 "Boca Raton Inference Engine; Lsp, Prolog, and Expert 2 Techniques and Code" by Robert Brown.

Dr. Dobb's Listings #1/86 Item #170 \$14.95

Dr. Dobbs Listings #2

MAY-AUGUST 1986 Includes listings from the following articles, and more. May Issue #115

"Simple Plots with the Enhanced Graphics Adapter" by Nabajyoti Barkukati.

June Issue #116

"Compuserve B Protocol" by Steve Wilhite.

July Issue #117

"Structured Programming; Tiny Tools, Array-Defining Words" by Michael Ham. August Issue #118

"Structured Programming; Generic Routines in Ada and Modula-2. Extended For Loop" by Namir Shammas.

Dr. Dobb's Listings #2/86 Item#171 \$14.95

Dr. Dobb's Listings #3

SEPT. - DECEMBER 1986 Includes listing from the following articles, and more. September Issue #119

"Algorithms: Curve Fitting with Cubic Splines" by Ian E. Ashdown.

October Issue #120

"C Chest: More, a File-Browsing Utility" by Allen Holub. "Processors: TNZ: November Issue #121 "Digital Dissolve" by Mike

Morton. December Issue #122

Dr. Dobb's Listings #3/86 Item #172 \$14.95

Please specify MS-DOS, Macintosh, or CP/M. For CP/M disks specify: Apple, Osborne, Kaypro, Zenith Z-100 DS/DD, 8" SS/SD (1986 Listings Only).

Dr. Dobb's 1987 Listings

You may also receive on disk all the source code for articles in the following issues. Available formats: MS-DOS, Macintosh, Kaypro.

January 1987 Item #D123 \$14.97 February 1987 Item #D124 \$14.97 March 1987 Item #D125 \$14.97 **April** 1987 Item #D126 \$14.97 May 1987 Item #D127 \$14.97

To Order: Return this order form with your payment to M&T Books, 501 Galveston Dr., Redwood City, CA 94063 Or, Call TOLL-FREE 800-533-4372 Mon-Fri 8AM-5PM. In CA call 800-356-2002.

		Subtotal_	
Item #	Description		Price
Item #	Description		
City	State	Zip	
Address			
Name			

CA residents add sales tax. __% __ Add \$2.25 per item for shipping ___

TOTAL_

☐ Check enclosed. Make Payable to M&T Publishing.

Charge my UVISA □ M/C □ Amer.Exp. Card No. _

Exp. Date_ Signature_

Please specify disk format

MS/PC-DOS	Macintosh

CP/M: ☐ Kaypro ☐ Osborne

Apple Zenith Z-100 DS/DD 8" SS/SD

C CHEST

(continued from page 102)

1/16th of the new sample's value to the average. In pseudocode:

```
Width = 16:
while(1)
 Boxcar -= Boxcar / Width;
 Boxcar += input() / Width;
```

Because you're always subtracting 1/16th of the current boxcar, the contents change exponentially. (Think about what happens if all the input samples suddenly go to zero; the value of Boxcar will decrease by 1/16th of its former value every time through the loop.) Figure 2, below, shows a simple case that demonstrates the exponential aspect of the algorithm going in the other direction. I'm using a length-16 boxcar, and the input set defines a straight, horizontal line (marked with asterisks). The mean (marked with ms) starts out at 0 and gradually (expo-

nentially) converges on the input line. If the boxcar had been smaller, it would have converged faster.

You'll notice a few similarities between this algorithm and the electronic equivalent in Figure 1. In particular, Width takes the place of Rleak in the circuit. That is, changing the width of the window effectively changes the cutoff frequency of the filter. If Width is 1, there will be no filtering; the input will just pass through to the output. When Width is 16, no change in the input that happens in fewer than 16 samples will make it through to the output. That is, only those changes in the input that happen more slowly than the rate at which the average changes will make it through to the output.

Exponential smoothing can be implemented naively using the above algorithm, but as in most such algorithms, a little thought gives you both more efficiency and more accuracy. There are two changes that are easy to make. First, by limiting the boxcar length to a power of 2, you can replace the divides with right shifts.

Second, rather than have the Boxcar variable hold the mean itself, you can make it hold 16 times the mean, thereby eliminating one of the divides and giving you better precision at the same time. The modified algorithm is:

```
while(1)
 Boxcar -= Mean;
 Boxcar += input();
 Mean
          = Boxcar >> 4;
```

The boxcar is updated with every input sample. The mean is computed by dividing Boxcar by 16. (A right shift of 4 bits is a divide by 16.) When you subtract Mean from Boxcar, you're effectively subtracting 1/16th of the mean from itself. You don't loose any precision here, though, as you would if you divided before subtracting.

Now let's apply the boxcar algorithm in a digital-filter application. Figure 3, page 106, shows the algorithm being used on a triangle wave.

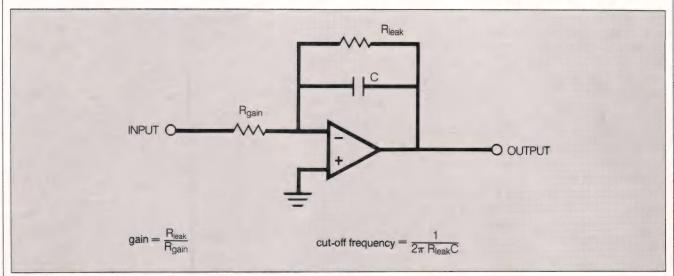


Figure 1: Analog low-pass filter or leaky integrator

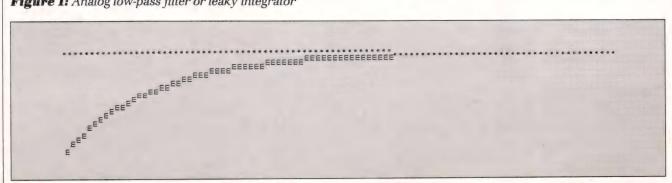


Figure 2: Behaviour of an exponential smoothing function on a straight line

(continued from page 105)

The input data is the same in all three parts of the figure, but the length of the boxcar is different. In all three cases, the input is marked with asterisks, the boxcar average with sideways ms, and the true average (arithmetic mean) with sideways as. The input data contains 100 points per cycle (200 points in the entire graph). Figure 3a shows a boxcar of length 4. Here there's not much to see. The points on the input triangle are slightly rounded, but that's about it. It's interesting to note the slight phase shift between the input and output. This phase shift is also a characteristic of analog low-pass filters (built with capacitors, resistors, and such). It's caused by the amount of time required to charge the capacitor in the analog filter. In the digital equivalent, it's the amount of time needed for the mean to ramp up to the output value. So, you'd expect the phase shift to increase as the width of the boxcar (or the value of the capacitor) increases.

Figure 3b shows the same input, now being filtered with a length-16 boxcar. Here the effect of the filter is noticeable. Most of the high-frequency harmonics of the triangle have been removed, leaving something very close to a sine wave representing the fundamental. Note that the phase shift has increased with the amount of filtering, just as expected.

In Figure 3c, I'm using a length-64 boxcar. Pretty much all the harmonics now have been removed, and I've just about eliminated the fundamental, too. If I were to increase the boxcar length to 100—the number of points per cycle in the input—then I'd filter out the fundamental entirely, leaving a straight horizontal line. It makes sense if you think about it. If you average a complete cycle of a sine wave, there will be a negative point to match every positive point, so the average over the entire cycle will be zero.

So the cutoff frequency of the lowpass filter is a function of the sample rate (in data points) and the width of the boxcar. The wider the boxcar, the lower the cutoff frequency. When the boxcar has the same number of points in it as a sine wave of a particular frequency, that frequency won't make it through the filter at all. Computing the actual cutoff frequency of a digital filter—one that's not a nice power of 2, for instance—is nontrivial, however. If you're interested, there's a good description in Hal Chamberlin's book (cited in the bibli-

ography), pages 481-495.

Now, let's bring all this back into the realm of statistics. Looking again at Figure 2, because the input data is a horizontal straight line, the arithmetic mean is the same straight line. Consequently, in this example the

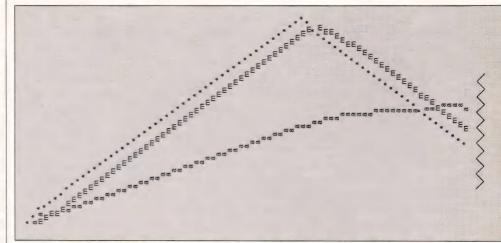


Figure 3: Varying the window width in an exponential smoothing function.

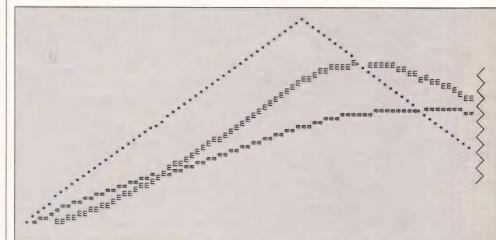


Figure 3b: Length-16 window

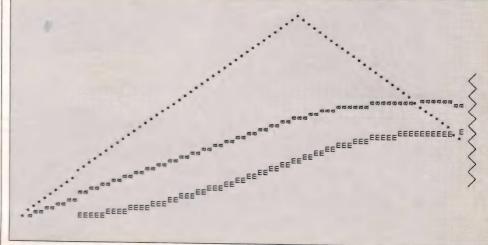


Figure 3c: Length-64 window

boxcar average is converging on the true mean exponentially and reaches it after about 50 points are processed (there are 100 points in the graph).

Looking at Figure 3c, the same thing is happening. The boxcar average is converging gradually on the

true mean (toward the right side of the graph). In fact, this characteristic is generally true. A boxcar average will converge on the arithmetic mean given enough input points. The shorter the boxcar, the faster it converges. Note, however, that if the boxcar is too short, you end up with a digital filter that never converges, as in Figure 2a. Here the boxcar just tracks the input data without ever approaching the mean. So you have to do a balancing act. The longer the boxcar, the closer you'll get to the



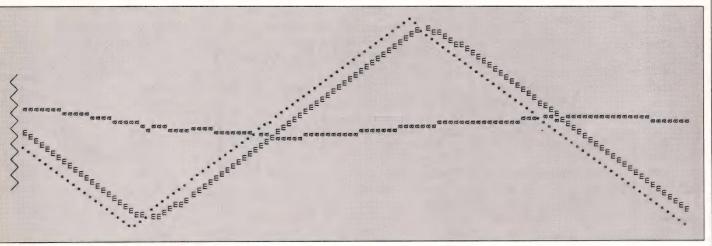


Figure 3a (above): Length-4 window



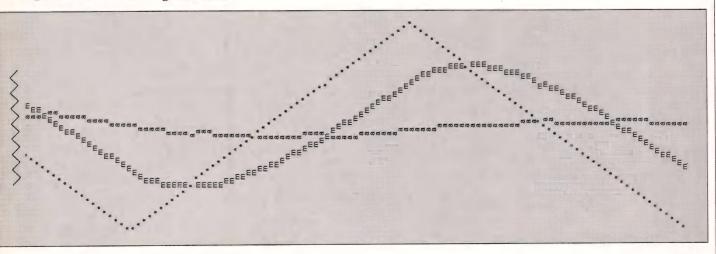

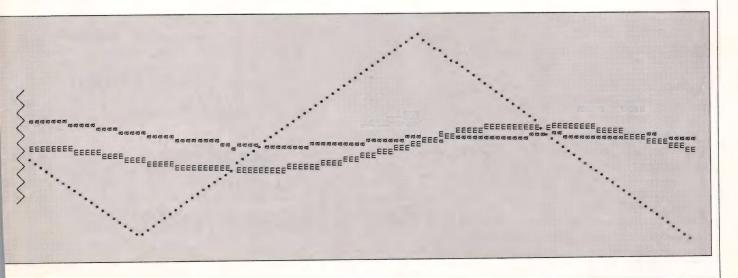

ADVANTAGEC++

This new object-oriented language lets you develop large and complex programs with greater resilience, fewer bugs. Write reliable, reusable code that is easier to understand and maintain. Fully compatible with existing C programs and tools. All the benefits of without its limitations. Available for Lattice and Microsoft Latest From C compilers; MS-DOS LIFEBOAT and XENIX operating systems.

Lattice C Compiler

The latest update of the ideal tool for developing high-performance MS-DOS applications in C. Full implementation of K&R C with UNIX and ANSI extensions. Offers the widest selection of C support tools. Now with Micro-Lattice soft Windows support.

Microsoft FORTRAN

New version produces smallest, fastest PC code. Uses the same optimizer and code generator from the Microsoft C compiler. Full ANSI FORTRAN 77 compatibility. GSAcertified to be error-free at the highest level. Includes advanced intrinsic math functions, Microsoft's CodeView debugger, a MAKE utility, linker, library manager and many other enhancements. Microsoft

Pascal-2

Have you reached the limits of Turbo? Upgrade to Pascal-2 without loss. Easy migration path from Turbo with compatible strings. equivalent procedures and access to Turbo graphics. Cut execution time by 200% over Turbo. Use all of DOS-accessible memory through efficient, large memory model. Speed development time with sophisticated error checking and reporting. Call Microsoft languages. Plus interactive source-level debugger, error walkback, Intel CEL87 math library, high-OREGON SOFTWARE level profiler.

ADVANTAGE Link

The fastest, most powerful PC-DOS linker available, and the first to take full advantage of EMS. Accepts Microsoft and Phoenix Brand New command files, and is LIFEBOAT compatible with Micro-

VEDIT PLUS

soft CodeView.

For years, thousands of programmers have depended on VEDIT. If you take your editing seriously, take a good look at the all-new VEDIT PLUS.

Open windows to simultaneously edit several files. Access editing functions with pop-up menus. Use keystroke macros to speed editing. And run other programs within VEDIT PLUS - all with uncompromising speed, flexibility and power. VEDIT PLUS is completely customizable and available for MS/PC-DOS, CP/M 80/86. Ask for your FREE demo/

CompuView

Greenleaf Data Windows

tutorial disk.

A new concept C library containing overlayed logical windows, transaction data entry and three kinds of menu systems. Features virtual windows, many data types, device independence, total screen management and more. Simple to use, yet highly sophisticated. Supports all major compilers, all models, auto installation. Over 125 functions, no royal-GREENLEAF ties, source available.

PANEL Plus

Advanced screen manager with a screen designer, code generator and function libraries. Works with popular graphics libraries to allow data entry in graphics modes, Includes full. portable library source code.

HALO

HALO, since 1981, the industry standard library of graphic subroutines. HALO has the largest installed base of end-users and more ISV's than any PC graphics software environment. Why? Because HALO grows with the industry. Constantly improved, HALO now supports 16 programming languages and over 125 devices. Media Cybernetics offers HALO programmers professional support, practical licensing and the continuing commitment to assure that HALO will always be one of the most effective graphic toolkits available. media cybernetics, inc.

TimeSlicer

A library of C functions to create multitasking and real-time programs at the application level rather than interfacing with the operating system. Create, suspend or terminate tasks at run-time. Compatible with Lattice C, Microsoft C, ADVANTAGE C++ LIFEBOAT and object-oriented programming.

We make the best software even better.

After 10 years of publishing software, we know what's important to you. Our expert staff can help you choose the right programs and provide full technical support. Count on Lifeboat for the complete solution to all your programming needs.

The names of the products listed are generally the trademarks of the sources of the products

Call 1-800-847-7078 In NY 914-332-1875 or see your local Lifeboat Affiliated Dealer

The Full-Service Source for Programming Software

55 South Broadway Tarrytown, NY 10591 Telex # 510-610-7602

INTERNATIONAL SALES OFFICES

Australia/New Zealand: Charlton Distributors Phone: (64) (09) 766-361 Canada: Scantel Systems Phone: (416) 449-9252

England: Grey Matter, Ltd. Phone: (44) 364-53499 System Science, Ltd. Phone: (44) (01) 248-0962 Phone: (45) 30 07 37

Italy: Lifeboat Associates Italia Phone: (02) 464601 Japan: Lifeboat, Inc. Phone: (03) 293-4711 Spain: Micronet, S.A. Phone: (34) 1-262-3304

The Netherlands: SCOS Automation BV Phone: (31) 20-10 69 22
West Germany: MEMA Computer GmbH Phone: (69) 34-7226 Omnitex Phone: (76) 23-61820

(continued from page 107)

true arithmetic mean. On the other hand, a long boxcar takes more time to converge than a short one. If the boxcar is too short, you'll never converge.

Figure 4, page 110, shows the boxcar algorithm being applied to a set of input points randomly distributed around a straight line. As before, asterisks are used to mark the points, sideways as are the arithmetic mean. and sideways ms are the boxcar average. Figure 4a shows a length-4 boxcar. Here the boxcar output jumps around almost as much as the input data, so it's not all that useful. In Figure 4b, a length-16 boxcar is applied. The boxcar converges on the mean after about 50 points. It still jumps around a bit, though. Figure 4c shows a length-64 boxcar. It tracks the arithmetic mean very closely after about 150 samples. On the other hand, it takes 150 samples to get close enough to be useful. Note that this last example could be made to converge faster if you initialized the boxcar to the arithmetic mean of the first few points rather than to zero.

Implementation

All this stuff is implemented by the short set of routines in Listing One, page 97. In fact, Figures 3 and 4 are output from the program in Listing One. There are six subroutines here. Newsample() passes a new sample into the boxcar. It is called for every input point. Running_mean() returns the current value of the exponential boxcar average, true_mean() returns a true arithmetic mean, and deviation() returns an approximation of the standard deviation (also computed with an exponential boxcar). Given the distance (call it D) between any given sample and the true mean, the standard deviation is the square root of the average D2.

The *true_mean()* function is here mostly to check the algorithm. It won't work if the sum of the input samples requires more precision than a *long* can muster.

The boxcar average is calculated on lines 39-41 of Listing One, using the algorithm described earlier. The standard deviation is computed in a similar way. A boxcar average of the squares of the differences between the boxcar mean and the current input sample is kept by the code on lines 43–48. The difference is figured on line 43. It's squared on line 44 and then added into the running average on lines 46–48. The square root is taken on line 71, when the standard deviation is requested. This delay saves you the overhead of taking a square root with every sample. On the down side, you can overflow the boxcar if the samples are too big.

The final subroutine of interest is

Exec() functions in the Microsoft C compiler don't work correctly when putenv() is also used.

reset_mean() on lines 76–85. It resets all the boxcars to 0, and its parameter can be used to set the boxcar length. Note that because Boxlen is used to do a right shift rather than a divide, the parameter to reset_mean() is actually 2, raised to the boxcar_valth power. You may want to add a second argument to this routine—an initial value of the boxcar. You can then take the true_mean() of the first few samples and use that value to initialize the running mean.

You may want to make several other changes, depending on your application. First, because the true mean is not all that reliable, you'll probably just want to remove it from the routines. Delete the Average and Numnums variables and all references to them, including the true _mean() subroutine. Next, all my variables are unsigned longs. Consequently, I can't keep a fractional mean around, and the range of the data is limited to the precision of a long. You may want to change all these to doubles. Finally, Boxlen is the number of bits to shift rather than a true divisor. This means that the boxcar length is limited to powers of 2, which may not be enough resolution for you. On the other hand, it lets you use an efficient implementation of the boxcar. If you go to something other than a power of 2, you'll need to use something closer to the naive algorithm, introducing an extra divide into the algorithm and slowing it down. One final easy-to-do improvement helps with the start-up time and was mentioned earlier. As vou've seen, when left to its own devices, the algorithm converges exponentially. You can improve this behavior by taking the true mean of the first few samples and then using the value of the true mean as the algorithm's starting point, rather than 0.

Microsoft Bug of the Month

A quick note about a bug I found in the Microsoft C compiler, Version 4.0. The exec() functions don't work correctly when putenv() is also used in the same program. Memory gets fragmented in ways that make a second exec() call return with an "out of core" error status (ENOMEM). One way around this bug is to mimic Unix and write your own putenv(). Start out in main() by copying the environment strings into a static array. Envp, an argv-like pointer to the environment strings, is passed as the third argument to main(). There's no count, however-Envp has a NULL in the last entry. Once the environments are copied, you can add new strings to your own static array instead of calling putenv(). You can then exec to another program with the execve() function, which is passed an environment that it in turn passes to the child process. Of course, if you use this method, you'll need to write your own getenv(), too (because the default routine doesn't know about your static array).

Nifty Stuff

I get a lot of stuff in the mail. Most of it's not very interesting, but occasionally something useful comes along. Hitherto, I've just mentioned the products I've liked without giving much additional commentary, but I've decided to start writing slightly longer reviews for products I particularly like. Two such are Custom Software Systems' implementation of the Unix vi editor (PC/VI, Version 1.11) and Lattice's version of the Unix

C CHEST

(continued from page 109)

make utility (LMK, Version 2.20b).

PC/VI

PC/VI is a full implementation of vi-

and I do mean full. From the user's perspective, it is identical to the Unix program. If you're familiar with the real vi, you can install PC/VI and then use it immediately, without ever looking at the manual. Unlike other vi implementations I've seen, PC/VI

supports full visual and ex modes, macros (using both :map and :abbre-viate), and full regular-expressions (in both searches and ex-mode substitutions), and it can edit very large files (though it slows down when the file gets too large). It even has a LISP

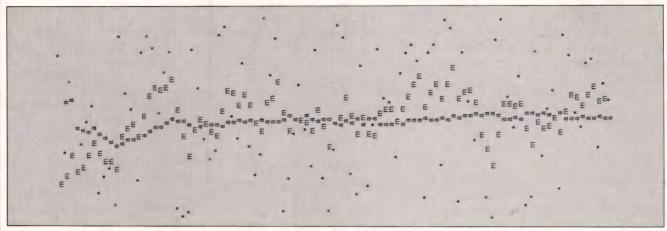


Figure 4: The effect of exponential smoothing on randomly distributed data. Figure 4a (above): Length-4 window

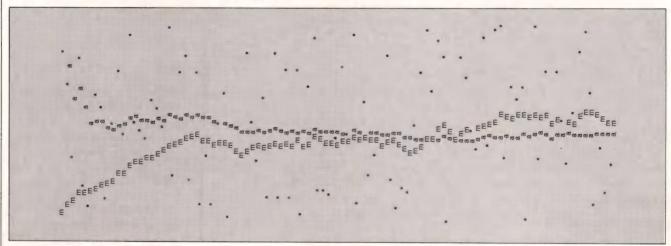


Figure 4b: Length-16 window

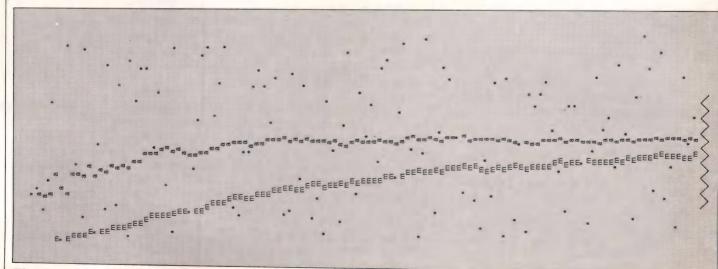


Figure 4c: Length-64 window

mode. Moreover, Version 1.11 is bug free as far as I can tell. (Z, the vi shipped with the Aztec compiler, has an annoying tendency to go off into outer space occasionally, taking your work with it.) The PC/VI shell escape works perfectly with both my own shell and COMMAND.COM; it gets the shell's name from COMSPEC. Because Version 1.11 uses unique file names for temporary files, you can even invoke PC/VI from within a shell that was created from within PC/VI-assuming you've enough memory. It supports all the vi command-line switches (+number, +/pattern, -ttag, and so forth) and an EXINIT environment too.

PC/VI also supports tags, a feature particularly useful to programmers. Tags give you the ability to edit a large program by subroutine rather than by file. You first run a program called CTAGS, which creates a tags file, a cross-reference of your C program. You can then ask PC/VI to show you a particular subroutine (either with a :ta < file > command or with a Ctrl-]), and it will automatically save the current file, read in the file that holds the subroutine, and position the cursor at the first line of the subroutine itself. PC/VI comes with a CTAGS, though this program works only with C and assembly-language source files. It's not too difficult to make your own tags file using a program such as grep, however.

And if all this weren't enough, PC/VI is terminal independent—it's not tied down to the IBM PC. It uses TERM-CAP files for configuration purposes

and even comes with a complete TERMCAP interface library that you can use in your own programs (it's an object-module library that can link only to Microsoft C compiled programs, though).

Several versions of PC/VI are on the distribution disk (for a vanilla PC, for a non-PC MS-DOS computer, for a PC/ AT, and so forth), so you can choose the version that's most appropriate for your application. It also comes with CTAGS; the TERMCAP libraries, a TERMCAP configuration file with support for about 15 terminals (IBM PC, VT-100, ANSI, H-19, D4XX, and so forth as well as support for Hersey Micro Consulting's FANSI-CONSOLE driver); and SPLIT, a utility that breaks up large files into smaller chunks. PC/VI does have one failing-it doesn't support the !! command from visual mode (which executes a command from a subshell and then inserts the standard output from that command directly into the document). This can be accomplished by redirecting to a file from a normal :! shell escape and then reading the file with a :r, however.

Make

The Lattice make, called LMK, is an enhanced version of the Unix make utility. It has all the functionality of the Unix program, and to my knowledge, it's the most powerful on the market (though, at \$125, it's also one of the most expensive). The only make that comes close is Polymake (from Polytron Software), but Polymake has two limitations that grate

after a while. I should preface my complaints by saying that the version of Polymake I've been using is more than a year old—I haven't had any notifications of an update, though.


The first problem with Polymake is its inability to deal with subdirectories correctly—at least, it gets very confused when the dependencies, the file being made, and the makefile itself are all in different directories. The ability to deal with subdirectories is useful when you keep a large library directory and you want the sources in one subdirectory, the object modules in a different subdirectory, and the library itself somewhere else again. LMK has none of Polymake's limitations; it happily makes anything anywhere.

The second problem with Polymake is the large amount of memory it uses by itself when it's working. I need this memory for my own programs. Of the three makes I have around, Polymake performs the worst in this department (requiring almost 96K for itself); next (at 84K) is the make that comes with the Microsoft C compiler. The best performer, however, is LMK, which uses only 35K of core. (I got these numbers by running chkdsk from within a makefile.) A lot of memory is saved by the Lattice product's simply not executing a shell unless it actually has to. If you tell LMK to run a normal program, it does so without the extra baggage of a second command interpreter in memory.

I should add as an aside that I'm using my own shell, rather than COM-MAND.COM, as a subshell to LMK. It has no problems with this configuration as it reads the shell's name from the COMSPEC environment rather than assuming that the shell is called COM-MAND.COM. This capability lets me use my own shell's script files from within make (rather than normal COMMAND.COM batch files). Unfortunately there's one unnecessary, shellrelated problem—LMK wastes memory by invoking a shell to do redirection. It ought to do the redirection itself.

Availability

All the source code for articles in this issue is available on a single disk. To order, send \$14.95 to *Dr. Dobb's Journal*, 501 Galveston Dr., Redwood City,

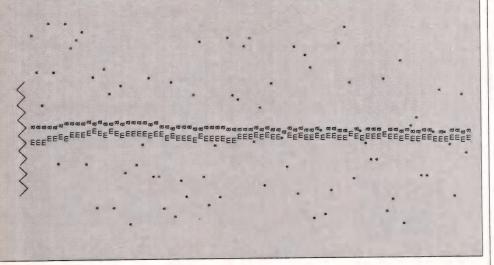

Ever Program On A Silver Platter??

How much would you expect to pay for a 32 bit MC 68000 computer that's a mainframe condensed down into a keyboard? How about \$188.00!!?? If it makes you feel any better simply add a zero to the price when you order! But that's actually our price!!! The most powerful computer money can ever buy is now the most inexpensive computer money can buy!!! So don't buy the name! Buy the power!! The power is **not** in the name!


If you had the opportunity to work amongst Machine Code ROM Designers, VAX & UNIX wizards in a research laboratory, designing an MC 68000 based computer that's 2nd to none. . .


What would you come up with?? And what would you call it??

Well It's Already Been Done!!
They Called It The QL For The Quantum Leap It Is!!

Absolutely a Quantum Leap beyond what you know & use - and it's truly like Programming on a Silver Platter!!





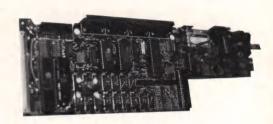

The QL Desktop Minicomputer: Designed by SRL Labs, manufactured by Samsung. An absolute Quantum Leap beyond all the rest! The phenomenal open architecture QDOS: with Virtual Memory RAM, Multitasking Job Control, Multiuser Networking. It'll Cache Files into unused Memory and create/delete Directories Automatically! Even allows File Names up to 36 characters long! Everything is built into ROM here: QDOS, Networking, Windowing, & 32 Bit SuperBasic, all in a totally concurrent non-destructive environment. Unlimited quantities & lengths allowed with: Variables, Program Lines, CONsoles & Buffers. Dynamic non-destructive virtual RAM Disking & Networking buffers too! Even a System Variables Brain Page Screen! Built-in DCE & DTE Serial Ports.

Language Environments:

Metacomco's "C", LISP, BCPL, 68000 Assembler, APL, Development Kits. Prospero's Pro Pascal & Pro Fortran 77. Digital Precision's Forth-83. QJUMP's 65C02 or 8088 Cross Assembly ROMs. Everything generates native 68000 Compiled Code. ROM Firmware & Software Package is now available which will even bring it up in CPM!

Imagine working with a 32 bit SuperBasic that's structured like Turbo Pascal, powered beyond PIC Basic, in an interpretor always present with QDOS, all concurrently running in a built-in UNIX-like multitasking job controlled environment with access to 360 fully channeled windows, devices & files by EACH job! 3 Major Compilers already exist for the SuperBasic source alone! TURBO, SUPERCHARGE, QLIBERATOR! The compiled SuperBasic code or ANY other language will multitask and control with QDOS and SuperBasic. The list of ALL the Superior Features would fill this entire publication!

The QL comes bundled WITH PSION Integrated Word Processor, Spreadsheet, Database and Presentation Graphics Programs. PLUS: Our FREEWARE Demos & Utilities with all purchases! Plus \$12 Shipping and Handling

Call: (201) 328-8846

QLine BBS: 328-2919



Technical Info & Assistance – Our Phones are Manned 24 Hours a Day Lot Purchases Available. We Direct Distribute.

Quantum Computing, Box 1280, Dover, NJ 07801



CIRCLE 144 ON READER SERVICE CARD

C CODE FOR THE PC

source code, of course



o source odde			
GraphiC 3.0 (high-resolution, DISSPLA-style scientific plots in color & hardcopy)		9	300
Essential C Utility Library (400 useful C functions)		9	3160
Essential Communications Library (RS-232-based communication system primitives)		9	3160
Panache C Program Generator (screen-based database management programs)		9	3125
B-Tree Library & ISAM Driver (file system utilities by Softfocus)		9	3100
The Profiler (program execution profile tool)		3	3100
QC88 C compiler (ASM output, small model, no longs, floats or bit fields, 80+ function library)			\$90
ME (programmer's editor with C-like macro language)			\$75
Wendin Operating System Construction Kit			\$75
Wendin Operating System Shell (PCVMS or PCNX)			\$75
EZ_ASM (assembly language macros bridging C and MASM)			\$60
Make (macros, all languages, built-in rules)			\$50
Coder's Prolog (inference engine for use with C programs)	٠		\$45
PC/MPX (light-weight process manager; includes preemption and cooroutine packages)			\$45
Biggerstaff's System Tools (multi-tasking window manager kit)			\$40
TELE Kernel (Ken Berry's multi-tasking kernel)			\$30
TELE Windows (Ken Berry's window package)	٠		\$30
Clisp (Lisp interpreter with extensive internals documentation)			\$30
Translate Rules to C (YACC-like function generator for rule-based systems)			\$30
6-Pack of Editors (six public domain editors for study & hacking)			\$30
ICON (string and list processing language, Version 6)	٠		\$25
LEX (lexical analyzer generator)			\$25
C Compiler Torture Test (checks a C compiler against Kernighan & Ritchie)	٠		\$20
A68 (68000 cross-assembler)			\$20
Small-C (C subset compiler for 8080 and 8088)			\$20
tiny-c (C subsubset interpreter including the tiny-c shell)			\$20
Xlisp 1.5a (Lisp interpreter including tiny-Prolog in Lisp)			\$20
List-Pac (C functions for lists, stacks, and queues)		٠	\$20
XLT Macro Processor (general purpose text translator)			\$15
C Tools (exception macros, wc, pp, roff, grep, printf, hash, declare, banner, Pascal-to-C)	•		\$15
Data			
Webster's Second Dictionary (234,932 words)			\$60
U. S. Atlas (29,000 cities with retrieval program)			\$40
KST Fonts (13,200 characters in 139 mixed fonts: specify TEX or bitmap format)			
The World Digitized (100,000 longitude/latitude points)			\$30
NBS Hershey Fonts (1,377 stroke characters in 14 fonts)			\$15
U. S. Map (15,701 points)			

The Austin Code Works
11100 Leafwood Lane
Austin, Texas 78750-3409
(512) 258-0785

C Source Code

(continued from page 111)

CA 94063 or call (415) 366-3600 ext. 216. Please specify the issue number and format (MS-DOS, Macintosh, Kaypro).

Bibliography

Chamberlin, Hal. Musical Applica-

tions of Microprocessors. 2d ed. Hasbrouck Heights, N.J.: Hayden, 1985. This is a great introduction to electronic music in general. Chapter 14 has a lucid description of digital filter theory that's understandable to nonmathematicians.

Programs for Digital Signal Processing. New York: IEEE Press, 1979. This book has a wealth of FORTRAN pro-

grams for digital signal processing, including filter programs. It assumes you know enough theory to understand the programs, however—it's pretty dense.

Electronotes Newsletter, 1 Pheasant Lane, Ithaca, NY 14850, is a small but meaty periodical for electronic music hackers—people who want to actually build the stuff as well as play it.

Flotsam and Jetsam

Books

Several people have written requesting a reading list that covers both books about C and books about programming generally. This month's Flotsam and Jetsam contains such a list.

First, if you don't know a structured programming language, you're better off starting out by learning Pascal rather than C. Though Pascal isn't as powerful a language as C, it holds your hand quite a bit and forces you into good programming practices. A very good introduction to Pascal is Doug Cooper and Mike Clancy's Oh! Pascal (New York: Norton, 1982). Also of interest if you're coming to C from FORTRAN is Brian Kernighan and P. J. Plauger's The Elements of Programming Style, 2d ed. (New York: Yourdon, 1978). This book teaches structured programming techniques entirely in FORTRAN, an inherently unstructured language. You'll also need to know a little assembly language to learn C. In the IBM PC world, a good introduction to 8086 assembly language is Robert Lafore's Assembly Language Primer for the IBM PC and XT (New York: Plume/Waite, 1984). The rudiments of assembly language are also covered in The C Companion, discussed

In addition to programming languages, you'll need to know about data structures—binary trees, queues, linked lists, hash tables, and the like. Two excellent books are Robert L. Kruse's Data Structures and Program Design (Englewood Cliffs, N.J.: Prentice-Hall, 1984) and Aaron M. Tenenbaum and Moshe J. Augenstein's Data Structures Using Pascal, 2d ed. (Englewood Cliffs, N.J.: Prentice-Hall, 1986). Both books contain extensive examples written in Pascal.

Kruse's explanations (and his programs) are a little more clear than Tenenbaum and Augenstein's, and I prefer his book for this reason. Tenenbaum and Augenstein's book is more comprehensive, however. Also of interest is Robert Sedgewick's Algorithms (Reading, Mass.: Addison-Wesley, 1983), which contains algorithms for doing just about everything imaginable (at least in the realm of programming). Everything from splines to Gaussian elimination to sorting routines to fast Fourier transforms is covered. It's an invaluable reference.

As for C itself, the C language was originally brought to the world's attention by Brian Kernighan and Dennis Ritchie in The C Programming Language (Englewood Cliffs, N.J.: Prentice-Hall, 1978). The book is usually called K & R. Unfortunately, this book is dense to the point of unreadability in places. I don't recommend it unless you're a very experienced programmer, but if you fall into that category, it's very good. K & R is just a language description; it assumes that you know how to program. The best general introduction to C that I know of is Bryan Costales' C from A to Z (Englewood Cliffs, N.J.: Prentice-Hall, 1985). Herbert Schildt's C Made Easy (Berkeley, Calif.: Osborne/McGraw-Hill, 1985) is also good. Both of these books are much more readable than K & R. Neither covers the advanced parts of the language in depth, however.

There are several nontextbooks that are good aids to learning C. My own book *The C Companion* (Englewood Cliffs, N.J.: Prentice-Hall, 1986) was developed as supplementary class notes for a C class I teach. It covers many of the topics that are left out of most C textbooks—both basic top-

ics such as binary arithmetic and assembly language and advanced topics such as the complex uses of pointers and writing subroutines with a variable number of arguments. Another book worth having is Rex Jaeshcke's *Solutions in C* (Reading, Mass.: Addison-Wesley, 1986). Rex's book is a collection of C programming tips. He explains many of the more advanced parts of the language with numerous short examples.

Two good books of exercises are available. Clovis L. Tondo and Scott E. Gimple's The C Answer Book (Englewood Cliffs, N.J.: Prentice-Hall, 1985) contains answers for all the exercises in K & R. It's quite useful if you're using that text. Another good exercise book is Alan R. Feuer's The C Puzzle Book (Englewood Cliffs, N.J.: Prentice-Hall, 1982). The problems in this book address virtually every aspect of the C language. Moreover, the problems are designed to familiarize you with common errors that will probably show up as bugs in your programs. Every exercise is accompanied by a detailed solution. I could have saved myself weeks of debugging time had this book been available when I first learned the language.

The best reference to the C language is Samuel P. Harbison and Guy L. Steele, Jr.'s C: A Reference Manual (Englewood Cliffs, N.J.: Prentice-Hall, 1984). The second edition (1987), which incorporates the ANSI extensions, should be available by the time you read this column. Of course, the ANSI standard itself (X3-J11) is a good reference. The public review period for the draft standard ended March 7, so the real standard should be available any time now. For more information, contact the X3 Secretariat:

It's invaluable if you're in that category.

DDJ

(Listings begin on page 64.)


Vote for your favorite feature/article. Circle Reader Service No. 5.

Computer and Business Equipment Manufacturers Association, 311 First St. NW, Ste. 500, Washington, D.C. 20001-2178; (202) 737-8888. Unfortunately, the standard is very expensive (\$65 for a few hundred Xeroxed pages). Check the computer science library of a local university before acquiring a copy for yourself.

The final category of books is the useful-examples-of-nontrivial-programs category. Several good books are available. Joe Campbell's Crafting C Tools for the IBM PC (Englewood Cliffs, N.J.: Prentice-Hall, 1986) is packed with useful subroutines and programs for the IBM environment. It is distinguished by numerous Notes on C Usage sections that discuss the C programming issues involved in the programs themselves. William J. Hunt's The C Toolbox (Reading, Mass.: Addison-Wesley, 1985) is also packed with useful stuff, including a complete B-tree database management package. It's not as tied into the IBM PC as is Campbell's book. Both of the operating system design books that were reviewed in the December DDJ -Ted J. Biggerstaff's Systems Software Tools (Englewood Cliffs, N.J.: Prentice-Hall, 1986) and Douglas Comer's Operating System Design, the Xinu Approach (Englewood Cliffs, N.J.: Prentice-Hall, 1984)-are good resources. And of course, DDJ itself sells the source code for several large C programs—such as my own MS-DOS shell-on disk.

So, I've just skimmed the surface of what's available and have already spent several hundred dollars of your hard-earned money. Hopefully, you'll find more extensive reviews of some of these books in future issues of *DDJ*, but until then you'll at least have a place to start when you go into a bookstore or library. Good luck.

ISN'T IT A PITY...

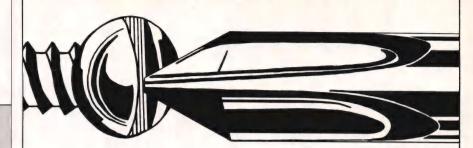

Everything Isn't As Accommodating As

c-tree

r-tree

REPORT GENERATOR

FILE HANDLER

Performance and Portability

For all the time you devote to developing your new programs, doesn't it make sense to insure they perform like lightning and can be ported with ease?

c-tree: Multi-Key ISAM Functions For Single User, Network, & Multi Tasking Systems

Based on the most advanced B+ Tree routines available today, **c-tree** gives you unmatched keyed file accessing performance and complete C Source Code. Thousands of professional C programmers are already enjoying **c-tree**'s royalty-free benefits, outstanding performance, and unparalleled portability.

Only FairCom provides single and multi-user capabilities in one source code package, including locking routines for Unix, Xenix, and DOS 3.1., for one low price! In addition, **c-tree** supports fixed and variable record length data files; fixed and variable length key values with key compression; multiple indices in a single index file; and automatic sharing of file descriptors.

r-tree: Multi-File Report Generator

r-tree builds on the power of c-tree to provide sophisticated, multi-line reports. Information spanning multiple files may be used for display purposes or to direct record selection. You can develop new reports or change existing reports without programming or recompiting and can use any text editor to

create or modify **r-tree** report scripts including the complete report layout. At your option, end users may even modify the report scripts you provide.

Unlimited Virtual Fields; Automatic File Traversal

r-tree report scripts can define any number of virtual fields based on complex computational expressions involving application defined data objects and other virtual fields. In addition, r-tree automatically computes values based on the MAX, MIN, SUM, FRQ, or AVG of values spread over multiple records. r-tree even lets you nest these computational functions, causing files from different logical levels to be automatically traversed.

Unlike other report generators, **r-tree** allows you to distribute executable code capable of producing new reports or changing existing reports without royalty payments, provided the code is tied to an application. Your complete source code also includes the report script interpreter and compiler.

How To Order

Put FairCom leadership in programmers utilities to work for you. Order **c-tree** today for \$395 or **r-tree** for \$295. (When ordered together, **r-tree** is only \$255). For VISA, MasterCard and C.O.D. orders, call 314/450-6833. For **c-tree** benchmark comparisons, write FairCom, 2606 Johnson Drive, Columbia, MO 65203.




Complete C Source Code & No Royalties!

Xenix is a registered trademark of Microsoft Corp. Unix is a registered trademark of AT&T.

CIRCLE 93 ON READER SERVICE CARD

YOUR SYSTEM'S KEY COMPONENT

The Only Magazine By And For Advanced Micro Users.

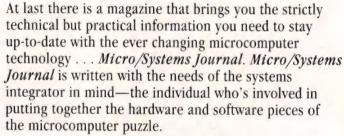

In each issue of *Micro/Systems Journal* you'll find such useful and progressive articles as:

- Interfacing to Microsoft Windows
- · Unix on the PC
- 80386 Programming
- High Resolution PC Graphics
- Using 80286 Protected Mode
- Multiprocessing and Multitasking

You'll get the hands-on, nuts and bolts information, insight and techniques that *Micro/Systems Journal* is famous for . . . in-depth tutorials, reviews, hints . . . the latest information on computer integration, networks and multi-tasking, languages, and operating systems . . . hard-hitting reviews.

To start your subscription to *Micro/Systems Journal*, simply fill out one of the attached cards or write to *Micro/Systems Journal*, 501 Galveston Dr., Redwood City, CA 94063. You'll receive a full year (6 issues) of *Micro/Systems Journal* for just \$20, and enjoy the convenience of having M/SJ delivered to your doorstep each month. Don't wait . . . subscribe today!



MICRO/ SYSTEMS JOURNAL

FOR THE ADVANCED COMPUTER USER

SUBSCRIBE NOW AND

SAVE OVER 15% OFF THE

OFF THE NEWSSTAND PRICE!

Yes! I want to subscribe to Micro/Systems Inventor
Micro/Systems Journal
and save over 15% off the cover price.
☐ 1 Year (6 issues) \$20 ☐ 2 Years (12 issues) \$35
☐ Please charge my: ☐ Visa ☐ MasterCard ☐ American Express
Payment enclosed Bill me later
Card # Exp. date
Signature
Name
Address
City State Zip
Savings based on a full one-year cover price of \$23.70. Canada and Mexico add \$3 for surface mail, \$7 for airmail per year. All countries add \$12 for airmail per year. All foreign subscriptions must be prepaid in U.S. dollars drawn on a U.S. bank. Please allow 6-8 weeks for delivery of first issue. A Publication of M & T Publishing, Inc. 3012
Yes! I want to subscribe to Micro/Systems Journal.
Yes! I want to subscribe to
Micro/Systems Journal
Micro/ Systems Journal.
and save over 15% off the cover price.
☐ 1 Year (6 issues) \$20 ☐ 2 Years (12 issues) \$35
Please charge my: Visa MasterCard American Express
a rouse of the second s
Payment enclosed Bill me later
Card # Exp. date
Signature
Name
Address
City State Zip
Savings based on a full one-year cover price of \$23.70. Canada and Mexico add \$3 for surface mail, \$7 for airmail per year. All countries add \$12 for airmail per year. All foreign subscriptions must be prepaid in U.S. dollars drawn on a U.S. bank. Please allow 6-8 weeks for delivery of first issue.
A Publication of M & T Publishing, Inc. 3012
Yes! I want to subscribe to
Tes. I want to substitute to
Micro/Systems Journal
Yes! I want to subscribe to Micro/Systems Journal and save over 15% off the cover price.
☐ 1 Year (6 issues) \$20 ☐ 2 Years (12 issues) \$35
☐ Please charge my: ☐ Visa ☐ MasterCard ☐ American Express
☐ Payment enclosed ☐ Bill me later
Card # Exp. date
Digital div
Control of the Contro
5.11 and 1997 price of \$23.70. Canada and Mexico add \$3 for surface mail. \$7 for airmail per
Savings based on a full one-year cover price of \$2.5. O. Callada and Medico decoration of the Savings based on a full one-year cover price of \$2.5. O. Callada and Medico decoration of the Savings based on a full one-year cover price of \$2.5. O. Callada and Medico decoration of U.S. dollars drawn on a U.S. bank. Please allow 6-8 weeks for delivery of first issue.

BUSINESS REPLY MAIL

FIRST CLASS PERMIT 790. REDWOOD CITY, CA

Postage Will Be Paid By Addressee

Micro/Systems Journal

Box 3713 Escondido, CA 92025-9843

Halandalllann labababababababababababab

No Postage Necessary If Mailed In The United States

No Postage Necessary If Mailed In The **United States**

No Postage Necessary If Mailed In The **United States**

BUSINESS REPLY MAIL

FIRST CLASS PERMIT 790, REDWOOD CITY, CA

Postage Will Be Paid By Addressee

Micro/Systems Journal.

Box 3713 Escondidio, CA 92025-9843

Halonah III man bibbi bibbi da bahaha bahi da ba



BUSINESS REPLY MAIL

FIRST CLASS PERMIT 790, REDWOOD CITY, CA

Postage Will Be Paid By Addressee

Micro/Systems Journal

Escondidio, CA 92025-9843

Ուհանի II հատ հեն հեն հետև հանդես հանդե

STEPPING

UPWITH

MS-DOS

Taming MS-DOS by Thom Hogan

Taming MS-DOS takes you beyond the basics, picking up where your DOS manual leaves off. You'll learn how to create a memory-resident clock, how to rename subdirectories and change file attributes, how to create AUTOEXEC.BAT files, and how to customize CONFIG.SYS and use ANSI.SYS to change the appearance of DOS. You'll find extensive batch file coverage with example routines that use redirection operators, filters and pipes, and ready-to-use assembly language programs that enhance DOS. Full source code is included.

Taming MS-DOS Taming MS-DOS with disk Item #060 \$19.95 Item #061 \$34.95

On Command: Writing a Unix-Like Shell for MS-DOS

by Allen Holub

This book and ready-to-use program demonstrate how to write a Unix-like shell for MS-DOS, with techniques applicable to most other programming environments as well. The book and disk include a detailed description and working version of the shell, complete C source code, a thorough discussion of low-level DOS interfacing and significant examples of C programming at the system level. Supported features: read, aliases, history and C-Shell-based shell scripts. The Unix-like control flow includes: if/then/else; while; foreach; switch/case; break; continue. For IBM PC and direct compatible's. All source code included on disk.

/Util

When used with the **shell**, this collection of utility programs and subroutines provide you with a fully functional subset of the Unix environment. Utilities include: cat; cp; date; du; echo; grep; ls; mkdir; mv; p; pause; printevn; rm; rmdir; sub; and chmod. Complete source code and manual included.

On Command

Item #163 \$39.95 Item #161 \$29.95

Interfacing to MS-DOS

by William Wong

Originally featured in Micro/Systems Journal, Interfacing to MS-DOS provides ten concise articles that will orient any experienced programmer to the MS-DOS environment. All source code discussed is also contained on disk.

Topics include: program construction, character base input and output functions, and file access. You'll also find a discussion of CP/M style vs. Unix-style DOS file access, sample program files, and a detailed description of how to build device drivers. A device driver for a memory disk and a character device driver are provided on disk with full source code.

Interfacing to MS-DOS

Item #166 \$29.95

NR: An NROFF-like Text Formatter for MS-DOS

NR is a text formatter that is written in C and is compatible with the Unix NROFE. It includes complete implementation of the -ms macro package, and an in-depth description of how -ms works. NR does hyphenation and simple proportional spacing, and supports automatic table of contents generation and indexing, automatic footnotes and endnotes, italics, boldface, overstriking, understriking, and left and right margin adjustment. Also: extensive macro and string capability, number registers in various formats, diversions and diversion traps, input and output line traps. Full source code included. For PC compatibles.

NR

Item #165 \$29.95

To Order: Return this order form with your payment to M&T Books, 501 Galveston Dr., Redwood City, CA 94063 Or, Call **TOLL-FREE 800-533-4372** Mon-Fri 8AM-5PM. In CA call **800-356-2002**.

Name				Item #	Description	Price
Address						
City		State	Zip			
Check enclo	sed. Make Payabl	e to M&T Publishin	g.			
Charge my	□ VISA	☐ M/C	Amer.Exp.		Subtotal	
Card No.					CA residents add sales tax% _	
Exp. Date					Add \$2.25 per item for shipping _	
Signature				_	TOTAL_	
						3127D

Quality of Life Tools

oday's software market is rife with "user-friendly" MS-DOS shells such as the Norton Commander (which incidentally was written by John Socha, not Peter Norton), X-Tree, and KeepTrack. These little rascals allow naive users to navigate through the hierarchical directory structure, copy files, initialize disks, and the like as long as they can find the arrow keys. I suspect that most experienced programmers stav as far away from these programs as I do-user interfaces that clutter up the screen and constantly ask "Are you sure?" just get in the way during the day-long cycles of edit, compile, link, and debug.

Of course, the default MS-DOS command processor (COMMAND.COM) is a long way from the last word in user interfaces, too, and there is certainly a place in programmers' hearts for new shells that can enhance that interface without altering it past recognition. I'd like to discuss briefly two such products this month and solicit information on other such products from DDJ readers and software vendors.

Command Plus

Command Plus is an alternative shell from ESP Software Systems that completely replaces MS-DOS' COMMAND .COM. Command Plus offers significantly enhanced COPY, DEL, and DIR commands and adds a high-performance file BROWSE command, com-

by Ray Duncan

mand aliasing, the ability to accept multiple commands on the same line (separated by & delimiters), command logging, and a directory stack. It also includes an extensive shell programming language called SCRIPT that is upward compatible from the normal MS-DOS batch file commands.



SCRIPT supports integer, long integer, and string variables; various operations on those variables; sophisticated control structures, such as CASE; keyboard input into a string variable: cursor positioning; and a bevy of operations on environment variables and file names, extensions, dates, and attributes.

But for me, the two most useful features of Command Plus are its support for the command history and for regular expressions. Plain vanilla MS-DOS allows you to specify sets of files with the wildcard characters * and ?. Command Plus' regular expressions give you much more flexible control over file names, with the ability to specify or exclude single characters or ranges of characters in any position. The file specification [abcd4-9]*.asm, for example, matches any file with the extension .asm and whose name begins with one of the letters a through d or with one of the numerals 4 through 9.

The history feature of Command Plus pushes each command onto a history list as it is entered. The default size of this list is 10 commands (the oldest one is simply lost as each new command is entered), but you can configure it to hold as many as 48 commands.

You can recall and display a previous command by using the arrow keys to traverse the list, edit the command if necessary, then press the Enter key to carry out the command again. For example, if four commands ago you entered:

LINK FOO,,,,SLIBW + LIBH,FOO.DEF

and you want to repeat the same link with a different library, you would just hit the up arrow four times to redisplay the original LINK command, move to the position to be changed with the left and right arrow keys, type the new library name, and hit Enter. Incidentally, more editing functions are available than in normal MS-DOS (such as word tabbing right or left), and the editing keys are configurable. You can also view the entire history list and select old commands for editing by their number on the list if you wish. I have found that the history feature saves hundreds of keystrokes and mistyped commands daily.

Now, I know Unix partisans are going to write in and tell me once again that Unix shells have had these features since the Dark Ages. I am aware of this already, I too am pleased that Unix has at least one or two redeeming features, and I'll be the first to agree that Unix software comes from the Dark Ages. But it's nice to have histories, regular expressions, and a decent script language without having to sacrifice a megabyte of RAM, 10 megabytes of fixed disk, and half my CPU cycles on the altar of Unix.

The only significant deficit I see in the current release of Command Plus is the lack of support for replaceable parameters in command aliases. We can always hope that the vendor will see fit to add this in a future version! You can obtain more information on Command Plus from ESP Software Systems Inc., 11965 Venice Blvd., Ste. 309, Los Angeles, CA 90066; (213) 306-7408.

Proced

Proced, written by Chris Dunford, is an extremely powerful commandline editor for MS-DOS. It is loaded as a Terminate and Stay Resident (TSR) utility and is not a complete replacement for COMMAND.COM. What it

does offer is vastly improved command-line editing, support for synonyms (aliases) with replaceable parameters, command chaining. command logging, and inspection/ recall/editing of previous commands via a history list similar to that described earlier for Command Plus (note that ProCED predates Command Plus by a considerable margin, however). Nearly all ProCED's special characters, buffers, and stacks are configurable by the user, and lists of synonyms and other configuration information can be automatically loaded from a file at system start-up.

ProCED works by capturing and replacing the MS-DOS buffered keyboard input function (int 21h, function Oah); therefore, its capabilities are available in any MS-DOS program that performs its input through this function, including most debuggers. By the same token it does not work with some programs, such as the Norton Commander, that perform their keyboard input character character.

A particularly nice aspect of Proced is that it contains "hooks" that allow programmers to write and install new memory-resident commands, called "user commands." These are loaded under the control of ProCED-like miniature TSRs and behave as though they were COMMAND .COM "intrinsic" commands. The Proced package includes several examples, including ATTRIB (displays or alters file attributes), CDIR (a sorted directory), and SEND (transmits an arbitrary string of data to any file or device).

Chris recently sent me a development (prerelease) version of ProCED that has two terrific new features. The first is called command extrapolation: if you type a few letters of a command and then press Ctrl-X (^X), ProCED searches the history buffer for the first matching command and displays it for editing. If it doesn't find the one you want, you simply hit 'X repeatedly until the command you desire appears. The second new feature is a built-in file-name search, which is similar to command extrapolation.

At any point in a command line, you can type a partial file specification, or a file name that contains wildcards, and then press the Tab

PC/VITM

UNIX's VI Editor Now Available For Your PC!

Are you being as productive as you can be with your computer? An editor should be a tool, not an obstacle to getting the job done. Increase your productivity today by choosing **PC/VI**—a COMPLETE implementation of UNIX* VI version 3.9 (as provided with System V Release 2).

PC/VI is an implementation of the most powerful and most widely used full-screen editor available under the UNIX operating system. The following is only a hint of the power behind **PC/VI**:

- Global search or search and replace using regular expressions
- · Full undo capability
- Deletions, changes and cursor positioning on character, word. line, sentence, paragraph, section or global basis
- Editing of files larger than available memory
- Shell escapes to DOS
- · Copying and moving text
- · Macros and Word abbreviations
- Auto-indent and Showmatch
- MUCH, MUCH MORE!

FOR

Don't take it from us. Here's what some of our customers say: "Just what I was looking for!", "It's great!", "Just like the real VI!". "The documentation is so good I have already learned things about VI that I never knew before." - IEEE Software, September 1986.

PC/VI is available for IBM-PC's and generic MS-DOS[†] systems for only \$149. Included are CTAGS and SPLIT utilities, TERMCAP function library, and an IBM-PC specific version which enhances performance by as much as TEN FOLD!

C/TOOL

What makes UNIX so powerful? Sleek, Fast, and POWERFUL utilities! UNIX gives the user not dozens, but hundreds of tools. Now the most powerful and popular of these are available for your PC! Each is a complete implementation of the UNIX program. Open up our toolbox and find:

 BANNER DIFFH PASTE · BFS · DIFF3 PR STRINGS GREP RM TAIL **CHMOD** · HEAD SED TR TOUCH MAKE SEE · DIFF SORT · WC . OD

All of these for only \$49.00; naturally, extensive documentation is included!

Why settle for a spelling checker which can only compare words against its limited dictionary database when PC/SPELL is now available? **PC/SPELL** is a complete implementation of the UNIX spelling checker, renowned for its understanding of the rules of English! **PC/SPELL** determines if a word is correctly spelled by not only checking its database, but also by testing such transformations as pluralization and the addition and deletion of prefixes and suffixes. For only \$49.00, PC/SPELL is the first and last spelling checker you will ever need!

Buy PC/VI and PC/TOOLS now and get PC/SPELL for only \$1.00! Site licenses are available. Dealer inquiries invited. MA residents add 5% sales tax. AMEX, MC and Visa accepted without surcharge. Thirty day money back guarantee if not satisfied! Available in 51/4", 31/2" and 8" disk formats. For more information call today! *UNIX is a trademark of AT&T. *MS-DOS is a trademark of Microsoft.

CUSTOM SOFTWARE SYSTEMS P.O. BOX 678 . NATICK, MA 01760 617 • 653 • 2555



16-BIT (continued from page 119)

key to have ProCED replace the tentative file spec with matches from the current directory. You can also move to a new directory by pressing the space bar when a directory name appears and then press the Tab key again to see further file names. Command extrapolation and file-name search will be present in the next retail version of ProCED, which may be available by the time you read this.

Time for a testimonial: I have been using ProCED for at least a year and wouldn't want to live without it. I even carry a copy of it with me on a floppy disk when traveling, so I won't feel deprived when using someone else's PC! ProCED is available from the Cove Software Group, P.O. Box 1072, Columbia, MD 21044; (301) 992-9371.

80286 Resources

In a recent column, I mentioned the book *Inside the 80286* (by Ed Strauss, published by Waite Group/Brady) as an excellent source of information on the 80286's protected mode, virtual memory management, task switching, and interrupt handling. *DDJ* readers have also brought to my attention the following book:

Morse, Stephen P.; and Albert, Doug-

las J. *The 80286 Architecture*. New York: Wiley, 1986. 279 pages including index. ISBN 0-471-83185-9.

The architectural and systems-level discussion that occupies nearly all of Strauss' book is compressed into about 40 pages here. Most of the remainder of the book is a primer on the 80286's opcodes and addressing

I have been using ProCED for a year, and I wouldn't want to live without it,

modes, including the traditional explanation of bits, bytes, and hex arithmetic and some rehashed tables from Intel manuals. The last chapter of the book is entitled "286 Hardware: Building a Computer," but its discussion is generic and somewhat vague whereas in Strauss' book the hardware discussion is extremely specific and includes schematics and software listings that you could use to breadboard your own primitive 80286 machine. All in all, although

Morse and Albert's credentials are good, I don't think this book makes the grade. I'd recommend you spend your money on Strauss' book and a copy of the Intel 80286 Programmer's Reference instead.

Pretty Pictures Department

I suspect at least half of the readers of this column reacted to the Scientific American article on Mandelbrot sets by writing their own programs to plot these intriguing images. Most of us, however, also found that plots in the 350-line, 16-color modes of the EGA take nearly forever unless the program is painstakingly optimized. Relax, someone else has done the work! A slick, fast program to plot Mandelbrot images, called Fractal-Magic-EGA, is available for \$25; the source code (Turbo Pascal) is also available for an additional \$50. Contact Sintar Software, P.O. Box 3746, Bellevue, WA 98009; (206) 455-4130.

Performing SETs from a Program

Daniel Briggs of the Solar Astronomy Department at CalTech, writes: "Someone recently wanted to know about how to change directories in a batch file and then return home again. There are several different approaches, but here's the one I took.

"The GETDIR.ASM program [Exam-

Introducing Periscope" III

A new generation of debugging for the IBM PC, XT, AT and close compatibles

Now you can invest \$995 and get the most powerful debugging tool available short of a \$10,000 in-circuit emulator! The Periscope III board's hardware breakpoints and real-time trace buffer help you solve the really tough debugging problems. If you ever deal with errors in real-time systems, intermittent failures, interfacing with undocumented systems, or bottlenecks in your code, Periscope III may be just what you need!

Call TOLL-FREE 800/722-7006 for more information.

The **PERISCOPE** Company, Inc.

14 Bonnie Lane • Atlanta, GA 30328 • 404/256-3860

ple 1, right] illustrates a means of providing string functions to batch files. In this case, the program SETs the value of the environment variable DIR to be the current default directory. This value can then be referenced later in a batch file in the form %DIR%. The undocumented hook into the current copy of the command processor, int 2eh, is used to do the SET-somewhat unportable but by far the best method among the various alternatives. This program can be altered easily for other uses by changing the value at var_name to the desired variable name and the function get_value to the desired string function.

"With the GETDIR program in hand, you can write sequences such as this in batch files:

get-dir ! equivalent to "set
DIR = < current
directory>"
cd < somewhere else>
< do stuff>
cd %DIR% ! % < variable name > %
replaced by its value

"The GETDIR approach has the disadvantage that it cannot be nested. There is a set of shareware utilities out that includes the programs PUSH-DIR and POPDIR, which do what they sound as though they do. Try a local BBS; they're fairly common. I like my approach, though, because it provides a simple means of adding any string function that you can dream up into a batch file."

Availability

All the source code for articles in this issue is available on a single disk. To order, send \$14.95 to *Dr. Dobb's Journal*, 501 Galveston Dr., Redwood City, CA 94063 or call (415) 366-3600 ext. 216. Please specify the issue number and disk format (MS-DOS, Macintosh, Kaypro).

DDJ

Vote for your favorite feature/article. Circle Reader Service No. 6.

```
: GETDIR.ASM --- set environment variable DIR - current directory path
   Copyright (C) 1986 Daniel Briggs
  This program illustrates a means of providing string functions to batch files. In this case, the program will set the value of the environment variable DIR to be the current default directory. This value can then be referenced later in a batch file by using the phrase *DIR*. The undocumented hook into the current copy of the command processor, int 2eh is used to do the set.
  To assemble, link, and convert to an executable COM file:
           MASM GETDIR;
LINK GETDIR:
           EXE2BIN GETDIR.EXE GETDIR.COM
stk size
                                   1000h
                       egu
                                                           ;a good healthy stack
cseq
                       segment para public 'CODE'
                       assume cs:cseq, ds:cseq, ss:cseq, es:cseq
                       org
label
                                   2ch
env_ptr
                                   near
                                                           : points to local environment
                                   100h
                       org
label
                                                           ; skip to the end of the PSP
DOS entry
                       1mp
                                   set str
                                   0, 'set '
parameter
                       db
                                                           start of command to be passed
                                                           counted string name; buffer for variable value
var_value
                       db
                                   80 dup (?)
ISP
                       du
                                   offset end code + stk size
set str
                       proc
                                   Dear
                                                           ;addressing already set by loader ;set stack pointer
                                   ap, isp
                       mov
                                   si, offset var value
                                                           :fill value with desired string
                       call
                                   get_value
                       mov
                                   al. 0
                                   cx, -1
di, offset parameter+1
                       MOV
                        mov
                                                                         find the null
                                scasb
                        repne
                        dec
                                                                         point to it
                                   byte ptr ds: [di], Odh
                       MOV
                                                                          create count byte
                                   parameter, cl
                       mov
                                   bx, isp
                       mov
                                                           :top of program
                                   bx, cl
                        inc
                                   bx
                                                           :es already set appropriately ; shrink down to memory needed
                                   ah.
                                         4ah
                        int
                                   21h
                                         offset parameter
                        int
                                   2eh
                                                           ; invoke the command processor
                        push
                                   CB
                                                           reset stack
                        pop
                                   sp. 15P
                                                           ; put the stack pointer back
  Can you find a means of getting a status back from this technique?
                                         4dh
                       int
                                                           :get the returned status < **wrong **>
                       MOV
                                   ah, 4ch
21h
                                                           :terminate w/status
set str
                        endo
comment
                       This is the routine that actually sets the value of the string. In this example, it sets the buffer pointed to by DS:SI to the current pathname. What ever string is set must be terminated by a null. The procedure assumes that the buffer starts initialized to 0s, so does not add the final null.
                                    byte ptr ds:[si], '\' ;not provided by DOS
get value
                        proc
                        inc
                                    ah, 47h
                        mov
                        mov
                                    dl,
                                    di, si
21h
                        mov
                        int
                                                                        ; get current directory
get value
                        endo
end code
                        label
                                    near
                        ends
cseq
                                   DOS entry
                        end
```

Example 1: Providing string functions to batch files

"Dick Johnson in accounting is having a heart attack!"


Would you know what to do? Would anyone in your company be able to help?

One of your employees is stricken. Breathing and heartbeat have stopped. Does anyone know what to do until help arrives?

The American Red Cross can train your employees in CPR—Cardio-pulmonary Resuscitation, a first aid method that sustains life.

It's just one of the ways the Red Cross helps you keep your company healthy and safe.

Contact your local Red Cross Chapter and ask about CPR training. That way, when disaster strikes, you can all breathe a little easier.



Professional Programming Products



by BCSoft

FREE

PC-WRITE™ text editor with every purchase.

PROGRAMMERS AND SOFTWARE DEVELOPERS - LOOK AT THESE PRODUCTS!

Quick-Tools[™] for QuickBASIC[™] users!

- A comprehensive library of over 90 subroutines and functions directly CALLable from your QuickBASIC programs.
- SORT routines allow sorting of single and multidimensional arrays.
- · Binary search functions.
- Unique screen handling functions allow splitting screens, fast scrolling, special string printing, character attribute control, phantom cursors, etc.
- Keyboard scanning and status calls, with field inputing and decoding. On screen editing of input fields.
- Unique file handling routines.
- · FREE Updates and phone support!
- · Plus much, much more!

Only \$129.95 Complete

TURBO.ASM™ For Turbo PASCAL users!

- A unique programming tool which is a must for every Turbo Pascal user. The only package designed for interfacing assembly language with Turbo Pascal.
- Outlines several different ways to add assembly language routines to Turbo programs, some without effecting your code space.
- Fully explains the internal workingsof Turbo Pascal and data passing methods.
- Includes a library of Assembly routines which can be used directly from Turbo Pascal.
- · The best way to learn assembly language.
- · FREE Updates and phone support!

Only \$99.95 Complete

NET-TOOLS™ NETBIOS Programming Tools

- NET-TOOLS allows you to write programs for ANY NETBIOS compatible local area network fast and easily. CALLable from Microsoft Assembler, C, PASCAL, or FORTRAN.
- · Add and Delete local names.
- Initiate and Cancel sessions. Just give NET-TOOLS
 the name of the computer you would like to call,
 and it will automatically locate the user and make
 the connection for you.
- Transfer Messages with automatic retries and error detection. Both the datagram and session protocols.
- Redirect Local Devices simply and easily with a single function call.
- · Plus much MORE!
- Complete SOURCE CODE is provided, FREE!
- FREE Updates and phone support!

ONLY \$149.00 Complete

ASMLIB™

The Programmer's Library

- A set of over 210 subroutines to greatly increaseyour productivity. Written in assembly language and directly CALLable from Microsoft Assembler, C,PASCAL, and FORTRAN.
- · Complete SOURCE CODE provided -FREE!
- Text WINDOWing functions allow up to 64 overlapping windows.
- TERMINATE and STAY RESIDENT programs arewritten easily. Programs can "POP UP" with a simplekeystroke. Use DOS calls from them, also.
- GRAPHICS on the EGA, CGA, and Hercules™ Monochrome.
- · Virtual file functions.
- Full FLOATING POINT math and trig with 8087 support.
- Int. driven async. support, plus MUCH MORE! Only \$149.00 Complete.

NO ROYALTIES REQUIRED

To ORDER call or write to:

BC Associates
A division of BCSoft Corporation
3261 N. Harbor Blvd.
Suite B
Fullerton, CA. 92635



VISA, M/C, or COD orders are welcome!



CALL TOLL FREE

1-800-262-8010

in CA. dial 1-714-526-5151

STRUCTURED PROGRAMMING

True BASIC Challenges Modula-2

In this issue I will discuss the implementation of modules in Version 2 of True BASIC, present two True BASIC modules, and compare True BASIC's modules with those of Modula-2.

The dichotomous nature of True BASIC is marked by the support of structured code on one hand and the lack of structured data on the other. Modules as well as external libraries seem to add more code structure constructs. The fact that they help create reusable software libraries is welcome as an effective timesaving tool and the implementation of modern software engineering methodology.

When I first heard about modules in True BASIC, I asked the technical staff at True BASIC Inc. how different they were from external libraries. They answered by pointing out that modules offer better control over exported routines and a more advanced data interface. You can access all the routines in a library, and in addition, the local variables in library routines are invisible to other routines both inside and outside the library. This means that the argument list is the main path for sharing data, aside from using temporary data files.

Modules modify the interaction of routines and data by supporting the following sections:

- MODULE <name>
- PUBLIC < list of exported variables

by Namir Clement Shammas

and arrays>

- PRIVATE < list of unexported routines>
- DECLARE DEF < list of functions>
- SHARE < list of variables and arrays common among the module routines only>
- module initialization code



- · functions and procedures
- END MODULE

The *PUBLIC* declaration is used to list the names of scalar variables and arrays that are exported to client programs. This makes public variables global and accessible to all parts of the module as well as to the program that calls the module.

The *PRIVATE* declaration lists the functions and procedures that are local to the module. Compared to Modula-2, this is the reverse of the *EXPORT* list. All routines that are not listed as private can be called by client programs.

The *DECLARE DEF* statement indicates the names of all the functions defined inside the module.

The SHARE declaration lists the scalar variables and arrays that are accessible to all the module routines but not to the client programs. They need not and should not appear in the routines' argument lists. The additional advantages of shared variables are:

- 1. They support data abstraction by enabling the access of data structures while hiding the details.
- 2. Shared variables are static: they retain their values between calls to routines in the module.
- No conflict results from using the same variable names in a client program or shared variables in other routines.

Module initialization is carried out automatically before the program starts running. This means that any PUBLIC variable involved in the initialization step must be assigned an initial value from within the module itself, which makes the initialization step independent of the client programs.

The new version of True BASIC has a powerful *LOAD* command, which enables you to load libraries and modules and so extend the True BASIC language. Loading a library that implements hyperbolic functions, for example, enables you to type (in the command mode) *PRINT SINH(2.4)* and obtain a result. The loaded libraries and modules cut down on the time required to link programs with external libraries and modules.

Examples

I will now discuss two examples of True BASIC modules. Example 1, page 125, contains a linear regression module. The *PUBLIC* declaration exports the three statistics slope, intercept, and coefficient of determination. The *PRIVATE* statement declares routines *Mean* and *Sdev* as local to the module. *DECLARE DEF* points out that *Mean* and *Sdev* are local functions used to calculate the mean and standard deviation for intermediate results. The *SHARE* statement lists the statistical summations as shared static variables.

The call to *InitializeSum* is the first statement in the module initialization section. It is followed by assigning numeric codes for missing data to the three regression statistics. These values can be used by the client program to detect that no meaningful results are available and so distinguish them from random junk data.

The *InitializeSum* subroutine is used to zero the statistical summations—this is carried out automatically when the program starts running. For the sake of clarity, I called the subroutine from the program. Subroutine *AcumData* takes data from

the two arrays *X* and *Y* and updates the summations. Your program can call it repeatedly to process data in batches. Since the summations are static variables, they maintain their values between calls. Thus, when calling *LineFit*, the summations supply the required information to calculate the regression statistics.

Example 2, page 126, shows a simple True BASIC program that uses the regression module. The *LIBRARY* keyword is used to import it, and *DE-CLARE PUBLIC* is used to import the public variables exported by the regression module. Notice that the statistical summations are invisible to the client program. If I want to write a version that uses an external True BASIC library, I must pass the summations in the argument lists. Calling *LineFit* involves no parameters because I have elected to make the results public.

My second example involves sorting and indexing an array of strings. In writing the program I made certain choices to demonstrate several features of True BASIC modules. Example 3, pages 128-129, shows module Sort. The PUBLIC statement indicates that the module declares the array Item\$() and the array counter NData as globally accessible to client programs. The SHARE declaration lists two arrays: the first is an array of pointers; the second is an index table. These arrays are shared within the routines of the module. The module initialization consists of assigning values to shared variables.

The *Sort* module consists of three exported routines. The first one ensures that the sizes of public array *Item\$()* and the shared pointer array are adequate. The *REDIM* statement (one of the new features in True BASIC, Version 2) expands the arrays as needed. The size of the index table is independent of the size of array *Item\$()*. It maps indices for the characters A through Z in uppercase only.

Subroutine Sort_and_Index performs two tasks: it sorts the array Item\$() using pointers and then sets up an index table. It calls the local subroutine ShellSort to perform a pointer-based Shell sort on array Item\$(). The second local subroutine, Set_Index, is called to set up array Table(). The first entry encountered

starting with the letter *A* is stored in location 1 of array *Table()*, that of *B* in location 2, and so on. The table index is initialized with 0s.

Function Search_Index is used to search for a specific occurrence of a string and returns the index of array Item\$() or 0 if not found. Using the index table, this function is able to zoom in on a feasible search range, knowing where to start and stop.

Example 4, page 130, shows a cli-

ent program that uses module *Sort*. It contains *DATA* statements that supply the array *Item\$()* with some keywords from the Pascal language. The *DO...WHILE* loop counts the number of items in the *DATA* statements. A dummy string is used, instead of the *Item\$()* array, for the *READ* statement to avoid a possible array-bound error. The *RESTORE* statement resets the *DATA* statement pointer. The program calls for sub-

```
MODULE Regress
! Simple linear regression module
PUBLIC Slope, Intercept, Rsgr ! Global variables
PRIVATE Mean, Sdev ! Routines local to module only
DECLARE DEF Mean, Sdev
SHARE Sum, SumX, SumX2, SumY, SumY2, SumXY ! static local variable
                    - Initialize module ----
CALL InitializeSum
!---- module routine definitions -----
def Missing = -1.0E+200
sub InitializeSum
! Set statistical summations to zero
let Sum, SumX, SumX2 = 0
let SumY, SumY2, SumXY = 0
let Slope, Intercept, Rsqr = Missing
end sub
sub AcumData(X(), Y(), NData)
! Subroutine to accumulate stat summations
FOR I = 1 TO NData
    let Xt = X(I)
    let Yt = Y(I)
   let Sum = Sum + 1
    let SumX = SumX + Xt
   let SumY = SumY + Yt
    let SumX2 = SumX2 + Xt * Xt
    let SumY2 = SumY2 + Yt * Yt
    let SumXY = SumXY + Xt * Yt
NEXT I
end sub
!---- define internal functions ----
def Mean (A,B) = A / B
def Sdev (Sum2, Sum, N) = SQR((Sum2 - Sum^2/N)/(N-1))
sub LineFit
let MeanX = Mean (SumX, Sum)
let MeanY = Mean (SumY, Sum)
let SdevX = Sdev (SumX2, SumX, Sum)
let SdevY = Sdev(SumY2, SumY, Sum)
! calculate sought regression results
let Slope = (SumXY - MeanX * MeanY * Sum) / SdevX^2 / (Sum - 1)
let Intercept = MeanY - Slope * MeanX
let Rsqr = (SdevX / SdevY * Slope)^2
end sub
END MODULE
```

Example 1: True BASIC source code for linear regression module

```
! PROGRAM Regress demonstrates calling module "regress"
OPTION BASE 1
                - Module declarations --
Library "REGRESS.MDL"
DECLARE PUBLIC Slope, Intercept, Rsgr
DIM X(100), Y(100)
let MAX DATA = 100
CLEAR ! clear screen
   INPUT PROMPT "Enter number of data points " : NData
   PRINT
LOOP UNTIL (NData > 2) AND (NData <= MAX_DATA)
FOR I = 1 TO NData
  PRINT "For data point # "; I
  INPUT PROMPT "
                     enter X "
  INPUT PROMPT "
                     enter Y " : Y(I)
  PRINT
NEXT I
Call InitializeSum ! initialize stat summations
Call AcumData (X, Y, NData)
Call LineFit
PRINT USING "Rsqr = #.#####" : Rsqr
PRINT USING "Slope = +#.#####*^^^"
                                         : Slope
PRINT USING "Intercept = +#.##### : Intercept
```

Example 2: True BASIC source code for application program using the regression module in Example 1

The C Programmer's Assistant

C TOOLSET

UNIX-like Utilities for Managing C Source Code

No C programmer should be without their assistant — C ToolSet. All of the utility programs are tailored to support the C language, but you can modify them to work with other languages too.

Source code in standard K&R C is included; and you are welcome to use it with any compiler (UNIX compatible) and operating system you choose.

12 Time Savers

DIFF - Compares text files on a line-by-line basis; use CMP for byte-by-byte. Indispensable for showing changes among versions of a program under development.

GREP - Regular exp. ssion search. Ideal for finding a procedural call or a variable definition amid a large number of header and source files.

FCHART - Traces the flow of control between the large modules of a program.

PP (C Beautifier) - Formats C program files so they are easier to read.

CUTIL - A general purpose file filter.

Requires MSDOS and 12K RAM

CCREF - Cross references variables used within a program.

CBC (curly brace checker) - checks for pairing of curly braces, parens, quotes, and comments.
Other utilities include DOCMAKE, ASCII, NOCOM, and PRNT.

Source code to every program is included!

Thorough User Support Text and Online

C ToolSet documentation contains descriptions of each program, a listing of program options (if any), and a sample run of the program. On-line help gives you information on the programs and how to run them. Most of the programs respond to -? on the command line with a list of options.

Call 800-821-2492 to order C ToolSet risk-free for only \$95.



335-D Washington St., Norwell, MA 02061 (617) 659-1571 Full refund if not says

CIRCLE 152 ON READER SERVICE CARD

STRUCTURED PROGRAMMING (continued from page 125)

routine Set_Up in the module Sort. This ensures that the public array Item\$() and the pointer array (local to the module) have enough spaces. The RESTORE statement is followed by a FOR... NEXT loop to read the DATA statements into array Item\$(). The module subroutine Sort_and_Index is invoked to prepare the index table. I included a DO... UNTIL loop to enable you to type in the Pascal keywords and find their location in array Item\$().

The second example illustrates data hiding by using static shared arrays within the *Sort* module. The array of pointers and index table remain invisible to the client program. The limitation of shared variables is that there can be only one instance of each variable. To use them as arguments, the module must include routines to store, recall, and manage the shared arrays to simulate and handle multiple instances.

True BASIC vs. Modula-2

How do True BASIC modules compare with those of Modula-2? Here are some comparison aspects:

- Using modules in True BASIC is optional. The core implementation has enough constructs to enable you to avoid using modules altogether if you write all the software you use. Attempting the same type of independence is impossible with Modula-2, in which the core language is much smaller and requires you to use modules for common operations such as I/O and string handling.
- In Modula-2, a library module consists of two components: a definition module and an implementation module. Modules in True BASIC are contained in one file. The difference comes from the language design philosophy. Modula-2 is aimed at large advanced software projects involving teams of programmers. In a topdown software project, the specifications of each module must first be determined, hence the need for a definition module that declares module specifications. Modula-2 libraries can be distributed with the source code for the definition module and the symbol, link, and other files for

The Tele Operating System Toolkit

The unique features of this four part, multitasking operating system will allow you to fully exploit the power of any 8086-based machine! Tele is written in C and assembly language for IBM PC compatibles and includes preemptive multitasking capabilities and an unlimited number of tasks. Tele contains full C and Assembler source code, as well as precompiled libraries. It is compatible with MS-DOS, Unix, and the MOSI standard. MS-DOS disk format.

SK: The System Kernel includes the most crucial part of the Tele Operating System - the preemptive multitasking algorithm. **SK** also contains an initialization module, general purpose utility functions for string and character handling, format conversion, terminal support and machine interface, along with a real-time task management system. All other components require SK: The System Kernel.

SK


Item #090


\$49.95

DS: The Display Driver contains BIOS level drivers for a memory- mapped display (the fastest way to display data), window management support and communication coordination between the operator and tasks in a multitasking environment. **DS** includes functions to create and delete virtual displays, and functions to overlay a portion of a virtual display on the physical display.

An unlimited number of virtual displays can belong to any particular task, and an unlimited number can be in the system at any time. Requires SK: The System Kernel.

DS Item #091 \$39.95

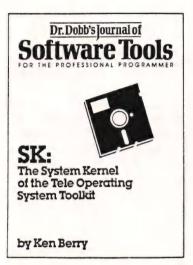



Return this order form with your payment to M&T Books, 501 Galveston Dr., Redwood City, CA 94063 Or, Call TOLL-FREE 800-533-4372 Mon-Fri 8AM-5PM. In CA call 800-356-2002.

YES!

Please send me: Item #090 SK: The System Kernel \$49.95

Item #091 DS: The Display Driver \$39.95

Subtotal

CA Residents add tax ____ % ____

Add \$2.25 per item for shipping

TOTAL .

Charge my VISA

A [

Amer. Exp

Card # _____

M/C

_____ Exp. ____

Name____

Address ____

Address

State

3127C

STRUCTURED PROGRAMMING (continued from page 126)

the implementation module. In True BASIC, if you use the run-time package to form .EXE files, you must supply separate documentation. True BASIC module developers can agree on using .DEF files that have routine headings and comments.

- You can include True BASIC modules after the END statement of a main program. In Modula-2, modules are always in separate files.
- In True BASIC's *PUBLIC* declaration, variables are exported in a way similar to having variables listed in the Modula-2 *EXPORT* list. True BASIC does not export data types (transparent or opaque), however, because it does not support Pascal-like data structures.
- The *PRIVATE* declaration is needed in True BASIC to specify local routines because they coexist with the exported ones.
- · Shared variables in True BASIC modules are somewhat similar to variables in nested local modules in Modula-2 (that is, a module library using a local module). Both types of variables are static and retain their values between successive calls to the modules. Shared variables in True BASIC are more flexible, however, because their scope extends throughout the module. In Modula-2, the static variables in a local module have a scope confined to the local module. This gives True BASIC shared variables the best of both worlds: static variables that are accessible to all the module's
- Module initialization is similar for True BASIC and Modula-2.
- In Modula-2 you are able to resolve the problem of duplicated exported identifiers (variables and routines) more easily. You *IMPORT* the entire modules and use the dot notation to tell the compiler exactly which routine to use. Suppose, for example, that you have obtained a new I/O module (call it *NewIO*) and you want to import the procedure *Write-String()*. At the same time you need to use *WriteString()* from the standard module *InOut*. You simply import both modules using:

IMPORT NewIO; IMPORT InOut;

```
MODULE Sort
 PUBLIC Item$ (100), NData ! Global array and variable
 PRIVATE Set Up, ShellSort ! Routines local to the module
 DECLARE DEF Search Index
 SHARE Ptr (100), Table (26), FALSE, TRUE, HI CHAR, MAX DATA
             ----- Module initialization -----
 let TRUE = 1
 let FALSE = 0
 let HI CHAR = 26
 let MA\overline{X} DATA = 100
  !----- Routines definition -----
 sub Set Up
  ! Make sure that the arrays have enough space
 IF NData > MAX_DATA THEN ! adjust array sizes if needed
     MAT REDIM Item$ (NData)
    MAT REDIM Ptr (NData)
 END TE
 end sub
 sub Set_Index
 ! Build index table
 MAT Table = ZER ! Initialize array
 FOR Char Index = 1 TO HI CHAR

let C$ = CHR$ (64 + Char Index) ! --> 'A' to 'Z'

IF Char Index = 1 THEN ! Start searching at the beginning
          let Index = 1
           ! Seach backwards
          let Index = 1 ! assume worst case as default
          let J = Char Index ! use J as copy of index I
        DO WHILE J > 1
             IF Table (J-1) > 0 THEN ! found good 'last index'
                 let Index = Table (J-1)
                 let J = 0 ! zero to exit loop
                 let J = J - 1! one step backward
             END IF
        LOOP
    END IF
    let Found = FALSE
    DO WHILE (Index <= NData) AND (Found = FALSE)
        let J = Ptr(Index)
        let S$ = Item$(J)[1:1]
IF S$ = C$ THEN! Match found
             let Found = TRUE
             let Table (Char Index) = Index ! store entry index
             let Index = Index + 1 ! increment index for more search
        END IF
    LOOP
NEXT Char Index
end sub
1----
sub ShellSort
! Sort the pointers and keep Item$() unchanged
! Initialize pointers
FOR I = 1 TO NData
    let Ptr(I) = I
NEXT I
  Start the Shell sort
let Offset = NData
                                                    (continued on next page)
```

Example 3: True BASIC source code for module Sort

Whenever you want to write a string using the NewIO version, you write NewIO.WriteString(), and to use that of InOut, you write InOut.Write-String(). Of course, this forces you to use the dot notation with every identifier imported from NewIO and

InOut. Alternatively, you can use the familiar import list for the most used module and keep using the dot notation for the other ones.

In True BASIC modules, a conflict is present on two levels: public variables and exported routines. True BA-

```
DO WHILE OFFSET > 1
      let Offset = INT (Offset / 2)
          let InOrder = TRUE
          FOR J = 1 TO (NData - Offset)
               let I = J + Offset
               IF Item$(Ptr(I)) < Item$(Ptr(J)) THEN
                    let Tempo = Ptr(I)
                    let Ptr(I) = Ptr(J)
                    let Ptr(J) = Tempo
                    let InOrder = FALSE
          NEXT J
     LOOP UNTIL InOrder = TRUE
LOOP
end sub
sub Sort and Index
CALL Set Index
CALL ShellSort
end sub
def Search Index (Datum$, Occur)
  Search for the n th Occur(ance) of Datum$ in array Item$()
! Use index table for faster search
let S$ = UCASE$ (Datum$[1:1]) ! pick first character in Datum$
let Index = Ord(S$) - 64 ! Get index for search table
let Table Index = Table(Index) ! get index entry
let Occurance = ABS(INT(Occur)) ! assign Occur to local copy
IF Table Index > 0 THEN ! Yes there is an entry! let \overline{F}ound = FALSE
    let More Loop = TRUE
    DO WHILE (Table Index <= NData) AND (Found = FALSE) AND
                                                (More_Loop = TRUE)
         let J = Ptr(Table_Index) ! store pointer in J
         IF Datum$ = Item$(J) THEN ! found a match
    let Occurance = Occurance - 1 ! Decrement occurance count
              IF Occurance < 1 THEN ! Yes, this the one we want!
                   let Found = TRUE
                   let Search_Index = Ptr(Table Index)
              ELSE ! No! keep searching!
                   let Table Index = Table Index + 1
              END IF
         ELSE ! Should we keep searching?
              IF S$ = Item$(J)[1:1] THEN
                  let Table Index = Table Index + 1
              ELSE ! No, we are have gone too far and not found a match
                  let More_Loop = FALSE ! stop looping
let Search_Index = 0 ! search has failed
             END IF
         END IF
    LOOP
ELSE
    let Search Index = 0
END TE
end def
END MODULE
```

Example 3: Continued

C & PASCAL PROGRAMMERS

Blaise Computing provides a broad range of programming tools for Pascal and C programmers, with libraries designed for serious software development. You get carefully crafted code that can be easily modified to grow with your changing needs. Our packages are shipped complete with comprehensive manuals, sample programs and source code.

C TOOLS PLUS

\$175.00

NEW! Full spectrum of general-purpose utility functions; windows that can be stacked, removed, and accept user input; interrupt service routines for resident applications; screen handling including EGA 43-line text mode support and direct screen access; string functions; and DOS file handling.

PASCAL TOOLS/TOOLS 2

\$175.00

Expanded string and screen handling; graphics routines; easy creation of program interfaces; memory management; general program control; and DOS file support.

VIEW MANAGER

\$275.00

Complete screen management; paint data entry screens; screens can be managed by your application program; block mode data entry or fieldby-field control. Specify C or IBM/MS-Pascal.

ASYNCH MANAGER

\$175.00

Full featured asynchronous communications library providing interrupt driven support for the COM ports; I/O buffers up to 64K; XON/ XOFF protocol; baud rates up to 9600; modem control and XMODEM file transfer. Specify C or IBM/MS-Pascal.

Turbo POWER TOOLS PLUS

\$99.95

NEW! Expanded string support; extended screen and window management including EGA support; pop-up menus; memory management; execute any program from within Turbo Pascal; interrupt service routine support allowing you to write memory resident programs; schedulable intervention code.

Turbo ASYNCH PLUS

\$99.95

Complete asynchronous communications library providing interrupt driven support for the COM ports; I/O buffers up to 64K; XON/ XOFF protocol; and baud rates up to 9600.

RUNOFF

\$49.95

NEW! Text formatter written especially for programmers; flexible printer control; user-defined variables; index generation; and general macro facility. Crafted in Turbo Pascal.

EXEC

\$95.00

Program chaining executive. Chain one program from another even if the programs are in different languages. Shared data areas can be specified.

ORDER TOLL-FREE 800-227-8087!



MULTITASKING

Introducing

MultiDos Plus

The new multitasking software for the IBM-PC.

Ideal for developing applications in process control, data acquisition, communications, and other areas. Check these features which make **MultiDos Plus** an unbeatable value.

- Run up to 32 programs concurrently.
- Your software continues to run under DOS. No need to learn a new operating system.
- Use the compilers you already have. Supports software written in any language.
- Operator commands to load/run programs, change priority, check program status, abort/suspend/ resume programs.
- Programmatic interface via INT 15H for the following.
 - Intertask message communication. Send/receive/check message present on 64 message queues.
 - Task control by means of semaphores. Get/release/check semaphores.
 - Change priority-128 priority levels.
 - Suspend task for specified interval.
 - Spawn and terminate external and internal tasks.
 - Disable/enable multitasking.
 - * and more!
- Independent foreground / background displays.
- Access to DOS while applications are running.

Hardware/Software Requirements

IBM PC/XT/AT or true clone. Monochrome/CGA display adaptors or equivalent cards only. Enough memory to hold **MultiDos Plus** (48 KB) and all your application programs. Also may need 4 or 16 KB memory for "hidden screens" for each active task. MS-DOS (or PC-DOS) 2.0 or later operating system.

ONLY

\$49.95

Outside USA add \$5.00 shipping and handling. Visa and Mastercard orders call toll-free: 1-800-367-6707. In Mass call 617-651-0091, or send check or money order to:

NANOSOFT 13 Westfield Rd, Natick, MA 01760

MA orders add 5% sales tax. Write for

source code and quantity price.

CIRCLE 309 ON READER SERVICE CARD

STRUCTURED PROGRAMMING (continued from page 129)

SIC uses the same storage location for identical public variables declared in two or more modules. It is your responsibility to manage the values in duplicated public variables. The solution is relatively simple: reassign their values to program variables with different names. This protects you from unwanted changes in the values of public variables while calling different modules. Concerning duplicate routines, True BASIC considers the first duplicate routines to be valid ones. The only remedy is to change the duplicate routine names.

• All the current IBM PC Modula-2 implementations link entire library modules without performing code optimization. Import one routine, and the rest of the library follows! By contrast, linking a True BASIC main program with libraries and modules

is optimized.

The advanced software engineering features of True BASIC add more power and punch to BASIC. The implementation of modules is indeed controversial, and I expect it to generate great likes and dislikes.

Availability

All the source code for articles in this issue is available on a single disk. To order, send \$14.95 to *Dr. Dobb's Journal*, 501 Galveston Dr., Redwood City, CA 94063 or call (415) 366-3600 ext. 216. Please specify the issue number and format (MS-DOS, Macintosh, Kaypro).

DDJ

Vote for your favorite feature/article. Circle Reader Service **No. 7**

```
! PROGRAM Sort and Search
Library "Sort.mdl"
DECLARE DEF Search_Index
DECLARE PUBLIC Item$(), NData
let NData = 0
! Count items in DATA statements
DO WHILE MORE DATA
    let NData = NData + 1
    READ Dummy$ ! use dummy variable
LOOP
RESTORE ! DATA counter
CALL Set Up ! Adjust Item$() if needed
! Read DATA into Item$(), now that we have enough space
FOR I = 1 TO NData
   READ Item$(I)
NEXT I
CALL Sort and Index ! Sort and prepare index table
let Occur = 1 ! Search for first occurance
DO
   INPUT PROMPT "Enter sought keyword or [Q] to exit ? " : Search$
    let Search$ = UCASE$ (Search$)
    IF Search$[1:1] <> "Q" THEN
        PRINT Search$;" is item number "; Search Index(Search$, Occur)
        PRINT
   FLSE
        PRINT
        PRINT "PRESS ANY KEY TO EXIT "
   END TF
LOOP UNTIL Search$[1:1] = "Q"
! DATA statements contain a list of Pascal keywords DATA WRITE, READ, ASSIGN, SEEK, HI, LO, SQRT
DATA SQR, TAN, SIN, COS
DATA IFF, THEN, ELSE, WHILE, REPEAT, BEGIN
DATA FUNCTION, VAR, TYPE
DATA RECORD, SET, FOR, PROCEDURE, PROGRAM
```

Example 4: True BASIC source code for application program using module Sort, shown in Example 3

QUIT DOING GRUNT WORK.

Let Greenleaf do it for you and set you free.

C Program developers, stop slaving!

Greenleaf libraries have the functions you need — already perfected and in use by winning program developers in major corporations such as IBM, EDS and GM.

Between our Greenleaf Functions and Greenleaf Comm Library, we have over 340 functions on the shelf. Each one can save you time and effort. Money, too.

Many C programmers have told us that, even if they only use one or two functions, our products easily pay for themselves:

The Greenleaf Functions

The most complete and mature C language function library for the IBM PC, XT, AT and close compatibles. Our version 3.0 includes over 225 functions — DOS, disk, video, color text and graphics, string, time/date, keyboard, new disk status and Ctr1-Break control functions plus many more!

The Greenleaf Comm Library

Our 2.0 version is the hottest communications facility of its kind. Over 120 all new functions — ring buffered, interrupt-driven asynchronous communications. Call Toll Free

1-800-523-9830

In Texas and Alaska, call

214-446-8641





GREENLEAF

Software

Greenleaf Software, Inc.
1411 LeMay Drive Suite 101
Carrollton, TX 75007

If you need more than 2 ports, only Greenleaf gives you the total solution — boards, software, and complete instructions that enable you to build a 16-port communication system.

And no matter how many ports you have, it's virtually impossible to lose information with multiple file transfers. XMODEM, XON/XOFF and Hayes modem controls are featured.

We support all popular C compilers for MS DOS: Lattice, Microsoft, Computer Innovations, Wizard, Aztec, DeSmet and Mark Williams.

Order today!

Order a Greenleaf C library now. See your dealer or call 1-800-523-9830. Specify compiler when ordering. Add \$8 for UPS second day air, or \$5 for ground. Texas residents, add sales tax. Mastercard, VISA, P.O., check, COD. In stock, shipped next day.

Greenleaf

Comm Library v2.0	\$185
Greenleaf Functions v3.0	\$185
Digiboard Comm/4-II	\$315
Digiboard Comm/8-II	\$515

We also sell compilers, books and combination packages.

CIRCLE 97 ON READER SERVICE CARD

Object-Oriented LISP on PCs

This month I am going to focus on a very powerful yet inexpensive version of LISP for PCs and compatibles that offers an object-oriented extension called SCOOPS and other interesting features.


PC Scheme 2.0

PC Scheme 2.0. from Texas Instruments, is one of the most impressive programming tools currently available for the development of AI-oriented software on PCs. One of the reasons for this is that it is a dialect of LISP compact enough to be viable on the PC without hobbling the power of the language. It is useful as a learning tool as well, both because of its low price and because of its compatibility with the standard textbook used for teaching undergraduate programming courses at MIT-The Structure and Interpretation of Computer Programs, by Abelson and Sussman (MIT Press, 1985), PC Scheme has many features that previously have existed only on expensive hardware such as LISP machines. There are limits as to what such features can do when running on small machines, but their very presence is highly welcome and a strong indication of the power now available to programmers at an affordable price.

PC Scheme is a superset of the Scheme dialect of LISP, which was developed ten years ago at MIT by Guy Steele and Gerry Sussman as a medium for teaching new and powerful

by Ernest R. Tello

programming concepts. Today Scheme is considered one of the most modern and progressive of the LISP dialects. Because much of its power is available in a relatively small size, Scheme has many advantages for small machines. This version of the Scheme dialect is one of the relative newcomers in the family of LISP im-



plementations for PCs.

What is so different and so special about Scheme? And how does it compare with Common LISP?

Scheme is like Common LISP in that it supports the lexical scoping of variables, but it also offers several other important and progressive ideas that still have not passed into the LISP mainstream, though it is possible that in the future many of them will.

Although at first it seems as though Scheme is loaded with a kitchen sink of various programming ideas, the underlying basis of it is actually quite simple and well integrated. One important idea in Scheme is that of an environment that can be saved as a context, allowing control to shift temporarily to another such environment and then to return again to the original environment. This may sound like the context switching that is familiar to computer scientists working at the systems level, but here it has a different meaning. Here, the context in terms of an environment means a set of bindings of variables and named functions taken as a

A programming concept that is taken particularly seriously in Scheme is that of first-classness. This idea did not originate with Scheme, but in this dialect of LISP, it has been taken to its most complete expression. Generally speaking, a first-class object is one that has no restrictions on the way it can be used. More specifically, in most programming languages, only numbers, characters, and strings at the most are first-class objects. Even

here, frequently only integers are really first class, not numbers in general, and often there may be certain restrictions on the use of one or more of these types of objects in various respects. Usually, for example, you cannot pass arrays, records, and functions as arguments to functions or store them in one another. Even in conventional LISP dialects, some special handling is required when a function is passed as an argument to another function.

In this respect, Scheme is quite radical. The idea is for everything in Scheme to be a first-class object. In PC Scheme, for example, not only procedures but also environments and two other things called continuations and engines can be stored in compound data structures, returned as arguments by a procedure, and bound to variables in three distinct ways.

Functions in LISP are defined through lambda bindings. Because this is strongly analogous to variable binding, some LISP afficionados have wondered why functions are not declared just like variables and lists as:

(SETQ [name] lambda [args] functionbody)

Well, in Scheme, this is exactly what happens, although it is the SETQ that is dropped and DEFINE is used for the binding of all objects globally with lexical scoping. SET! is used only for changing the binding of objects that have already been created. Scheme uses the convention that functions ending in an exclamation point modify their arguments and those that end in a question mark are predicates that return true or false. So, for example, zerop in LISP becomes zero? in Scheme.

The commitment to making everything in Scheme a first-class object is nothing short of revolutionary. It is staggering to think of the full potentential of a programming system with such capabilities. It is doubtful whether anyone has attempted to take this feature of Scheme to the limits of its power.

This is by no means the only radical concept in the Scheme design, however. Another concept that is important in the Scheme dialect is that of a continuation—a basic concept of control structures in programs. Many of the more familiar LISP control structures such as catch and throw can be regarded as exemplifying the idea of a continuation, but in Scheme the more general construct is available that enables the more specific ones to be custom-built. Essentially, a continuation is the process to which a computation will progress at a future point in time as has been specified through a programming construct. More specifically, the continuation is the part of a program that can be thought of as waiting for the result of a current computation, and in Scheme such a continuation is a first-class object, just as any current piece of data can be.

Control Structures

Some LISP programmers might be shocked to learn that there are no PROGs in Scheme. This is somewhat more of a policy statement than an absolute exclusion, however. Scheme has some other special forms for control that, although they do not specifically replace PROGs, certainly do nearly anything that most PROG constructs can. One exception to this is PROG2, because Scheme does not seem to have a control form that evaluates only the second clause in a sequence. But obviously there are other ways of doing what PROG2 does. Many stalwart LISP programmers consider the wholesale use of PROG constructs to be a crutch to be avoided whenever possible, much like the way structured programming acolytes feel about GOTOs.

LETREC is an interesting variant of the LET macro that allows a construct called mutually recursive functions, which by definition typically come in pairs. The best way of understanding this is by a specific example. The following one is from the PC Scheme manual; it implements two interdependent functions, even? and odd?, within the same binding environment, each of which recursively calls the other:

The *LETREC* control structure allows two or more lambda procedures to be defined in the same environment. None of the lambda procedures are self-sufficient, but collectively they work in a highly efficient manner by calling one another for parts of their operation.

The Full-Screen Editor

PC Scheme comes with a powerful Emacs-style editor that offers many useful and convenient enhancements, though the speed of many of its operations could be improved upon. One useful innovation is that, as you enter right parentheses, not only does the matching parenthesis become highlighted and blink but also the expression with which the clause begins that is enclosed by these parentheses is printed in a message area down at the bottom of the screen. This is considerably more than a cosmetic enhancement because in those cases in which a long LISP function is used-larger than a single screen-the blinking parenthesis approach alone is useless. This enhancement virtually puts to an end any need for counting parentheses needed at the end of a LISP function on a routine basis, though for debugging, of course, it still never goes away.

Engines

As I indicated briefly earlier, PC Scheme supports an extension that includes a special construct that provides for resource-oriented scheduling. An engine is a special procedure that is given a certain time, measured in ticks that are based on hardware clock interrupts, to complete its com-

putation. It is supervised by two routines called the a success procedure and the a failure procedure. If the engine's computation is completed before its assigned time has expired, then the success procedure is invoked and the result, together with the number of expired ticks, is returned. If the time expires before the computation is finished, the failure procedure is invoked with the creation of a new engine, which continues the original computation. Although there is no built-in support for allowing a running engine to invoke another engine, the implementation of such nested engine mechanisms is possible using certain special techniques. Engines are particularly well suited for developing discrete time simulation applications, which ordinarily would require multiprocessing support on the operating system level.

SCOOPS

Although object-oriented programming with the message passing paradigm is not a necessary part of the Scheme dialect, it seems to fit in well with the Scheme approach. TI has included a powerful object-oriented extension called SCOOPS with PC Scheme. The two things that make the SCOOPS extension alone more than worth the price of the whole package are its support of multiple inheritance and active valuesthings that previously were only available on very expensive hardware.

The object-oriented approach used by the SCOOPS package is the nonhierarchical mixins made popular by the Flavor system used on Symbolics LISP machines. Like Smalltalk and most object-oriented programming systems, SCOOPS has a class system and the ability of classes to inherit variables and functions from other classes. But unlike Smalltalk and like Flavors, SCOOPS classes are not limited to inheritance from superclasses in a simple tree hierarchy. Mixins allow classes to be defined that can inherit from any other classes the programmer chooses.

SCOOPS' support for active values the capability often called procedural attachments in frame-based systems—greatly extends the power of its class system because active values

ARTIFICIAL INTELLIGENCE (continued from page 133)

provide a means to assign a function, or even a complex program, to be evaluated whenever an active value variable is accessed. This provides for association of complex data structures to SCOOPS instance variables and the opportunity for calculated values based on both initial assignments to an instantiated object and to conditions in a dynamically changing environment.

To illustrate the use of active values, you can take a simplified version of the difficult problem of composite objects as used in the CommonLoops system at Xerox PARC. A composite object is an instance of a class that is considered as composed of objects that are instances of other classes, some of which may themselves be composite objects. For example, the body is composed of a head, arms, legs, and torso. The head, hands, and feet can also be represented as composed of other objects such as eyes, ears, fingers, toes, and so on. How can composite objects be implemented in a system such as SCOOPS? Ordinarily, SCOOPS does not even support lists as values of slots or instance variables, much less more complex data structures. At the minimum, a composite object has to contain a list of all of its components. Active values allow this to be done by assigning procedures to instance variables that access external data structures and knowledge structures. The format for specifying an active value is:

```
(instvar
([VARIABLE]
(active [INITIAL-VALUE]
[GET-FUN]
[PUT-FUN]
```

Here, GET-FUN and PUT-FUN represent two procedures—each of one argument only—that are automatically evaluated when the usual get and put methods for an instance variable are sent to an object. The INITIAL-VALUE of the variable is the argument that is passed to these functions.

One way to make the functions access a list—so that when the usual *get* method is used, it returns, for example, a list of the composite object's component parts—is to make the ini-

```
; (C) Copyright 1987 Ernest R. Tello
(define-class composite-object
          (classvars class-part-name class-part-num)
          (instvars (part-names (active parts get-parts add-part))
                    (numbers-of-parts (active '#-parts num-parts
                                                    more-parts)))
        (options
          (gettable-variables class-part-name part-names
                                        numbers-of-parts)
            settable-variables
            inittable-variables))
(define human-body-parts '() )
  (putprop 'human-body-parts 1 'head)
  (putprop 'human-body-parts 1 'neck)
  (putprop 'human-body-parts 2 'arms)
  (putprop 'human-body-parts 2 'hands)
  (putprop 'human-body-parts 1 'trunk)
  (putprop 'human-body-parts 2 'legs)
  (putprop 'human-body-parts 2 'feet)
(define (num-parts p-list)
  (princ p-list))
(define part-map (proplist 'human-body-parts))
(define-class body
     (classvars (class-part-name 'body-parts) (class-part-num
                                           'human-body-parts))
     (mixins composite-object))
(define body-parts '(head neck arms hands trunk legs feet))
(define-method (composite-object put-cpart-name) (new-part)
                (set! body-parts
                      (append (eval (get-class-part-name))
                                         (list new-part))))
(define (add-part new-part)
  (append! (get-class-part-name) (list new-part)))
(define (get-parts val)
  (princ val))
 (define my-body
  (make-instance body
                  'part-names body-parts
                  'numbers-of-parts part-map ))
(compile-class composite-object)
(compile-class body)
```

Example 1: Composite objects in SCOOPS

```
[26] (describe body)

CLASS DESCRIPTION

NAME : BODY

CLASS VARS : (CLASS-PART-NAME CLASS-PART-NUM)

INSTANCE VARS : (NUMBERS-OF-PARTS PART-NAMES)

METHODS : (GET-CLASS-PART-NAME SET-CLASS-PART-NUM

SET-CLASS-PART-NAME SET-PART-NAMES GET-PART-NAMES SET-NUM-

BERS-OF-PARTS GET-NUMBERS-OF-PARTS PUT-CPART-NAME)

MIXINS : (COMPOSITE-OBJECT)

CLASS COMPILED : #!TRUE

CLASS INHERITED : #!TRUE
```

Example 2: PC Scheme description of the class Body as displayed on the screen

EVEN MORE POWER AND FLEXIBILITY

BRIEF 2.0

Users and industry press alike have unanimously proclaimed BRIEF as the best program editor available today. Now, the best gets better, with the release of BRIEF 2.0.

Straight from the box, BRIEF offers an exceptional range of features.

Many users find that BRIEF is the only editor they'll ever need, with features like real, multi-level Undo, flexible windowing and unlimited file size. But BRIEF has tremendous hidden power in its exclusive macro language. With it, you can turn BRIEF

into your own custom editor containing the commands and features you desire. It's fast and easy.

Jerry Pournelle, columnist for BYTE magazine summed it all up by saying BRIEF is, "Recommended. If you need a general purpose PC programming editor, look no further.' His point of view has been affirmed by rave reviews in C JOURNAL, COMPUTER LANGUAGE, DR. DOBB'S JOURNAL, DATA BASED ADVISOR, INFOWORLD AND PC MAGAZINE.

One user stated "BRIEF is one of the few pieces of software that I would dare call a masterpiece." Order BRIEF now and find out why. BRIEF 2.0 is just \$195. If you already own BRIEF, call for upgrade information. TO ORDER CALL: 1-800-821-2492 (in MA call 617-659-1571)

As always, BRIEF comes with a 30 day money-back satisfaction guarantee.




(617) 659-1571


Look at these BRIEF 2.0 enhancements!

Main Features:

- All new documentation with tutorials on basic editing, regular expressions and the BRIEF Macro Language.
- Setup program for easy installation and configuration.
- (Requires no knowledge of the macro language) Increased speed for sophisticated operations like Undo and
- Expanded regular expressions, with matching over line
- More block types, with marking by character, line or column.
- Command line editing (move cursor, add and delete
- characters, specify command parameters).
- Support for more programming languages.

- Enhanced large display support, including wider displays. Optional borderless windows.
- Reconfigurable indenting for C files (supports most indenting styles)





- Full multi-level Undo
- Windows
- Edit many files at once
- File size limited only by disk space
- Automatic language sensitive indentation



Requires an IBM PC or compatible with at least 192K RAM. BRIEF is a trademark of UnderWare. Inc

CIRCLE 142 ON READER SERVICE CARD

ARTIFICIAL INTELLIGENCE (continued from page 134)

tial value of the active value variable the name of the list of parts and define the get and put functions such that they can return and append this list. The appending function is tricky to implement because it needs the name of the list so that things can be appended to it. Because it is desirable to make such a function as general as possible so that it can be used with any composite object, it has to have a way of finding the name of the specific list of parts that applies only to the particular object in question. The problem is that the initial value, which is the name of the list in question, is not returned by its normal get function anymore but is passed as an argument to the active value function. One way to get around this problem is to use another variable that is not an active value variable to store the name of the list where it may be easily accessed by a global function.

I'll now illustrate a successful application of this strategy in PC Scheme. Two classes have been implemented-Composite-Object and Body-where the first is a mixin, or superclass, for the second. The code for these classes is supplied in Example 1, page 134. When you ask Scheme to describe the class Body, you see the screen display shown in Example 2, page 134. The variables of Body have all been inherited from Composite-Object. The variable partnames is implemented as an active value that accesses a list and prints its contents when called. The variable numbers-of-parts is also an active value, but in this case, its get function returns and prints a property list that contains a list of body parts each with the property of how many such parts the body should contain. One possible extension of this example would be to define various-subclasses for different types of organisms. So, for example, humans, horses, ants, spiders, and centipedes would have different entries on their property lists for the number of legs.

Using the current example I created an instance of the *Body* class called *My-Body*. I set the values of its variables so as to reference appropriate lists and property lists for the names and numbers of its parts. Then, sending it the messages indicated produced the results:

[27] (send my-body get-part-names)
(HEAD NECK ARMS HANDS TRUNK LEGS

[28] (send my-body get-numbers-ofparts) (FEET 2 LEGS 2 TRUNK 1 HANDS 2 ARMS 2 NECK 1 HEAD 1)

One of the nice discoveries I made when developing this use of active values is that, once this interface to more complex auxiliary data structures has been correctly implemented, the values will then actually be displayed as if they are part of the object when the describe function is called. So, in the case of the object My-Body, which is an instance of the Body class, the following result is returned when requesting its description:

[30] (describe my-body) INSTANCE DESCRIPTION

Instance of Class BODY Class Variables :

CLASS-PART-NAME : BODY-PARTS CLASS-PART-NUM : HUMAN-BODY-

PARTS

Instance Variables:

NUMBERS-OF-PARTS : (FEET 2 LEGS 2 TRUNK 1 HANDS 2 ARMS 2 NECK 1 HEAD 1)

In the full implementation of the Composite-Object class, there would be various additional methods, including one that could automatically initialize the objects that were part of any instance of this class or any of those of which it was a mixin. This method would include a recursive procedure that would access the part-names slot to get a list of all of its components and then the numbersof-parts property list to find out how many of each were needed. You could then repeat this for all of those parts that were also composite objects, until all the objects being instantiated were simple and not composite. As a variant, you could build a subclass of Composite-Object, like the Perspective class in KRL and Loops, in which the objects that were its components would only be instantiated on request. The idea of a Perspective is a composite whose components are not exactly parts but various different roles in which the individual object participates. In this sense, it would be as if the individual had various distinct aspects, each of which could independently be members of different classes.

DDJ

Vote for your favorite feature/article. Circle Reader Service No. 8.

Vendor


PC Scheme Texas Instruments 12501 Research Blvd., MS 2223 Austin, TX 78769 (512) 250-7533 Reader Service No. 43

Changing Your Address?

To change your address, attach your address label from the cover of the magazine to this coupon and indicate your new address below.

Apt. #
State

Mail to: Dr. Dobb's Journal, PO Box 27809, San Diego, CA 92128

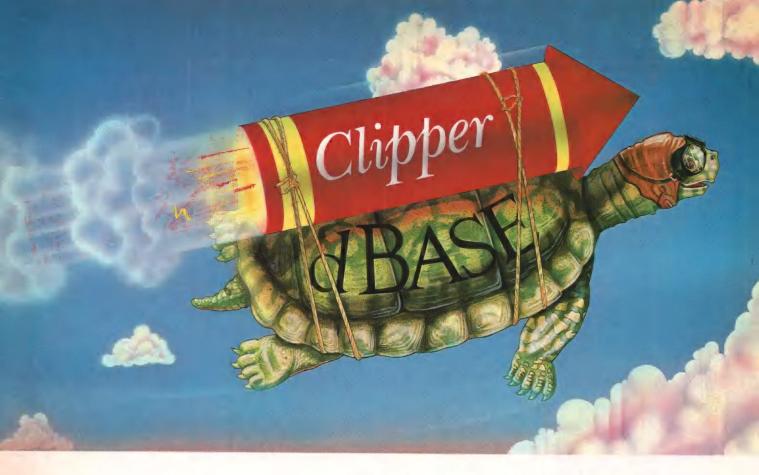

Real programmers don't use dBASE. Or do they?
We're finding that some very swift programmers are using it to

Turtle Souped

write some very fast applications, and are completing their projects much more quickly.

But they cheat.

They use our Clipper™ compiler to combine dBASE™ with C and assembler.

With dBASE used like pseudo-code, they can then quickly create prototypes that actually run.

Then, with dBASE doing the high-level database functions, they use our Clipper compiler to link in C or assembly language modules from their own bag of tricks.

And they're finding that they're linking in less than they expected because Clipper compiled code runs so fast and because of Clipper's built-in enhancements.

Clipper includes easy networking that provides file and record locking the way it should be done.


Fast screens that can be treated as memory variables and eliminate the need for direct screen writes and all that tortuous heap management code.


Box commands that make windowing a breeze. And more.

So if you'd like to use your time more productively, check us out: Nantucket Corporation, 12555 W. Jefferson Boulevard, Los Angeles, CA 90066.

Or if you're on deadline, call (213) 390-7923 today.


Clipper could get you out of the soup.





Dr. Dobb's Toolbook Shelf

Dr. Dobb's Toolbook of 68000 Programming



n this complete collection of practical programming tips and techniques for the 68000 family, you'll find the best articles on 68000 programming ever published in Dr. Dobb's, along with new material from 68000 experts. You'll find a set of development tools, routines, useful applications, and examples to show you why computers using the 68000 chip family are easy to design, produce and upgrade. All programs are available on disk.

Please specify one of the following disk formats: MS-DOS, CP/M 8", Osborne, Macintosh, Amiga, Atari 520st.




68000 Cross Assembler

n executable version of the 68000 Cross-Assembler discussed in the book is also available, complete with source code and documentation. Requires CP/M 2.2 with 64K or MS-DOS with 128K. Specify: 8" SS/SD, Osborne, MS-DOS

68000 Toolbook 68000 Toolbook with disk 68000 Cross Assembler Item #040 \$29.95 Item #041 \$49.95 Item #042 \$25.00

Dr. Dobb's Toolbook of Forth




Forth programs and tutorials contains Dr. Dobb's best Forth articles, expanded and revised, along with new material. Contents include: Mathematics in Forth, Modifications/Extensions, Forth Programs, Forth--The Language, Implementing Forth. All screens in the book are also available on disk as ASCII files.

Toolbook of Forth #030 \$22.95 Toolbook of Forth with disk

Item #031 \$39.95

Please specify one of the following disk formats: MS/PC-DOS, Apple II, Macintosh, CP/M. For CP/M disks, specify Osborne or 8" SS/SD.

Dr. Dobb's Toolbook of C



his authoritative reference contains over 700 pages, including the best C articles from Dr. Dobb's Journal, along with new material. You'll find hundreds of pages of valuable C source code, including a complete compiler, an assembler, and text processing programs.

Toolbook of C Item #005 \$29.95

Small Windows:

A Windowing Library for Small C Small-Windows is a complete windowing library for Small-C. The package contains: 18 video functions written in assembly language; 7 menu functions that support both static and popup menus; and 41 window functions, including functions to clean, frame, move, hide, show, scroll, push, and pop windows. A file directory facility illustrates the use of the window menu functions and provides file selection, renaming and deletion capability. Two test programs are also included. For PC/MS—DOS systems only. Documentation and full source code is included.

Small-Windows Item #109 \$29.95

Small-Tools: Programs for Text Processing



his package of Small-C programs performs specific, modular operations on text files. It is supplied as source code with full documentation. With the Small-C Compiler, you can select and adapt these tools to meet your needs. Please specify MS/PC-DOS or CP/M: Kaypro, Osborne, Apple, Zenith Z-100 DS/DD, 8" SS/SD.

Small-Tools

Item #010A \$29.95

Small-Mac: An Assembler for Small-C



his package includes: a simplified macro facility, C language expression operators, object file visibility, descriptive error messages and an externally defined instruction table. Source code and documentation is included. CP/M only. Please specify: Kaypro, Osborne, Apple, Zenith Z-100 DS/DD, 8" SS/SD.

Small-Mac

Item #012A \$29.95

The Small-C Handbook & Small-C Compiler



his compiler and handbook provide everything you need for learning how compilers are constructed, and for learning C at its most fundamental level. You'll find a discussion of assembly language concepts and program translation tools, and of how to generate a new version of the compiler. Full source code is included. Please specify MS/PC-DOS or CP/M: Kaypro, Osborne, Apple, Zenith Z-100 DS/DD, 8" SS/SD.

CP/M Compiler & Handbook Item #006B \$37.90 MS/PC-DOS Compiler & Handbook Item #006C \$42.90

Special Packages

CP/M C Package Save



Receive: Dr. Dobb's Toolbook of C, The Small-C Handbook and Small-C Compiler, Small-Mac Assembler, and Small-Tools Text Processing Programs. Only \$99.95!

CP/M Package Item #005A \$99.95

MS/PC-DOS C Package



Order Form

Receive: Dr. Dobb's Toolbook of C, The Small-C Handbook and MS/PC-DOS Addendum, Small-C Compiler, Small-Tools Text Processing Programs and Small Windows. Only \$109.95!

MS/PC-DOS

Package

Item #005W \$109.95

	urn this order form with your or., Redwood City, CA 94063		s,
	FREE 800-533-4372 Mo CA call 800-356-2002	n-Fri 8AM-5PM	
Name			_
	State	Zip	
Item #	Description	Pric	e
			_
			_
			Г

Subtotal
CA residents add sales tax%
Add \$2.25 per item for shipping
TOTAL
Please specify disk format
MS/PC-DOS Macintosh Apple II Amiga Atari 520st
CP/M Kaypro Osborne Apple
Zenith Z-100 DS/DD 8" SS/SD
Check enclosed. Make Payable to M&T Publishing.
arge my VISA M/C Amer.Exp.
rd No

3127 B

Get a Grip on Assembly Language.

The award winning Visible Computer: 8088.



The Visible Computer is a book and software combination for mastering the elusive skills of assembly language. PC Tech Journal took one look and made it their September '85 "Program of the Month."

It's an animated simulation of the PC's microprocessor that lets you see with your own eyes how assembly language works. You'll be using it as a debugging tool for years to come.

It's a tutorial. A lot of people think the 350 page manual is the best book on assembly language ever written.

It's 45 demonstration programs you'll execute with the simulator, from simple register loads to advanced programs that manipulate interrupts and perform file I/O. And what you'll learn applies to all 86 family processors, including the 80186 and 80286.

The Visible Computer for IBM PC/XT/AT and true compatibles. If your dealer doesn't have it, order direct: Software Masters, 2714 Finfeather, Bryan, TX, 77801. (409) 822-9490. Please include \$3.00 shipping. Bank cards accepted.



Software Masters

processor as it executes programs.

FORUM

VIEWPOINT (continued from page 14)

Finally, print out a copy of every program that does not print out a copy of itself.

This program, in the process of generating all programs, will eventually generate itself. Does it print out a copy of itself? If it does, it is breaking the rule by printing out a copy of a program that prints out a copy of itself. If it does not, it is breaking the rule by failing to print out a copy of a program that does not print out a copy of itself. This fatal contradiction proves that the halting problem has no solution.

You may recognize this as Russell's paradox (the set of all sets that do not contain themselves) or as the barber paradox (the barber who shaves every man who does not shave himself).

Any problem that a debugger can convert to the halting problem, such as the string-output problem, is equally unsolvable. Some other obvious examples are:

- 1. determining whether a program will reach a specified point (Ada programmers: this is why *PROGRAM*_ERROR has to be a run-time error, not a compile-time error)
- 2. determining whether a variable is initialized before it is used
- determining whether a given segment of code is inaccessible and will never be executed
- determining whether two programs do the same thing

Of course, a debugger or compiler can sometimes predict such errors for example, inaccessible code can sometimes be identified at compile time. But universal solutions to such problems do not exist.

The impossibility of determining whether two programs do the same thing means that it is always possible to defeat a certain kind of Trojan horse. In a lecture reprinted in the Notices of the ACM (August 1984), Ken Thompson argued that he could put a Trojan horse into a C compiler that would miscompile the login statement to allow him access to any Unix system compiled with it, and it would miscompile the C compiler to insert a copy of itself. The Trojan horse itself would not appear in the source code for the C compiler. In a

letter to the editor, Steve Draper noted that such a Trojan horse can be defeated by paraphrasing the C compiler (writing different code that does the same thing) and then recompiling it. No Trojan horse can infallibly recognize paraphrased programs—hence there is always a paraphrase that will defeat the Trojan horse.

My own opinion in this matter is that, unless the Trojan horse were skillfully written, most paraphrases would defeat it, and in fact it would probably be defeated eventually by normal software maintenance. Any Trojan horse smart enough to recognize most paraphrases would probably be much larger than the rest of the C compiler. You'd never get it through the gates.

The halting problem is intimately related to two other problems, which were posed by the mathematician David Hilbert in 1900. Is there a formal proof or disproof for every mathematical statement? Is there an algorithm to find proofs?

The first question was answered in the negative by Kurt Goedel in 1931. Goedel's proof was complex, but if you accept the unsolvability of the halting problem, it can be proved simply. Whether a particular program halts is a mathematical statement. In fact, many mathematical theorems are already special cases of the halting problem because you can write a program to search for counterexamples and halt when it finds one. The theorem is equivalent to the assertion that the program never halts.

If there were always a formal proof or disproof of the assertion that a program halts, then you could simply generate all proofs (more or less as the program described earlier generated all programs) until you found either a proof or a disproof. That would solve the halting problem. Because the halting problem is in general unsolvable, there must be at least one mathematical statement of this kind that is undecidable—that is, it cannot be formally proved or disproved.

This shows that it is impossible in general to prove that a program works. Specific programs or limited classes of programs can be proved to do certain things, but there is no way to do this for every program.

Given that some mathematical statements are undecidable, is there a program, the "decidability program," that can tell whether any mathematical statement is decidable. even without deciding whether it is true or false? As you might have guessed from the tone of this article, the answer is again no. If you have a decidability program, you can take any program and ask whether it halts. Then apply the decidability program to this question. If the question is decidable, a search of all proofs will prove it or disprove it. If the question is undecidable, then the program never halts; otherwise, you could prove that it halts by simply running it until it halts.

Therefore, theorem-proving programs, however successful they might be in limited areas, can never prove everything. Some things must always remain beyond their grasp.

These arguments are not rigorous in the mathematical sense because too much has been left out. A major part of Turing's and Goedel's work involved formalization of the concepts of "computation" and "proof"

to the point at which their arguments would be accepted by mathematicians.

You may have already spotted one tacit assumption that does not correspond to reality. The programs are not constrained by memory limitations. If a program does have a memory limitation, then the halting problem can in theory be solved—but only by a program with a much larger memory.

This is how it can be done. A program with a memory limitation has only a finite number of states. A debugger can single-step it, keeping track of the states it has occupied. If it occupies the same state twice before halting, it will repeat the same sequence of states indefinitely and will never stop.

To do this, the debugger needs enough memory to keep track of which states the program has occupied. Only one bit is required for each possible state, but the number of possible states for even a simple program is truly mind-boggling. Every combination of bits in the memory is a different state. Hence a program with only 1,024 bytes of memory has


at least 2^(1024×8) states due to memory configuration alone, to say nothing of flags and registers. This number of flip-flops would not fit into the entire known universe. It can therefore be said that the halting problem has no solution even in this case.

It should be clear, then, that there are definitely some limits to what artificial intelligence can accomplish and that mathematicians' and programmers' jobs can never be completely automated. (This is a great comfort to me because I am a mathematician and programmer.)

Only perfect solutions are impossible, however. It can still be argued, and it is argued by some, that artificial intelligence programs will eventually be able to solve every problem that the human mind can solve, with at least the same success rate. And if the only requirement is practical solutions, not perfect solutions, then many interesting but theoretically unsolvable problems can be solved.

DDJ

Vote for your favorite feature/article. Circle Reader Service No. 1.

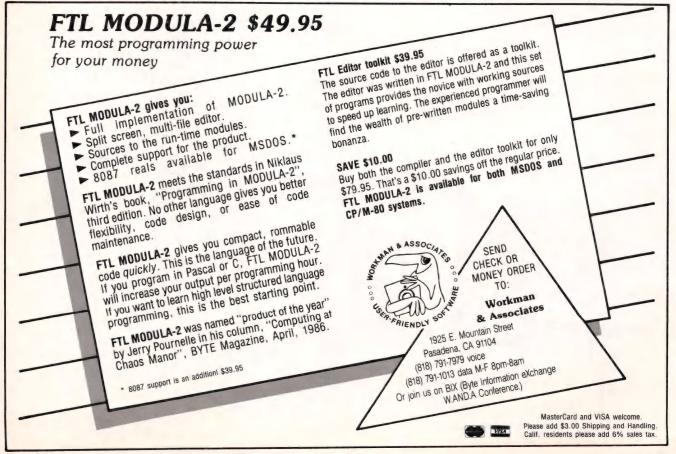

Can You Afford A Million \$ Mistake?

The purchase of your business computer could cost you thousands, maybe millions of dollars.

For just \$19.97 BUSINESS SOFTWARE can help you get what you paid for and more!

BUSINESS SOFTWARE is for the experienced PC user who wants to squeeze the utmost potential from existing equipment AND get full value from new software products being considered.

It only makes "cents" to get a fair return on your investment.

- · Fast-paced tutorials covering the advanced features of popular software,
- · Valuable tips, traps and templates,
- Benchmark style reviews and comprehensive comparisons,
- Advanced macros and actual program examples,
- In-depth software evaluations by eminent experts.


memory:

pitfalls

BUSINESS SOFTWARE delivers editorial that is Read . . . Understood . . . and Put to Work.

Why not start your subscription to BUSINESS SOFTWARE today-you'll not only save over 40% off the newsstand price, but enjoy the convenience of having BUSINESS SOFTWARE delivered right to your doorstep each month.

Take advantage of this low subscription price today!

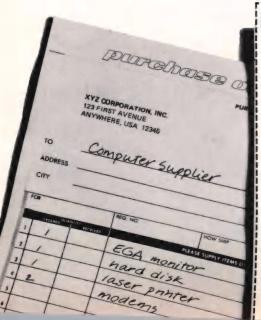

BUSINESS SOFTWARE

Yes! Enroll my subscription to BUSINESS SOFTWARE at a savings of more than 40% off the newstand price

1 Year (12 issues) for \$19.97 — a 40% discount!


2 Tears (24 Issues)	101 333.77 —a 30% discount:	
Payment enclosed	☐ Bill me later	
NT		

Company -Address __ _ State _____ Zip _

Mail to: Business Software Magazine, P.O. Box 27975, San Diego, CA 92128.

Savings based on full one-year newsstand price of \$35.40. In Canada add \$7 for surface mail per year; other countries add \$15 for surface mail per year, \$37 for airmail per year. All foreign subscriptions must be prepaid in U.S. funds drawn on a U.S. bank. Please allow 6-8 weeks for delivery of first issue.

HOT GRAPHICS PACKAGE FOR C PROGRAMS: \$39.95



- Support for EGA, CGA, and Z100
- Over 100 graphics and support functions, many of which are PLOT-10 compatible.
- Many low level support routines reside outside your small model code-data area
- Can write dots thru the BIOS (for compatibility) or to memory (for speed)
- Graphics function help from CED editor available
- World, pixel or turtle color graphics modes
- 47 standard fill patterns, 17 line dashing patterns, Hershey fonts, plus user defineable fill, dash and fonts
- Supports view areas, rotateable fonts, clipping, arbitrary fill areas, extensive error checking, examples, and user's manual.

A must for the graphics enthusiast and a bargain at only

\$39.95

*Requires Eco-C88 C Compiler.

NEW POP-UP WINDOWS FOR YOUR C PROGRAMS.

This windowing library allows you to add pop up windows in your C programs quickly and easily. Use them for help windows, selection menus, error messages, special effects—anywhere you need an attention getter. Just some of the features include:

- CGA, EGA, and monochrome support
- Slow mode option for "flicker" displays
- Control any program that goes through the BIOS

- Use up to 255 windows
- No special window commands; use print f ()
- · Resize and move windows
- Custom window titles and borders
- · Can be used with ANSI device driver
- Most of window's code-data lies outside small model limits
- Use any of the IBM text or block characters
- User's manual and examples

The Windowing Library requires an IBM PC compatible BIOS and the Eco-C88 C compiler.

ONLY \$29.95

HANDY LIBRARIAN MAKES LIFE EASIER.

Now you can combine your modules, functions, and subroutines into your own library for easy link commands. Fully compatible with ANY standard OBJ format files (not just Ecosoft's products). With the Ecosoft librarian, you can:

- Add, delete, and extract from a library
- Get table of contents or index of a library
- Combine libraries, control library page size, use switches for combinations, process complex library requests, use wildcards, and do library directives from command files.
- Complete with user's manual A valuable addition for any programmer.

ONLY \$29.95

Orders only:

1-800-952-0472 Technical Information:

(317) 255-6476

NOT COPY PROTECTED.

A C compiler with many ANSI enhancements

at an unbelievably low price. The Eco-C88 C

· A standard library with more than 200 func-

CC and mini-make that all but automates the

8087 support (we sense the 8087 at runtime

ASM or OBJ output for use with MSDOS linker

Tiered error messages — enable-disable lint-

Everything you need at the unbelievable

Eco-C88 C compiler requires an IBM PC, XT, or AT (or compatible) with 256K of memory, 2 disk

tions (many of which are System V compatible

Prototyping (the new type-checking

Structure passing and assignment

compiler has:

enhancement)

compile process

- no dual libraries)

like error checking

price of \$59.95.

Expanded user's manual

Enum and void data types

· All operators and data types

for greater code portability)

Fast compiles and executing code

CED full-screen program editor

drives and MSDOS 2.1 or later.

Ecosoft Inc. 6413 N. College Ave. Indianapolis. IN 46220


ORDER FORM CLIP & MAIL TO: Ecosoft Inc., 6413 N. College Ave., Indianapolis, IN 46220

		, comego i iro	, maiariapono, ne rollo
ITEM	PRICE	QTY	TOTAL
Flexi-Graph Graphics	\$39.95		
Window Library	\$29.95		
Eco-Lib Librarian	\$29.95		
Eco-C88 C Compiler CED	\$59.95		
		CHIDDING	

	SHIPPING			
	TOTAL			
PAYMENT:	□ VISA	□ MC	□ AE	□ CHECK
CARD #			EXPIR DATE _	
NAME				
ADDRESS	***			
CITY			STATE	



THE STATE OF BASIC



New BASIC Subroutines Continued

In this issue, we resume the discussion about subroutines and look at how they are implemented in Summit Software's BetterBASIC and Borland's new Turbo BASIC.

Subroutines in BetterBASIC strongly resemble Pascal procedures. As a matter of fact, the *PROCEDURE*: <name> syntax is used to declare a BetterBASIC subroutine. Once you type *PROCEDURE*: followed by a subroutine name, BetterBASIC creates a new workspace for that subroutine. This gives subroutines a great degree of freedom because they can have their own line numbers (1 to 32,767) and local variables. Unlike Pascal procedure declarations, subroutine

argument lists in BetterBASIC are declared on separate lines.

Example 1, below, shows a simple subroutine, *Increase*, to increment an integer. Notice that *PROCEDURE: Increase* is typed on one line and its arguments, variables *I* and *J*, are on following separate lines. BetterBASIC requires the use of the keyword *ARG* to distinguish between an argument and a local variable. The */VAR* is used to declare that a variable is passed by reference; otherwise, as in the case of *J*, it is passed by value. The */OPT* is a directive that assigns a default value to a variable.

Example 2, below, shows the simple main program that calls the procedure *Increase* twice. In the first call, *Increase* is supplied with one argument (corresponding to variable *I* in the declaration part of the procedure *Increase*). This causes the default value of 1 to be assigned to variable *J*. In the second call to *Increase*, two arguments are used, causing the value of 2 to be passed to argument *J*.

The BetterBASIC feature of assigning default values to variables "omitted" while calling a subroutine has a parallel feature in the Ada language. To avoid chaos in subroutine calls

when using this feature, you must observe the following rule: you cannot "skip" arguments. In other words, once you rely on the default value of an argument, all the arguments that follow must have default values, which must be invoked. You cannot pick and choose. To use the default-value feature in a BetterBASIC subroutine, divide your argument list into two logical sets of parameters. The first set should always require values to be exchanged with the subroutine; hence, the parameters must be present during a subroutine call. The second set consists of parameters that should have logically related default values (we say logically to stress that these default values are all attributes to a single default state). As a result, these parameters are either present (to provide data for a nondefault state) or absent (to refer to the default-state value). Another approach to using the second parameter set can be related to the fact that its default values cannot be attributes to a finite default state. In this case, arrange the declaration of the subroutine parameters in a sorted order based on the overall probability of not using a default value. This places

```
PROCEDURE: Increase
INTEGER ARG: I/VAR
INTEGER ARG: J/OPT=1
10 I = I + J
END PROCEDURE
```

Example 1: BetterBASIC procedure to increment an integer variable

```
INTEGER A, B

10 A = 10

20 B = 12

30 Increase A 'increment with default value of 1

40 PRINT A 'prints 11 = 10 + 1 (default)

50 Increase A, B

60 PRINT A 'prints 13 = 11 + 2

70 END
```

Example 2: BetterBASIC demonstration program using procedure Increase

```
SUB Stat (X#(2), Col%, Average#, Sdev#) STATIC
LOCAL Sum#, SumX#, SumXX#, Row%
Sum# = 0.0
SumX# = 0.0
SumXX# = 0.0
FOR Row% = LBound (X#, 1) TO UBound (X#, 1)
 Sum# = Sum# + 1.0
 SumX# = SumX# + X#(Row%, Col%)
 SumXX# = SumXX# = X#(Row%, Col%)^2
NEXT ROWS
IF Sum# ) 1.0 THEN
 Average# = SumX# / Sum#
 Sdev# = SQR((SumXX# - SumX#^2 / Sum#) /
                                        (Sum# - 1.0)
ELSE ' code for insufficient data
 Average# = -1.0E+30
 Sdev# = -1.0E+30
END IF
END SUB
```

Example 3: Turbo BASIC subroutine to obtain the average and standard deviation of data stored in an array

parameters that more seldomly resort to default values in the beginning of the list and vice versa.

Looking at Example 2, you may observe more differences in syntax between BetterBASIC and the other BASIC implementations we discussed in the previous column—for example, the *CALL* keyword and parentheses are not used in BetterBASIC.

Because BetterBASIC supports Pascal-like record structures, you can use them to pass many variables and still keep a short, formal argument list. This feature enables BetterBASIC to refrain from supporting SHARED variables (as in QuickBASIC) to keep the argument list small. Passing record-type arguments in BetterBASIC subroutines is even safer because you maintain tighter control over shared data and greatly minimize any undesirable side effects.

BetterBASIC does not offer built-in functions to return the lower and upper bounds of arrays, which makes writing general-purpose, array-manipulating routines a bit more involved. Because the lower bound of any array can be 0 or 1, you can write such routines to start at index 1. Your routines must rely heavily on integer-type parameters that supply the upper array bounds, however. Such reliance makes the routines extremely vulnerable to corrupted upper bounds values; there is no easy way to compare these parameters with the actual array bounds they represent. The positive side of using such parameters is that, when arrays are not fully populated with valid data, you still need to supply data counters. Thus, the upper array bound parameters frequently end up being used as data counters.

Turbo BASIC implements subroutines in a manner that resembles QuickBASIC: GOSUB using labels to direct the jumps to subroutines and named subroutines. A callable subroutine (or procedure as it is called in Turbo BASIC) can have an argument list to pass arguments that are scalar and/or array variables. With Turbo BASIC you must specify the number of dimensions of an array using an integer constant enclosed in parentheses following the array name.

Like QuickBASIC and True BASIC, variables are passed by reference and expressions are passed by value. Turbo BASIC supports STATIC and RECURSIVE subroutines as well as LOCAL, STATIC, and SHARED attributes for variables in a subroutine. The LOCAL attribute declares a variable to have a scope and visibility limited to the subroutine. Local arrays must be dimensioned as dynamic arrays (Turbo BASIC supports static and dynamic array dimensioning). Static variables retain their values between subroutine calls, whereas shared variables be-

come global to the rest of the program. Turbo BASIC also implements *EXIT SUB* to enable program flow to return to the caller and supplies built-in functions to return the lower and upper bounds of an array.

Example 3, page 144, shows a Turbo BASIC subroutine that returns the basic statistics and data stored in an array. It is similar to the QuickBASIC and True BASIC versions presented in the last column.

DDJ

Vote for your favorite feature/article. Circle Reader Service No. 9.

Lattice Works

LATTICE ANNOUNCES MICROSOFT WINDOWS SUPPORT IN VERSION 3.2

Version 3.2 of the Lattice MS-DOS C Compiler features full support for Microsoft Windows—including the "far," "near," and "pascal" keywords.

In addition, version 3.2 includes the ability to generate more than 64K bytes of static data and to declare objects larger than 64K bytes. It also includes improved support for ROM-based applications via the "const" data type. Version 3.2 is a significant release because it eliminates Microsoft's claimed monopoly on future MS-DOS C development tools. Now that the Lattice MS-DOS C Compiler supports a window interface, programmers using Lattice C can avoid the problems caused by switching to a different compiler. \$500.00

LATTICE NOW OFFERS ENHANCED AmigaDOS C COMPILER

Version 3.1 of the Lattice AmigaDOS C Compiler offers a new library with 100 more functions than the standard AmigaDOS C Compiler. What's more, increased library modularity and new addressing modes help reduce load module sizes by more than 20%. The new version also features faster pointer and integer math, faster IEEE floating point routines, direct support of the

Amiga's FFP format floating point library, and multi-tasking support.

With Version 3.1, Lattice has broken free of the reliance on the Amiga standard linker and object file format. This new release includes completely new expanded documentation, and a Lattice assembler and linker which remain compatible with previous software but allows professional programmers to take advantage of both the Amiga's speed and the industry's standardization.

Lattice AmigaDOS C Compiler with Lattice's Text Management Utilities, \$225. Professional AmigaDOS C Compiler with, Text Management Utilities, Lattice Make Utility, Lattice Screen Editor, and the Metadigm MetaScope Debugger, \$375. AmigaDOS C Compiler \$150.

LATTICE RELEASES NEW VERSIONS OF C CROSS COMPILER AND LINKER

Version 3.1 of the Lattice C Cross Compiler to MS-DOS and version 2.12 of the Plink86Plus Overlay Linker are now available for Sun and Apollo workstations as well as the DEC VAX Family of processors running VMS, UNIX or Berkeley UNIX.

All Lattice C Cross Compilers possess the same functionality and generate the same code as the native Lattice MS-DOS C Compiler. This allows users to take advantage of the larger systems' speed and multi-user capabilities when creating applications for most popular PCs.


Contact Lattice Corporate Sales for details.



(800)533-3577 In Illinois (312) 858-7950 TELEX 532253 FAX (312) 858-8473

INTERNATIONAL SALES OFFICES: Benelux: Ines Datacom (32)2-720-51-61 Japan: Lifeboat, Inc. (03)293-4711 England: Roundhill (0672)54675 France: Echosoft (1)4824-54.04 Germany: Pfotenhaur (49)7841/5058 Hong Kong: Prima 85258442525 A.I. Soft Korea, Inc. (02)7836372 Australia: FMS (03) 699-9899 Italy: Lifeboat Associates Italia (02) 46-46.01

BOOKS



Numerical Recipes: The Art of Scientific Computing. Press, William H.; Flannery, Brian P.; Teukolsky, Saul A.; and Vetterling, William T. Cambridge, England: Cambridge University Press, 1986. \$40.

In the beginning, there was Hamming (1962). And Hamming begat Acton (1970), who begat Dahlquist and Bjorck (1974), who begat Ralston and Rabinowitz (1978), who begat Stoer and Burlisch (1980). Now we have Numerical Recipes, the latest addition to a fine line. For those who have worked with numerical analysis, it is a welcome addition to your arsenal; for those of you who are new to the subject or who have not yet begun to build your library, it is the one book to buy if you are going to have to solve anything numerically on a computer.

Content first-the book is comprehensive. It has the usual chapters on the solution of linear algebraic equations, interpolation and extrapolation, integration of functions, evaluation of functions, root finding and nonlinear sets of equations, minimization or maximization of functions, eigensystems, integration of ordinary differential equations, twopoint boundary value problems, and an introduction to partial differential equations. In addition, it contains a collection of chapters on topics not usually found in other books: special functions, random numbers, sorting, Fourier transform spectral methods, statistical description of data, and modeling of data. These chapters, together with the others, group in one place almost all the techniques that today's scientists and engineers commonly use to get the job done.

Issues of style come next. The knowledge of mathematics required to cope with the text is university level—that is, you should have some familiarity with linear algebra and calculus. The authors stay away from what I would consider an overly theoretical approach in both the text and the mathematical notation, although you do have to understand the normal amount of symbolic manipulation that comes when dealing with matrices, sums, and integrals.

In each subject area, the authors present several methods after discussing the problem in the introductory section of the chapter. Each section covers a method, with text and some equations as appropriate. Usually there is a FORTRAN subroutine at the end of the section, which not only illustrates the method but which can also be used to get real work done. (The authors have also translated all the subroutines-there are more than 200 of them-into Pascal and have included these in an appendix.) As they discuss each alternate method, the authors give you their candid opinion of the strengths and weaknesses of the approach, usually placing it in some historical context. There are references at the end of each section and a great bibliography at the end of the book. The references and bibliography alone are an invaluable source for getting more information when you need to go further.

The book's layout is clean. The type is easy to read, the choice of notation is excellent, and the programs are easy to follow because they are well commented. It is a little unfortunate that FORTRAN was chosen as the in-text language; this reflects FOR-TRAN's omnipresence in scientific computing but carries with it the terrible burden of short, elided names for variables. The Pascal versions suffer from being machine-translated from the FORTRAN. The authors promise to swap the FORTRAN and Pascal roles in the next edition and would like to hear from those folks who would like to see a C version. My vote would be for a clean implementation in Ada.

The authors have style. They chose the name of the book to be reminiscent of a cookbook, but in their words, there is a difference between a cookbook and a restaurant menu: "The latter presents choices among complete dishes in each of which the individual flavors are blended and disguised. The former-and this book-reveals the individual ingredients and explains how they are prepared and combined." The strength of the book is that with each recipe (read: computer subroutine), there is enough explanatory underpinning so that, with a reasonable amount of care and intelligence on the part of the reader, the proverbial bullet in the foot can be avoided. The authors' writing style makes the material easy to follow and not dull reading at all; it's great to see hard-earned experience come through as charm and

Although this book owes a debt to all its predecessors—most notably for its acknowledged stylistic similarity to Acton's—it is different in that it takes positions and makes judgments. It is a guidebook, where others are compendia. It consciously does not spend a lot of time on methods that the authors feel have been popular in the past but have now, perhaps recently, been superseded by others.

Supplementary materials, which I have not seen, are available-machine readable source for the subroutines in either language, example books that show how to use the subroutines, and machine readable versions of the example books. To get one complete set (one language) of everything costs less than \$60, which when coupled with the price of the book, is less than \$100. When you consider the amount of time it would take you to get a routine working when you need one, you would have to have an extremely low hourly rate not to be able to easily justify the cost of these materials.

-Joe Marasco

DDJ

Vote for your favorite feature/article. Circle Reader Service No. 10.

Think fast! Pick the better fit...

Our 5th Year Bonus! ordering 8
Our 5th this ad when a art on when the choice 520 orthase!
Nention tour 88 or purchase!
and get y 8088 Backup purchase!
(replaces en Batter) Backup purchase!
your Battery



FLOPPY DISK.

- Fills time between coffee breaks
- Makes a hard disk seem fast
- Your computer appears busy (even if you aren't!)
- Wears out moving parts



SEMIDISK Disk Emulator.

- Gets that job done NOW
- Makes a hard disk seem slow
- Maximizes your productivity with anything from databases to compilers
- Totally silent operation

...for YOUR demanding tasks.

SURPRISE! Neither is memory mapped, so they don't affect your precious Main Memory. Both retain data indefinitely - even with the computer turned off.

THE SEMIDISK SOLUTION. You could invest in a series of "upgrades" that turn out to be expensive band-aids without solving your real problem. Even those "Accelerator" and "Turbo" boards do little to speed up disk-bound computers. If your applications spend too much time reading and writing to disk (and whose don't?), you won't want to settle for anything less than a SemiDisk disk emulator. The SemiDisk comes in 512K and 2Mb capacity. More boards may be added to make up to an 8 Megabyte SemiDrive!

SPEED THAT'S COMPATIBLE. PC, XT or AT, if you need speed, the SemiDisk has it. How fast? Recent benchmarks show the SemiDisk is from 2 to 5 times faster than hard disks, and from 25% faster (writing) to several times faster (random reads) than VDISK and other RAMdisk software that gobble up your main memory.

MEMORY THAT'S STORAGE. Using our small external power supply, with battery backup, your data remains intact through your longest vacation or even a seven-hour power failure!

CELEBRATE WITH US! Now, SemiDisk celebrates its fifth birthday with a special offer for IBM-PC owners. Buy a SemiDisk now and we'll include an 8 MHz V-20 microprocessor (replaces the 8088) to make your new SemiDisk run even faster. Don't need the V-20? We'll take \$20 off the price of your Battery Backup Unit!

	512K	2Mbyte
IBM, PC, XT, AT	\$495	\$ 795
Epson QX-10	\$495	\$ 995
S-100 SemiDisk II	\$795	\$1295
S-100 SemiDisk I	\$299	
TRS-80 II, 12, 16	\$495	\$ 995
Battery Backup	\$130	\$ 130


Someday you'll get a SemiDisk. Until then, you'll just have to...wait.

SemiDisk





OF INTEREST



For the Amiga

Metacomco, the author of Amiga-DOS, has released an improved version of the Amiga command-line interpreter called Shell. Shell is a programming environment featuring command-line history and editing, aliases, path and push/pop directories, and variables. Shell is compatible with all standard command-line interpreters and sells for \$69.95. Reader Service No. 16.

Metecomco 5353 Scotts Valley Dr., #E Scotts Valley, CA 95066 (408) 438-7201

The latest version of the **Lattice** AmigaDOS C compiler has a new library with more than 100 functions and increased library modularity. Version 3.10 also features new addressing modes, fast pointer and integer math, fast IEEE floating-point routines, and multitasking support. The base-level compiler sells for \$225; the professional package (which includes text management and make utilities, screen editor, and debugger) costs \$375. Reader Service No. 17.

Lattice Inc. P.O. Box 3072 Glen Ellyn, IL 60138 (312) 858-7950

Central Coast Software has enhanced DOS-2-DOS, a disk-to-disk file transfer program for the Amiga that transfers all MS-DOS file types to and from AmigaDOS. DOS-2-DOS now supports 3½-inch 720K disks, formats both 3½- and 5¾-inch MS-DOS disks, converts ASCII file line-ending characters, and provides WordStar compatibility. The program costs \$55.

Reader Service No. 18. Central Coast Software 268 Bowie Dr. Los Osos, CA 93402 (805) 528-4906

For the Macintosh

The Complete Book of Macintosh Assembly Language Programming, Volume II, by Dan Weston features a collection of assembly-language projects that explore advanced topics in Mac programming. Published by Scott, Foresman & Co., the book covers the new ROM of the Mac Plus, how the clipboard is used and how it is converted by Switcher, and how to use the hierarchical file system and includes source code listings. It costs \$22.95. Reader Service No. 19.

Scott, Foresman & Co. 1900 E. Lake Ave. Glenview, IL 60025 (312) 729-3000

The APL*PLUS System for the Macintosh from STSC is a full-featured APL language interpreter. The system is compatible with STSC's APL*PLUS System for the IBM PC and allows existing applications to be converted and run on the Mac. The package takes advantage of standard Mac features, and common desk accessories can be used from the APL environment. The APL*PLUS System for the Macintosh runs on a Macintosh with at least 512K RAM and one disk drive and sells for \$395. Reader Service No. 20. STSC Inc.

2115 E. Jefferson St. Rockville, MD 20852 (800) 592-0050

Miscellaneous

Real-Time Computer Science Corp. (RTCs) is now shipping RTX286, a real-time, multitasking, multiuser operating system for the IBM PC/AT. RTX286 is a complete implementation of Intel's iRMX286 operating system specifically configured for the AT and its peripheral devices. It takes advantage of the protected mode of the iAPX286 processor, offering memoryaccess protection as well as allowing users to access up to 16 megabytes of memory directly. RTX286 is priced at \$2,395, and RTX286-C (a configurable

version) costs \$2,795. Reader Service
No. 21.
Real-Time Computer Science Corp.
(RTCS)
1390 Flynn Rd.
Camarillo, CA 93010
(805) 987-9781

Syncra PC, from Eastman Communications, is a software package that allows error-free transfer of documents and files among IBM PCs and compatibles. The program must be operating on both the transmitting and receiving computers in order to transfer data. It can also communicate directly with corresponding Syncra software packages on DEC VAX and IBM OS/DOS mainframes and System/36 minis. Syncra PC uses an asynchronous protocol and can be transmitted between 1,200 and 9,600 bps. An automated feature allows completely unattended operation. A data-compression/compaction feature allows document and file sizes to be reduced by 50 percent or more. Retail price is \$79. Reader Service No. 22.

Eastman Communications 1099 Jay St. Rochester, NY 14650 (716) 464-5500

Boca Research's BOCARAM is available for IBM PCs, PC/XTs (including the XT 286), PC/ATs, and compatibles. BO-CARAM fits into the XT 286 box, connecting to the 8-bit connector to expand its memory from 640K to 2 megabytes per board. The board conforms to EMS 3.2, which permits the use of application software packages that access memory up to 8 megabytes. BOCARAM software includes a RAM disk, print spooler, and memory diagnostic program in addition to the Boca Research Expanded Memory Manager driver. Prices range from \$245 to \$740, depending on the amount of memory. Reader Service No. 23.

Boca Research 6104 Congress Ave. Boca Raton, FL 33431 (305) 997-6227

Discovery Systems has released an audio-cassette training program for Autodesk's AutoLISP, a training course for AutoCAD users. The eight lessons provide a step-by-step program with complete instructions to create custom AutoLISP functions, custom menus, and other timesaving utilities. The price is \$179. Reader Service No. 24.
Discovery Systems
34 Autumnleaf
Irvine, CA 92714
(714) 733-9890

American Computer & Peripheral has introduced an accelerator card that utilizes the 80386 microprocessor. The 386 TURBO board can bring a 6-MHz IBM PC/AT or compatible up to 12 MHz and an 8-MHz computer up to 16 MHz. Clock rates are switchable through software without rebooting. Software written for the AT (including DOS, ROM BIOS, EGA ROM, and so on) executes from a 1-megabyte cache memory. The board sells for \$1,995. Reader Service No. 25. American Computer & Peripheral

2720 Croddy Wy. Santa Ana, CA 92704 (714) 545-2004

Inc.

TEFT (Terminal Emulator and File Transfer) from S. M. Vorkoetter Software allows an IBM PC, PC/XT, PC/AT, PCir, or compatible to be used as an intelligent terminal for communicating with a host computer or a BBS. Features of TEFT include VT100 terminal emulation, text file transfer, conversion of binary files to text files and vice versa, a batch mode, and baud rates from 50 to 9,600 baud (50 to 4,800 on a PCir). The product requires 128K RAM, one disk drive, and an IBMcompatible serial adapter card. TEFT is not copy-protected and is priced at \$60. Reader Service No. 26. S. M. Vorkoetter Software P.O. Box 872 Waterloo, Ont. Canada N2J 4C3

SK DOS, from **Star-K Software Systems**, is a single-user operating system for 68xxx-based machines. This generic DOS is easily implemented on a new system and allows programs written for one system to run on many others. It includes more than

40 commands and system programs, including a 6809 emulator. SK DOS sells for \$125. Reader Service No. 27. Star-K Software Systems P.O. Box 209

Mt. Kisco, NY 10549 (914) 241-0287

Electronic Specialists has released an RS-232 bus-protection device called Kleen Line. The Kleen Line security system is designed to suppress damaging line spikes caused by lightning or large electrical machinery. Units can be configured with any, or all, of the RS-232 bus lines protected. Model PDS-232 M/F, which guards lines 1, 2, 3, and 7, sells for \$143. Reader Service No. 28.

Electronics Specialists Inc. 171 S. Main St. Natick, MA 01760 (617) 655-1532.

Polytron Corp. has introduced Poly-Shell, a DOS extender and command interpreter that adds a Unix interface and much of the capability and flexibility of Unix to MS-DOS. The shell consists of two major components: the Command Interpreter, which can be used instead of or in conjunction with the MS-DOS command interpreter; and the PolyShell Utility Set, which includes several utilities previously associated only with the Unix operating system. PolyShell is invoked as a program under DOS, and any MS-DOS commands can be called from within the shell. PolyShell runs on the IBM PC. PC/XT, PC/AT, and compatibles with DOS 2.0 or later and requires at least 256K RAM. A hard disk is recommended. A single-user license costs \$149. Reader Service No. 29.

Polytron Corp. 1815 N.W. 169th Pl. Ste. 2110 Beaverton, OR 97006 (503) 645-1150

Graphics

Dynaware has released Dynaperspective, a 3-D solid modeling graphics software package for PC-DOS machines. Dynaperspective currently has drivers for the following graphics boards: EGA, Number Nine Revolution, Artist1, and Artist2. In addition to the graphics boards, Dynaperspective also supports most major plotters, printers, mice, and digitizing tablets. The package sells for \$1,850. Reader Service No. 30.

Dynaware 1309 114th SE, Ste. 303 Bellevue, WA 98004 (206) 451-0200

Windows Draw from **Micrografx** is a free-form graphics program that runs under Microsoft Windows. Windows Draw images are object-based rather than pixel-based and thus achieve device independence, which allows the images to be printed with the maximum resolution of the printer rather than that of the computer. Windows Draw includes Windows ClipArt (a collection of Windows-compatible artistic images) and sells for \$299. Reader Service No. 31.

Micrografx Inc. 1820 N. Greenville Ave. Richardson, TX 75081 (214) 234-1789

Another graphics package designed for use with Microsoft Windows is Cricket Graph, from **Cricket Software**. Designed to run on the Macintosh, the package has page-layout capabilities and supports a variety of printers, plotters, and film recorders. It also offers a variety of editing and data manipulation capabilities: data can be sorted; grouped by ranges of values; smoothed; and transformed by logarithmic, trigonometric, exponential, and statistical functions. Cricket Graph sells for \$295. Reader Service No. 32.

Cricket Software 3508 Market St., Ste. 206 Philadelphia, PA 19104 (800) 345-8112 (215) 387-7955

Surf3-D/Surf87 from **dogStar Soft-ware** is a 3-D surface plotting program written in Turbo Pascal and using TurboHALO graphics routines. The program can work with most MS-DOS display screens and printers. The program calculates and plots the surface of selected *x,y* functions or a function you supply and permits you

OF INTEREST

(continued from page 149)

to rotate the surface about any axis. You can select scaling factors, surface hatching, and other options. The 3-D plotting routines include optional 8087 math coprocessor support that is optimized for rotation. Source code is included. Surf3-D/Surf87 is a shareware product; a donation of \$10 is suggested. Reader Service No. 33. dogStar Software P.O. Box 302 Bloomington, IN 47402 (812) 333-5616

The Hot Shot graphics printer interface for Commodore computers from Omnitronix supports graphics printing on most popular dot-matrix printers. It has a standard internal 1K × 4 graphics buffer that can be expanded to 8K to help speed up printing. Screen dumps can be set for reverse or inverse printing, and on many printers you can select enhanced, double-density printing of graphics screens and graphics characters. Hot Shot sells for \$59.95. Reader Service No. 34.

Omnitronix Inc. 760 Harrison St. Seattle, WA 98109 (206) 624-4985

For the Mac

The MacBus/RTI-800 series software, from National Instruments, allows control of the Analog Devices RTI-800 series analog and digital I/O boards with the Macintosh Plus using Mac-Bus. The software enables users to program the boards with Microsoft BASIC, Megamax C, and LabVIEW (LabVIEW and C application examples are included and fully explained). MacBus/RTI-800 series software sells for \$195. Reader Service No. 35

National Instruments 12109 Technology Blvd. Austin, TX 78727-6204 (800) 531-4742 In TX (800) IEEE-488 (512) 250-9119

MacroMind has realeased Maze Wars+, a real-time multiplayer game for the AppleTalk network that is a direct descendent of the classic Maze Wars game from MIT and Xerox PARC in the early 70s. A terminal program is built into the game to allow connection with another player via 1,200-2,400-baud modem or by direct null modem. Messages can also be passed back and forth. Maze Wars+ is not copy-protected and costs \$49.95; site licenses are available for \$15 per node. Reader Service No.

MacroMind Inc. 1028 W. Wolfram St. Chicago, IL 60657 (312) 871-0987

OWL International has released a hypertext system for the Mac called Guide. Guide incorporates many features of standard word processors and outline processors as well as additional facilities for information management, such as annotation and cross-referencing. Guide requires a 512K Mac, Mac Plus, or Mac XL and can work with any graphics program that supports the clipboard. It can be used with MacWrite, Microsoft Word, Aldus Pagemaker, or any program that can read MacWrite files. Guide sells for \$134.95. Reader Service No. 37.

OWL International Inc. 14218 N.E. 21st St. Bellevue, WA 98007 (206) 747-3203

Bering Industries has developed a line of 51/4-inch removable cartridge systems for the Mac. The new line of Bernoulli drives, called Totem, includes three models: a single 20-megabyte removable cartridge for \$1,495; a dual 20-megabyte removable cartridge for \$2,295; and a combination 20-megabyte removable cartridge plus a 20-megabyte fixed hard disk for \$2,295. Bering also sells a 20megabyte 51/4-inch fixed drive for the Mac for \$795. Reader Service No. 38. **Bering Industries** 250 Technology Circle Scotts Valley, CA 95066 (408) 438-8779

For the PC

IOTools, from Rhoads Software, provides terminal-independent I/O mapping with a constant programming interface. The package gives you control over console, asynchronous, and parallel I/O as well as several useful library modules. It makes for easy management of the characters from the keyboard and includes more than 15 modules that export more than 200 procedures. Formats are available for MS-DOS/Logitech and Pecan, and the price is \$79.50, or \$950 for source code. Reader Service No. 39.

Rhoades Software 504 Meeting House Ln. Kennett Square, PA 19348 (215) 388-2626

Command Plus, from ESP Software Systems, is a command processor for MS-DOS machines that simplifies and enhances MS-DOS' Command features as well as offering many additional features such as a batch programming language with a Pascallike syntax called SCRIPT. Other new features include command macros, command recall, file browsing, a log facility, the ability to access environment variables from the command line, and the ability to select files using ESP's extended file-name patternmatching facility. Command Plus sells for \$79.95.Reader Service No. 40. ESP Software Systems Inc. 11965 Venice Blvd., Ste. 309 Los Angeles, CA 90066

(213) 390-7408

Sapiens V8, from Sapiens Software Corp., is a virtual memory manager for C programmers on the PC. Features include 8 megabytes of virtual memory workspace, the ability to link V8 libraries to C compilers, and software emulation of 64-bit architectures. Sapiens V8 sells for \$300. Reader Service No. 41. Sapiens Software Corp. P.O. Box 7720 Santa Cruz, CA 95061-7720

DDJ

(408) 458-1990

ADVERTISER INDEX

Read		Read	
Servi	0	Servi	ce Page
No.	Advertiser No.	No.	Advertiser No.
369	Aker Corporation 91	*	Micromint 67
350	Aldebaran Laboratories 27	105	Microprocessors Unlimited 74
321	Alpha Computer Service 92	380	Microsoft4-5
273	Alsys 49		Micro/Systems Journal 116
396	AT&T Technology1	249	Mortice Kern Systems, Inc 85
250	Austin Code Works 113	*	MS-DOS Tools & Enhancements 117
182	BC Associates	309	Nanosoft Associates130
159	Blaise Computing2	220	Nantucket Corporation 137
217	Blaise Computing129	243	Norton Utilities (The)100
263	Block Island Tech 59	251	Nostradamus
161	Borland International	227	Oakland Group, Inc 81
384	Boston Software Works (The) 29	254	Oasys
387	Bryte Computer 59	130	Orchid Technology 15
212	Burton Systems Software 74	214	Periscope Co. Inc 120
*	Business Software142	343	Phar Lap Software 65
	C Toolbox	239	PMI
181	C Users Group	283	Polytron Corporation
122	Compu View	229	Port-A-Soft99
348	Creative Computer Software 58	129	Programmer's Connection75-77
	Creative Programming	98	Programmer's Connection 33
379	Crescent Software86	133/	
268	Custom Software Systems 119	141	Programmers Shop (The)88-89
•	DDJ Back Issues 96	301-	
*	DDJ Listings 104	304	Programmers Shop (The) 93
	DDJ Subscriptions 36	Photos:	Quaid Software 59
203	Datalight9	144	Quantum Computing112
258	Desktop A.I 78	•	Raima Corporation 103
127	Digitalk 13	393	Ramnet 42
89	Ecosoft, Inc		SAS Institute 55
138	Essential Software	168	Sapiens Software 82
93	Fair-Com	391	Scantel Systems Limited LTD 86
373	Genesis Data Systems 80	210	Scientific Endeavors 90
	Gimpel Software 83	394	Secom Information Products Co 95
	Gimpel Software	114	Seidl Computer Engineering 66
291	Gold Hill Computers, Inc20-21	85	Semi-Disk Systems147
97	Greenleaf Software 131	78	SLR Systems 78
351	Guidelines Software 73	40	Soft Craft Inc 24
132	Harvard Softworks 98	259	Softfocus
376	Hi-Tech Software 80	218	Software Directions, Inc 57
327	Integral Quality, Inc	314	Software Garden Inc
190	Intel Corporation	347	Software Masters
	Jou Laboratories	170	
355			Software Security, Inc
294	Kurtzberg Computer Systems 97	372	Softway
101	Lattice, Inc	142	Solution Systems
118	Lifeboat	152	Solution Systems
359	Lifeboat	236	Springer-Verlag
257	Logitech, Inc 69	363	Summit Software Technology, Inc 87
135	Lugaru 85	395	Sutrasoft 58
•	M&T Catalog of Books & Software		TeleOperating Systems 127
	ToolsPB		Texas Instruments 54
313	Magma Systems 61	230	The Software Family 47
336	Magus Inc 85		Turbo Pascal Tools 63
108	Manx Software Systems7	119	Turbo Tech Report 44
317	Marshal Language Systems 56	332	Unify Corporation 79
285	MDS, Inc100	316	Upland Software 40
397	Meridian Software Systems 35	157	Vermont Creative Software 53
392	Metagraphics100	112	Wendin 11
95	MetaWare Incorporated 90	282	Whitewater Group (The) 43
300	Micro Way	244	Workman & Associates 141
286	Microcompatibles	225	Xenosoft
215	MicroHelp, Inc		
210			

*This advertiser prefers to be contacted directly: see ad for phone number.

ADVERTISING SALES OFFICES


Southeast /Midwest Gary George (404) 897-1923

Northeast Cynthia Zuck (718) 499-9333 Northern California/Northwest Lisa Boudreau (415) 366-3600

Southern California/AZ/NM/TX Michael Wiener (415) 366-3600

Director of Marketing and Advertising Ferris Ferdon (415) 366-3600

#1 C interpreter



The professional C development environment

Your C compiler creates great final code . . . but as a programming tool, it's too, too slow. With C-terp you can edit, debug, and run without the wait. Nothing, but nothing, is faster for developing professional C programs.

Choose the perfect C-terp companion for your C compiler

C-terp/Microsoft C-terp/XENIX
C-terp/Lattice C-terp/Aztec
C-terp/Mark Williams C-terp/C86

Link in all your compiler's functions, your own functions, add-on libraries, assembly routines, and data objects. Get instant access to everything in the C-terp interactive environment.

Only C-terp offers all this and more

- Full K&R with common ANSI enhancements
- Source level interactive debugging
- Software paging for your big jobs
- Complete multi-module support
- Run-time pointer checking
- Unsurpassed reconfigurable screen editor
- Dual display and full graphics support
- Large model Call-in

ORDER C-terp TODAY (specify compiler)

C-terp runs on IBM PC, AT or compatibles.

Price.

MS-DOS 2.x and up - \$298, Xenix System V 286 - \$498 MC, VISA, COD 30-day money-back GUARANTEE

Trademarks: C-terp (Gimpel Software), C86 (Computer Innovations), Lattice (Lattice, Inc.), Xenix, Microsoft, MS-D0S (Microsoft, Inc.), Azlec (Manx Software), Mark Williams (Mark Williams Company), IBM (International Business Machines, Inc.)

GIMPEL SOFTWARE

3207 Hogarth Lane, Collegeville, PA 19426

(215) 584-4261

SWAINE'S FLAMES


teve Jasik could reasonably call his *MacNosy V2 Documentation V2.50* the most eagerly awaited manual of the year. It's not that drooling hordes of programmers have been demanding this Macintosh disassembler—it's still an underappreciated marvel—but those of us who grappled with the original documentation were wet-chinned with anticipation.

The new manual fairly describes Nosy as an information-recovery tool for the Mac, a description justified by the on-line Inside Mac feature alone. I was so eager to use Nosy that I rashly agreed to help revise the original manual, bailing out only when I realized that I would have to understand Nosy intimately to improve the documentation and that there was no way I was going to get Nosy literate from Steve's manual.

Others were more successful, and the resulting documentation is not only comprehensible but also strewn with uncloneable Jasikisms from the Head Nose.

Nosy would be a handy tool for, say, an independent programmer developing desk accessories that worked intimately with Microsoft Excel. Tools for programmers working in teams have been slower in coming than such individual tools, but computer-aided software engineering (CASE) has taken a step forward with the arrival of commercially priced 32-bit machines at a time when successes in CAD/CAM are ripe for translation to general software development.

Rich Carpenter of Index Technologies, a Cambridge, Massachusetts, CASE company, argued at the Personal Computer Forum in Phoenix this spring that current software-development approaches have been borrowed from engineering situations in which, for example, it was prohibitively expensive to move elevators



after putting up inside walls. Software development needs its own models for, and tools in support of, design, specification, prototyping, version management, testing, debugging, and documentation.

Software development also needs better tools. One of the advantages of C is that you can get fairly efficient code out of primitive compilers, which could be a fair assessment of 1986-vintage microcomputer compiler technology. Not-so-primitive optimizing compilers are now arriving: I know of five optimizing C compilers released or in the works, and Microsoft's FORTRAN compiler is one of the most sophisticated optimizing compilers on personal computers. It will, for example, turn

 $y = \sin(x)^{**}2$

into the faster

temp = sin(x)y = (temp*temp)

Scientific and engineering users of personal computers can expect more than just a fast FORTRAN from software companies, though. Both Lotus and Borland now have engineering and scientific divisions dedicated to developing products for this group, which Lotus says accounts for 17 percent of its existing user base. Lotus is even considering starting a magazine for scientists and engineers.


Legal issues: ADAPSO's efforts to get software vendors to voluntarily pro-

vide substantive warranties rather than "as is" disclaimers on products has led a member of the California Assembly, Gloria Molina, to recommend against legislation to force warranties. The Copyright Office has judged Lotus' 1-2-3 user interface uncopyrightable from a look-and-feel standpoint because it is basically text. And several senators are reintroducing a bill to create an Information Age Commission, whose purpose would be to study the impacts of high technology.

Memorable moments at the Personal Computer Forum: hearing that the personal computer industry looks willing to give Bill Gates a billion-dollar company in exchange for a little stability; Mitch Kapor deftly fending off an embarrassing question about the Lotus look-and-feel suit by attacking David Bunnell's editorial on the Georgia sodomy law; and the following story:

"The editor kept calling our product a database and I said, 'It's really a programming language.' But he said, 'We don't cover languages, Bruce.' So I said, 'Well, really it's more of a database.' Then everything was fine.''

This story was related by a software company president during a dinner at which several software company CEOs told M&T executives horror stories about the technical incompetence of the computer press, including the story of the product that got rave reviews for a "feature" that was really a bug the company had been trying to eliminate for months. The hard work that goes into developing a good program deserves competent reporting.



Michael Swaine editor-in-chief



Some Of The Most Famous Faces In Software Use Our C Functions

Our famous customers are a little camera shy. It's not that they are embarrassed by being Essential C Utility Library users. They just don't want us shouting their names from the roof tops.

The prestige of our users is not the primary reason to buy the Essential C Utility Library. The increased speed, features, and size efficiency of our products are the factors that demand their use. Our library contains *over 400*

functions, all designed with elegance in mind.

However, should curiosity get the best of you, call us at 201-762-6965 and we'll drop a few highly impressive names on you.



Behind every great program is a great library.

What's a Library Without a Librarian?

Our library comes complete with a sophisticated source code librarian. Now you can maintain current versions and conserve disk space. We want your development work to go as smoothly as possible.

No Royalties, 30 Day Guarantee

If within 30 days you don't find our library totally satisfactory, bag the whole thing and receive a complete refund. There are no royalties associated with the library.

Functions At A Glance

- Fastest screen output available.
- Save/Restore color screens in 1/10 sec.
- Pop-up block cursor menus
- Save/Restore windows to disk or memory
- 50 functions for business graphics
- dozens of string formats
- time and date arithmetic
- julian and day-of-week
- · Ctrl-Break key trapping
- · Field oriented data entry
- Stuff keyboard buffer18 Mouse control functions
- Execute programs and batch files

- Disk error trapping
- Determine space available
- 40 functions to process characters and words
- Insert, delete, extract, index, translate
- Tested, easy-to-follow examples
- Demo programs with source code
- All source code included

Documentation:

Thorough, comprehensive, 260 pages


Compatible C Compilers:

Microsoft, Lattice, Computer Innovations, Aztec, Mark Williams, DeSmet, and Wizard

\$250.00

Do Your Homework

The library you buy can influence the rest of your programming life. We encourage you to do some checking before making a decision. When you've done your homework, you'll choose Essential. Call our support staff of experienced C programmers and find out before you buy how things will be after your check clears.



To order or for support call: 201-762-6965 For foreign orders contact:

England: Gray Matter Tel. (0364) 53499 Japan: Lifeboat Inc. of Japan Tel: 293 4711 West Germany: Omnitex Tel. 07623-61820

Essential Software, Inc.

P.O. Box 1003, Maplewood, New Jersey 07040



Turbo C: The fastest, most efficient and easy-to-use C compiler at any price

Compilation speed is more than 7000 lines a minute, which makes anything less than Turbo C an exercise in slow motion. Expect what only Borland delivers: Quality, Speed, Power and Price.

Turbo C: The C compiler for amateurs and professionals

If you're just beginning and you've "kinda wanted to learn C," now's your chance to do it the easy way. Like Turbo Pascal, Turbo C's got everything to get you going.

If you're already programming in C, switching to Turbo C will considerably increase your productivity and help make your programs both smaller and faster. Actually, writing in Turbo C is a highly productive and effective method—and we speak from experience. Eureka: The Solver" and our new generation of software have been developed using Turbo C.

Turbo C: a complete interactive development environment

Free MicroCalc spreadsheet with source code

Like Turbo Pascal® and Turbo Prolog," Turbo C comes

with an interactive editor that will show you syntax errors right in your source code. Developing, debugging, and running a Turbo C program is a snap.

Turbo C: The C compiler everybody's been waiting for. Everybody but the competition

Borland's "Quality, Speed, Power and Price" commitment isn't idle corporate chatter. The \$99.95 price tag on Turbo C isn't a "typo," it's real. So if you'd like to learn C in a hurry, pick up the phone. If you're already using C, switch to Turbo C and see the difference for yourself.

System requirements

IBM PC, XT, AT or true compatibles. PC-DOS (MS-DOS) 2.0 or later. One floppy drive. 320K.

*Introductory price—good through July 1, 1987

Technical Specifications

- ✓ Compiler: One-pass compiler generating linkable object modules and inline assembler. Included is Borland's high performance "Turbo Linker." The object module is compatible with the PC-DOS linker. Supports tinky, small, compact, medium, large, and huge memory model libraries. Can mix models with near and far pointers. Includes floating point emulator (utilizes 8087/80287 if installed).
- ✓ Interactive Editor: The system includes a powerful, interactive full-screen text editor. If the compiler detects an error, the editor automatically positions the cursor appropriately in the source code.
- ✓ Development Environment: A powerful "Make" is included so that managing Turbo C program development is highly efficient. Also includes pull-down menus and windows.
- ✓ Links with relocatable object modules created using Borland's Turbo Prolog into a single program.
- ANSI C compatible.
- ✓ Start-up routine source code included.
- ☑ Both command line and integrated environment versions included.

Turbo C and Turbo Pascal are registered trademarks and Turbo Prolog and Eureka: The Solver are trademarks of Borland International, Inc. Microsoft C and MS-DOS are registered trademarks of Microsoft Corp. IBM, XT, and AT are registered trademarks of International Business Machines Corp. Copyright 1987 Borland International BI-1104

Sieve benchmark (25 iterations)

	Turbo C	Microsoft® C	Lattice C
Compile time	3.89	16.37	13.90
Compile and link time	9.94	29.06	27.79
Execution time	5.77	9.51	13.79
Object code size	274	297	301
Price	\$99.95	\$450.00	\$500.00


Benchmark run on a 6 Mhz IBM AT using Turbo C version 1.0 and the Turbo Linker version 1.0; Microsoft C version 4.0 and the MS overlay linker version 3.51; Lattice C version 3.1 and the MS object linker version 3.05.



4585 SCOTTS VALLEY DRIVE SCOTTS VALLEY, CA 95066 (408) 438-8400 TELEX: 172373



Vive la différence

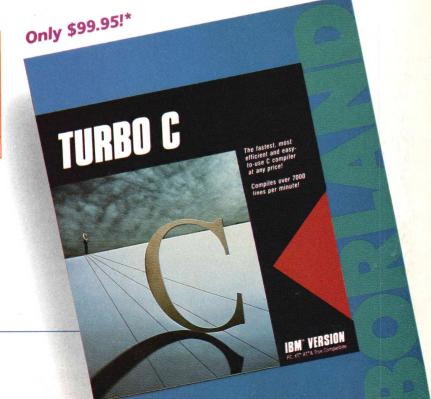

For the dealer nearest you or to order by phone call

(800)255-8008

in CA (800) 742-1133 in Canada (800) 237-1136 CIRCLE 161 ON READER SERVICE CARD